

## Surface mount diode

Schottky barrier rectifiers  
diodes

**SM 5817...SM 5819**

**Forward Current: 1 A**

**Reverse Voltage: 20 to 40 V**

## Features

- Max. solder temperature: 260°C
- Plastic material has UL classification 94V-0

## Mechanical Data

- Plastic case Melf / DO-213AB
- Weight approx.: 0,12 g
- Terminals: plated terminals solderable per MIL-STD-750
- Mounting position: any
- Standard packaging: 5000 pieces per reel

1) Max. temperature of the terminals  $T_T = 100^\circ\text{C}$

2)  $I_F = 3 \text{ A}$ ,  $T_j = 25^\circ\text{C}$

3)  $T_A = 25^\circ\text{C}$

4) Mounted on P.C. board with 25 mm<sup>2</sup> copper pads at each terminal

Type	Polarity color band	Repetitive peak reverse voltage	Surge peak reverse voltage	Maximum forward voltage $T_j = 25^\circ\text{C}$ $I_F = 1 \text{ A}$	Maximum reverse recovery time $I_F = -A$ $I_R = -A$ $I_{RR} = -A$ $t_{rr} = t_{rr}$ ns
SM 5817	-	20	20	0,75	-
SM 5818	-	30	30	0,875	-
SM 5819	-	40	40	0,9	-

## Absolute Maximum Ratings


$T_c = 25^\circ\text{C}$ , unless otherwise specified

Symbol	Conditions	Values	Units
$I_{FAV}$	Max. averaged fwd. current, R-load, $T_T = 100^\circ\text{C}$	1	A
$I_{FRM}$	Repetitive peak forward current $f > 15 \text{ Hz}^1)$	10	A
$I_{FSM}$	Peak fwd. surge current 50 Hz half sinus-wave <sup>3)</sup>	30	A
$I^2t$	Rating for fusing, $t < 10 \text{ ms}^3)$	4,5	A <sup>2</sup> s
$R_{thA}$	Max. thermal resistance junction to ambient <sup>4)</sup>	45	K/W
$R_{thT}$	Max. thermal resistance junction to terminals	10	K/W
$T_j$	Operating junction temperature	-50...+150	°C
$T_s$	Storage temperature	-50...+150	°C

## Characteristics

$T_c = 25^\circ\text{C}$ , unless otherwise specified

Symbol	Conditions	Values	Units
$I_R$	Maximum leakage current, $T_j = 25^\circ\text{C}$ ; $V_R = V_{RRM}$ $T_j = 100^\circ\text{C}$ ; $V_R = V_{RRM}$	<1 <10	mA mA
$C_J$	Typical junction capacitance (at MHz and applied reverse voltage of V)	-	pF
$Q_{rr}$	Reverse recovery charge ( $U_R = V$ ; $I_F = A$ ; $dI_F/dt = A/\text{ms}$ )	-	μC
$E_{RSM}$	Non repetitive peak reverse avalanche energy ( $I_R = \text{mA}$ ; $T_j = \text{°C}$ ; inductive load switched off)	-	mJ

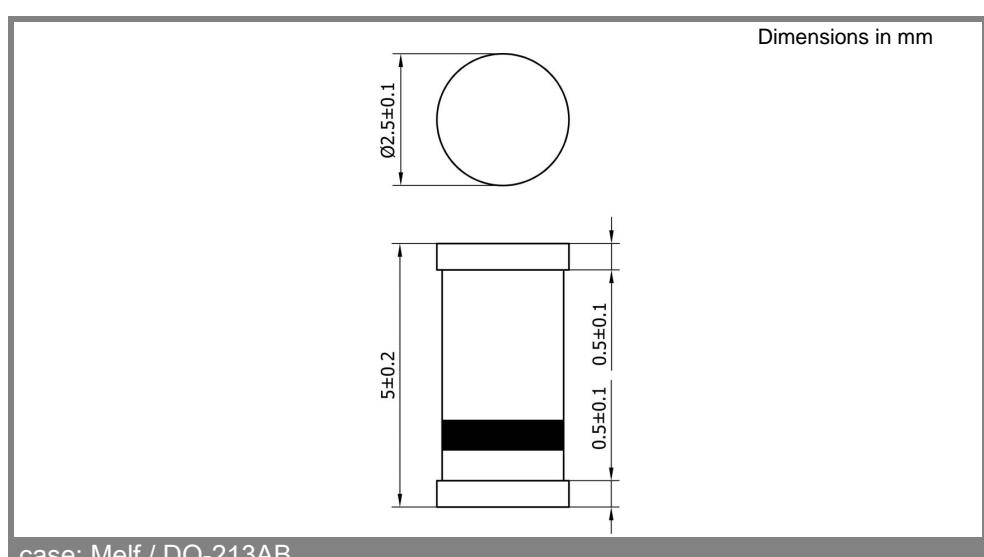

case: Melf / DO-213AB

# SM 5817...SM 5819

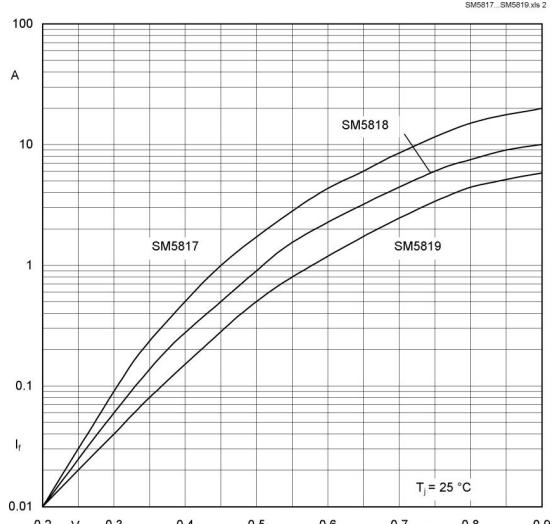


Fig. 1 Forward characteristic ( typical values )

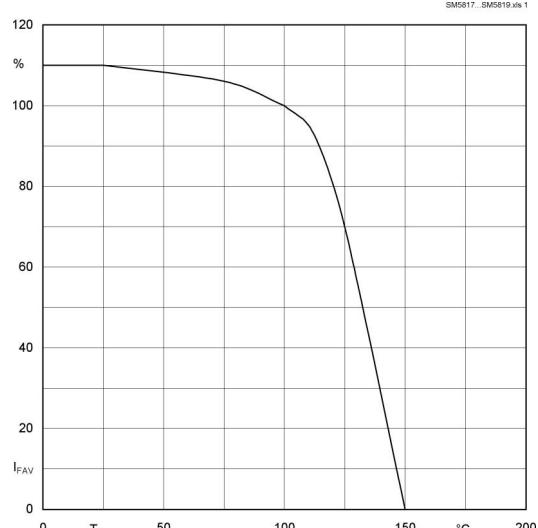


Fig. 2 Rated forward current vs. temp. of the terminals<sup>4)</sup>