


# 3 Amp Schottky Rectifier

## MS345

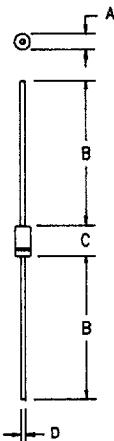

Dim.	Inches		Millimeter		
	Minimum	Maximum	Minimum	Maximum	Notes
A	.188	.260	4.78	6.50	Dia.
B	1.00	---	25.4	---	
C	.285	.375	7.24	9.52	
D	.046	.056	1.17	1.42	Dia.

PLASTIC D0201AD

Microsemi Catalog Number	Working Peak Reverse Voltage	Repetitive Peak Reverse Voltage	• Schottky Barrier Rectifier • Guard Ring Protection • 175°C Junction Temperature • V <sub>RRM</sub> to 45 Volts
MS345	45V	45V	

Electrical Characteristics		
Average forward current	I <sub>F(AV)</sub> 3.0 Amps	T <sub>A</sub> = 140°C, Square wave, R <sub>θJL</sub> = 17°C/W, L = 1/8"
Average forward current	I <sub>F(AV)</sub> 3.0 Amps	T <sub>A</sub> = 130°C, Square wave, R <sub>θJL</sub> = 23°C/W, L = 3/8"
Maximum surge current	I <sub>FSM</sub> 150 Amps	8.3ms, half sine, T <sub>J</sub> = 175°C
Max peak voltage	V <sub>FM</sub> .60 Volts	I <sub>FM</sub> = 1.0A; T <sub>J</sub> = 25°C*
Max peak forward voltage	V <sub>FM</sub> .65 Volts	I <sub>FM</sub> = 3.0A; T <sub>J</sub> = 25°C*
Max peak forward voltage	V <sub>FM</sub> .80 Volts	I <sub>FM</sub> = 9.4A; T <sub>J</sub> = 25°C*
Max peak reverse current	I <sub>RM</sub> 100 μA	V <sub>RRM</sub> ; T <sub>J</sub> = 25°C
Typical junction capacitance	C <sub>J</sub> 260 pF	V <sub>R</sub> = 5.0V, T <sub>J</sub> = 25°C

\*Pulse test: Pulse width 300 μsec, Duty cycle 2%

Thermal and Mechanical Characteristics		
Storage temperature range	T <sub>STG</sub>	-40°C to 175°C
Operating junction temp range	T <sub>J</sub>	-40°C to 175°C
Maximum thermal resistance	L = 1/8" R <sub>θJL</sub>	17°C/W Junction to Lead
	L = 3/8" R <sub>θJL</sub>	23°C/W Junction to Lead
Weight		.032 ounces (1.0 grams) typical

PH: 303-469-2161  
FAX: 303-466-3775

**Microsemi Corp.  
Colorado**

C-67

# MS345

Figure 1  
Typical Forward Characteristics

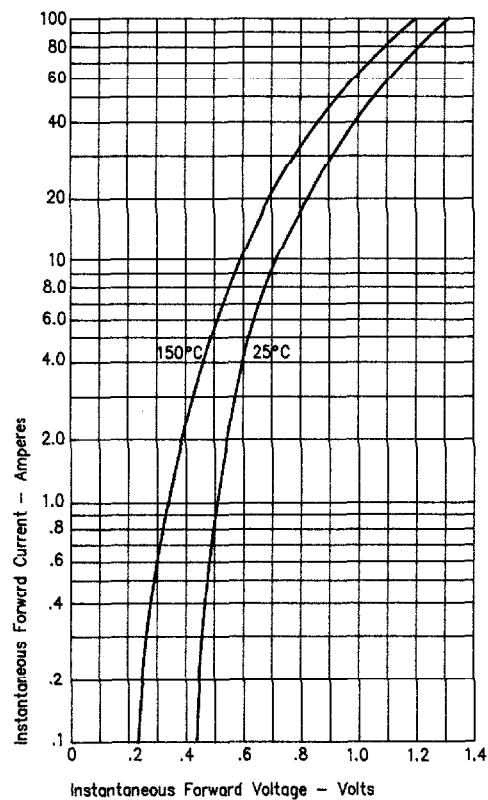


Figure 3  
Typical Junction Capacitance

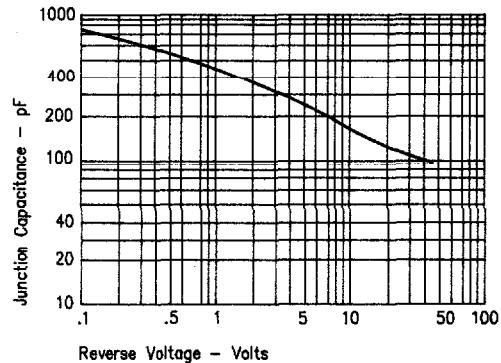


Figure 2  
Typical Reverse Characteristics

