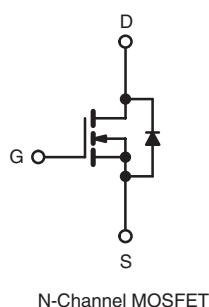



Power MOSFET

PRODUCT SUMMARY	
V _{DS} (V)	500
R _{D(on)} (Ω)	V _{GS} = 10 V 0.320
Q _g (Max.) (nC)	92
Q _{gs} (nC)	24
Q _{gd} (nC)	44
Configuration	Single

TO-220 FULLPAK



FEATURES

- Super Fast Body Diode Eliminates the Need for External Diodes in ZVS Applications
- Lower Gate Charge Results in Simpler Drive Requirements
- Enhanced dV/dt Capabilities Offer Improved Ruggedness
- Higher Gate Voltage Threshold Offers Improved Noise Immunity
- Lead (Pb)-free

APPLICATIONS

- Zero Voltage Switching SMPS
- Telecom and Server Power Supplies
- Uninterruptible Power Supplies
- Motor Control Applications

ORDERING INFORMATION

Package	TO-220 FULLPAK
Lead (Pb)-free	IRFIB7N50LPbF
	SiHFIB7N50L-E3

ABSOLUTE MAXIMUM RATINGS T_C = 25 °C, unless otherwise noted

PARAMETER	SYMBOL	LIMIT	UNIT
Drain-Source Voltage	V _{DS}	500	V
Gate-Source Voltage	V _{GS}	± 30	
Continuous Drain Current	V _{GS} at 10 V	T _C = 25 °C	A
		T _C = 100 °C	
Pulsed Drain Current ^a	I _{DM}	27	W/°C
Linear Derating Factor		0.37	
Single Pulse Avalanche Energy ^b	E _{AS}	550	mJ
Avalanche Current ^a	I _{AR}	6.8	A
Repetitive Avalanche Energy ^a	E _{AR}	4.6	mJ
Maximum Power Dissipation	P _D	46	W
Peak Diode Recovery dV/dt ^c	dV/dt	24	V/ns
Operating Junction and Storage Temperature Range	T _J , T _{stg}	- 55 to + 150	°C
Soldering Recommendations (Peak Temperature)	for 10 s	300 ^d	
Mounting Torque	6-32 or M3 screw	10	lbf · in
		1.1	N · m

Notes

- Repetitive rating; pulse width limited by maximum junction temperature (see fig. 12).
- Starting T_J = 25 °C, L = 24 mH, R_G = 25 Ω, I_{AS} = 6.8 A (see fig. 14).
- I_{SD} ≤ 6.8 A, dI/dt ≤ 650 A/μs, V_{DD} ≤ V_{DS}, dV/dt = 24 V/ns, T_J ≤ 150 °C.
- 1.6 mm from case.

THERMAL RESISTANCE RATINGS

PARAMETER	SYMBOL	TYP.	MAX.	UNIT
Maximum Junction-to-Ambient	R_{thJA}	-	65	$^{\circ}\text{C}/\text{W}$
Maximum Junction-to-Case (Drain)	R_{thJC}	-	2.69	

SPECIFICATIONS $T_J = 25 \text{ }^{\circ}\text{C}$, unless otherwise noted

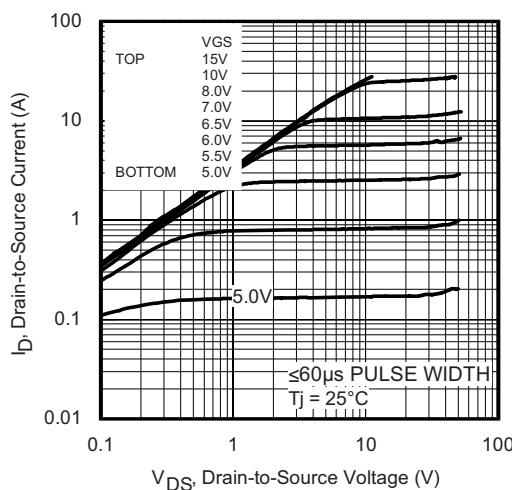
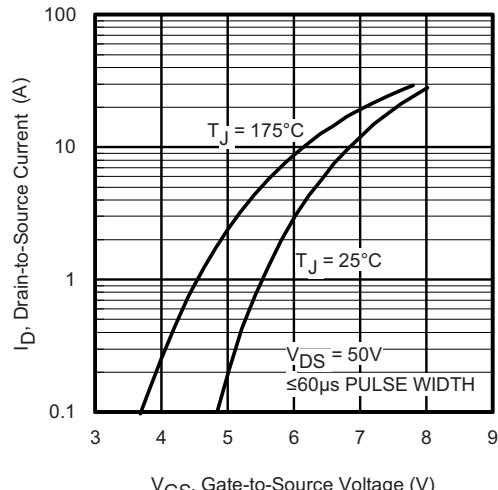
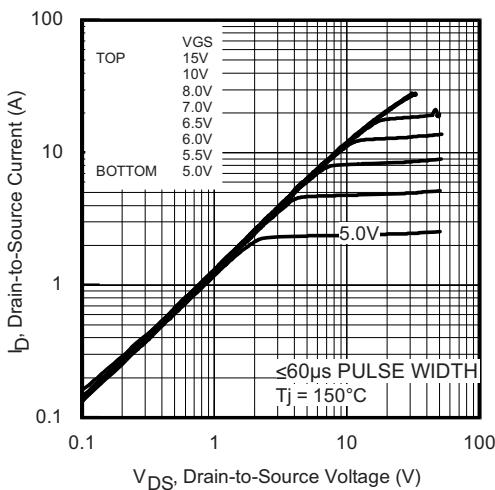
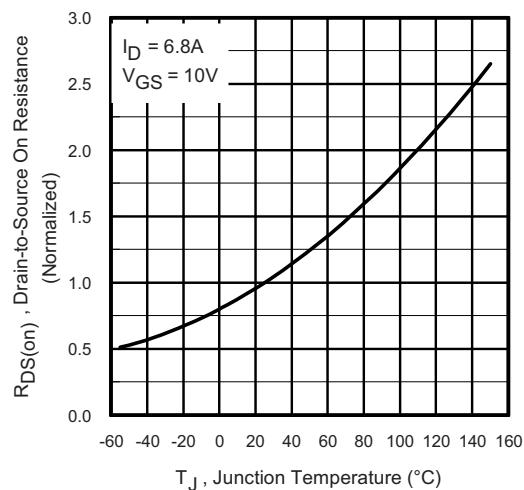
PARAMETER	SYMBOL	TEST CONDITIONS		MIN.	TYP.	MAX.	UNIT	
Static								
Drain-Source Breakdown Voltage	V_{DS}	$V_{GS} = 0 \text{ V}$, $I_D = 250 \mu\text{A}$		500	-	-	V	
V_{DS} Temperature Coefficient	$\Delta V_{DS}/T_J$	Reference to $25 \text{ }^{\circ}\text{C}$, $I_D = 1 \text{ mA}$		-	0.44	-	$\text{V}/^{\circ}\text{C}$	
Gate-Source Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}$, $I_D = 250 \mu\text{A}$		3.0	-	5.0	V	
Gate-Source Leakage	I_{GSS}	$V_{GS} = \pm 30 \text{ V}$		-	-	± 100	nA	
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = 500 \text{ V}$, $V_{GS} = 0 \text{ V}$		-	-	50	μA	
		$V_{DS} = 400 \text{ V}$, $V_{GS} = 0 \text{ V}$, $T_J = 125 \text{ }^{\circ}\text{C}$		-	-	2.0	mA	
Drain-Source On-State Resistance	$R_{DS(on)}$	$V_{GS} = 10 \text{ V}$	$I_D = 4.1 \text{ A}^b$	-	0.32	0.38	Ω	
Forward Transconductance	g_{fs}	$V_{DS} = 50 \text{ V}$, $I_D = 4.1 \text{ A}$		4.7	-	-	S	
Dynamic								
Input Capacitance	C_{iss}	$V_{GS} = 0 \text{ V}$, $V_{DS} = 25 \text{ V}$, $f = 1.0 \text{ MHz}$, see fig. 5		-	2220	-	pF	
Output Capacitance	C_{oss}			-	230	-		
Reverse Transfer Capacitance	C_{rss}			-	23	-		
Output Capacitance	C_{oss}	$V_{GS} = 0 \text{ V}$	$V_{DS} = 1.0 \text{ V}$, $f = 1.0 \text{ MHz}$	-	2780	-	pF	
			$V_{DS} = 400 \text{ V}$, $f = 1.0 \text{ MHz}$	-	63	-		
Effective Output Capacitance	$C_{oss eff.}$		$V_{DS} = 0 \text{ V to } 400 \text{ V}^c$	-	140	-		
Effective Output Capacitance (Energy Related)	$C_{oss eff. (ER)}$			-	100	-		
Total Gate Charge	Q_g	$V_{GS} = 10 \text{ V}$	$I_D = 6.8 \text{ A}$, $V_{DS} = 400 \text{ V}$, see fig. 7 and 16 ^b	-	-	92	nC	
Gate-Source Charge	Q_{gs}			-	-	24		
Gate-Drain Charge	Q_{gd}			-	-	44		
Internal Gate Resistance	R_G	$f = 1 \text{ MHz}$, open drain		-	0.88	-	Ω	
Turn-On Delay Time	$t_{d(on)}$	$V_{GS} = 10 \text{ V}$	$V_{DD} = 250 \text{ V}$, $I_D = 6.8 \text{ A}$, $R_G = 9.0 \Omega$, see fig. 11a and 11b ^b	-	23	-	ns	
Rise Time	t_r			-	36	-		
Turn-Off Delay Time	$t_{d(off)}$			-	47	-		
Fall Time	t_f			-	19	-		
Drain-Source Body Diode Characteristics								
Continuous Source-Drain Diode Current	I_S	MOSFET symbol showing the integral reverse p - n junction diode		-	-	6.8	A	
Pulsed Diode Forward Current ^a	I_{SM}			-	-	27		
Body Diode Voltage	V_{SD}	$T_J = 25 \text{ }^{\circ}\text{C}$, $I_S = 6.8 \text{ A}$, $V_{GS} = 0 \text{ V}^b$		-	-	1.5	V	
Body Diode Reverse Recovery Time	t_{rr}	$T_J = 25 \text{ }^{\circ}\text{C}$, $I_F = 6.8 \text{ A}$, $T_J = 125 \text{ }^{\circ}\text{C}$, $dI/dt = 100 \text{ A}/\mu\text{s}^b$		-	85	130	ns	
		$T_J = 25 \text{ }^{\circ}\text{C}$, $I_S = 6.8 \text{ A}$, $T_J = 125 \text{ }^{\circ}\text{C}$, $dI/dt = 100 \text{ A}/\mu\text{s}^b$		-	130	200		
Body Diode Reverse Recovery Charge	Q_{rr}	$T_J = 25 \text{ }^{\circ}\text{C}$, $I_S = 6.8 \text{ A}$, $T_J = 125 \text{ }^{\circ}\text{C}$, $dI/dt = 100 \text{ A}/\mu\text{s}^b$		-	280	420	nC	
		$T_J = 25 \text{ }^{\circ}\text{C}$, $I_S = 6.8 \text{ A}$, $T_J = 125 \text{ }^{\circ}\text{C}$, $dI/dt = 100 \text{ A}/\mu\text{s}^b$		-	570	860		

SPECIFICATIONS $T_J = 25^\circ\text{C}$, unless otherwise noted

PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Drain-Source Body Diode Characteristics						
Body Diode Reverse Recovery Current	I_{RRM}	$T_J = 25^\circ\text{C}$	-	5.9	8.9	A
Forward Turn-On Time	t_{on}	Intrinsic turn-on time is negligible (turn-on is dominated by L_S and L_D)				

Notes

- a. Repetitive rating; pulse width limited by maximum junction temperature (see fig. 12).
- b. Pulse width $\leq 300 \mu\text{s}$; duty cycle $\leq 2\%$.
- c. C_{oss} eff. is a fixed capacitance that gives the same charging time as C_{oss} while V_{DS} is rising from 0 to 80 % V_{DS} .
 C_{oss} eff. (ER) is a fixed capacitance that stores the same energy as C_{oss} while V_{DS} is rising from 0 to 80 % V_{DS} .

TYPICAL CHARACTERISTICS 25°C , unless otherwise noted

Fig. 1 - Typical Output Characteristics

Fig. 3 - Typical Transfer Characteristics

Fig. 2 - Typical Output Characteristics

Fig. 4 - Normalized On-Resistance vs. Temperature

IRFIB7N50L, SiHFIB7N50L

Vishay Siliconix

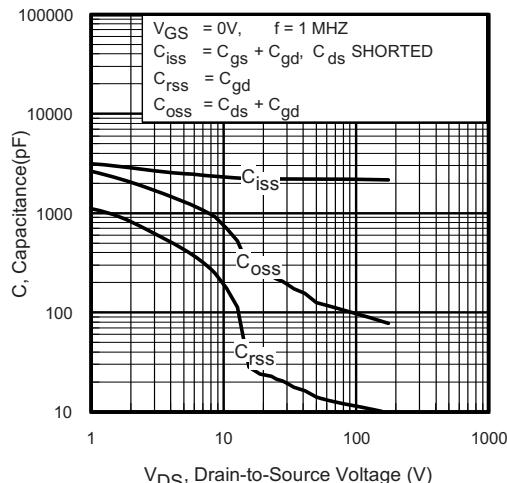


Fig. 5 - Typical Capacitance vs. Drain-to-Source Voltage

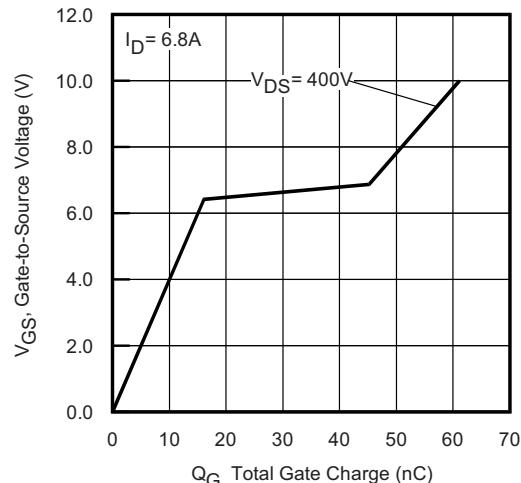


Fig. 7 - Typical Gate Charge vs. Gate-to-Source Voltage

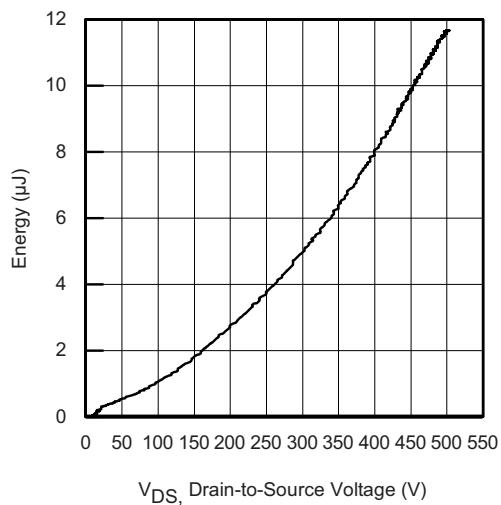


Fig. 6 - Typical Output Capacitance Stored Energy vs. V_{DS}

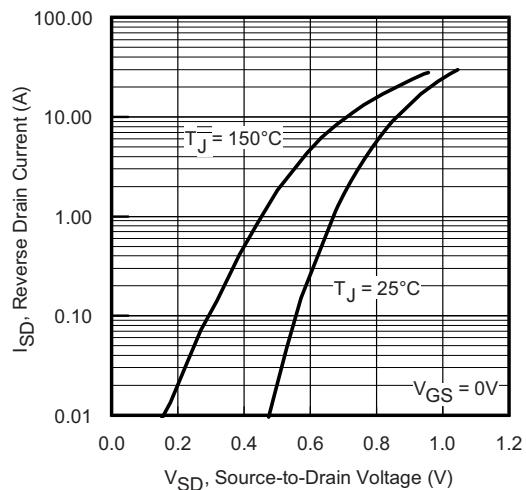
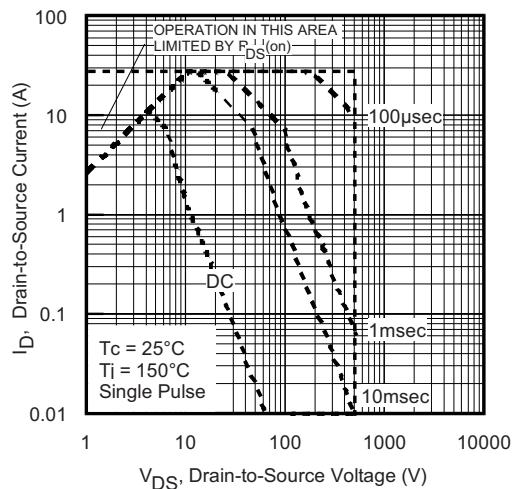
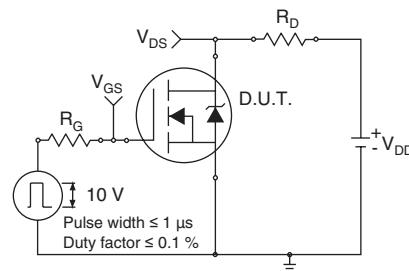
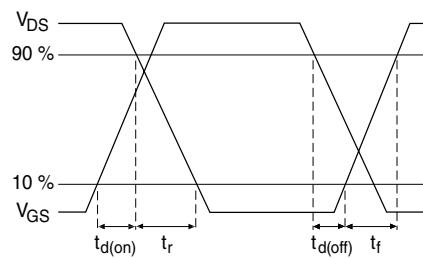
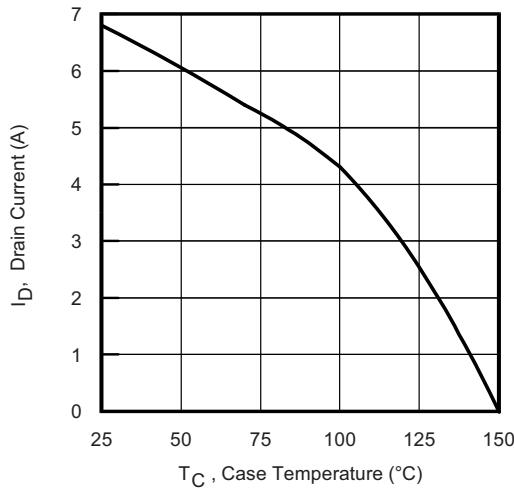


Fig. 8 - Typical Source-Drain Diode Forward Voltage


Fig. 9 - Maximum Safe Operating Area

Fig. 11a - Switching Time Test Circuit

Fig. 11b - Switching Time Waveforms

Fig. 10 - Maximum Drain Current vs. Case Temperature

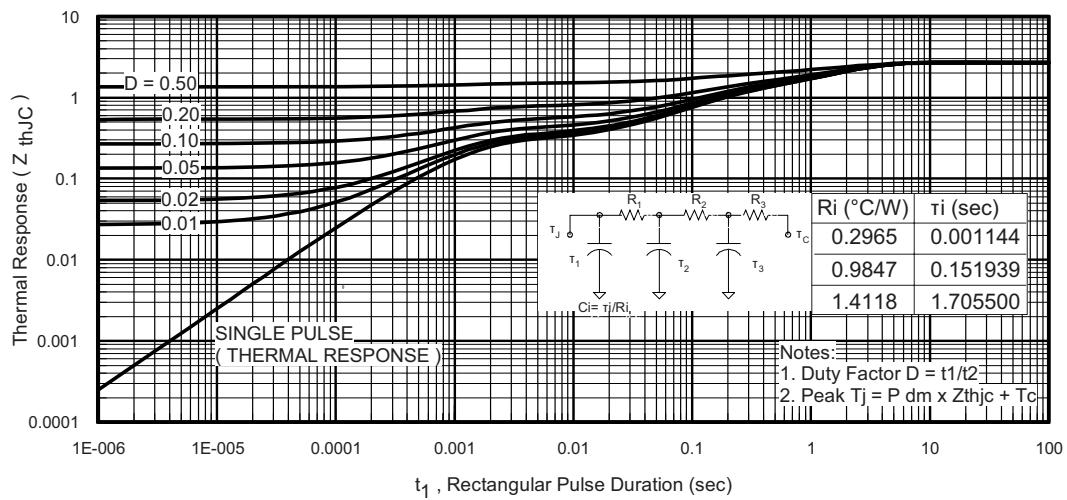


Fig. 12 - Maximum Effective Transient Thermal Impedance, Junction-to-Case

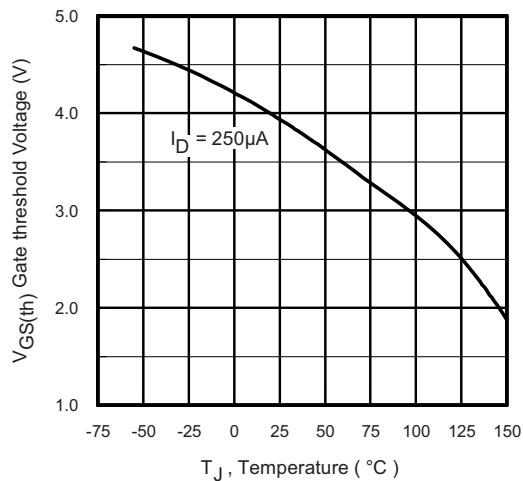


Fig. 13 - Threshold Voltage vs. Temperature

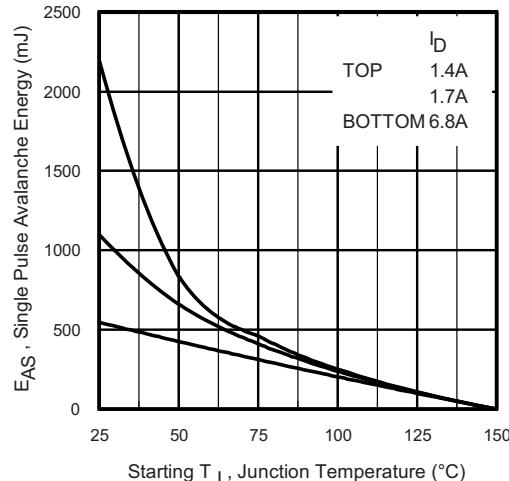


Fig. 14 - Maximum Avalanche Energy vs. Drain Current

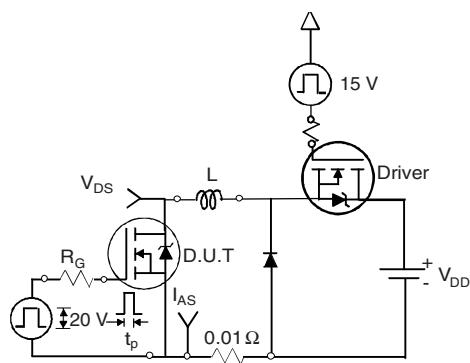


Fig. 15a - Unclamped Inductive Test Circuit

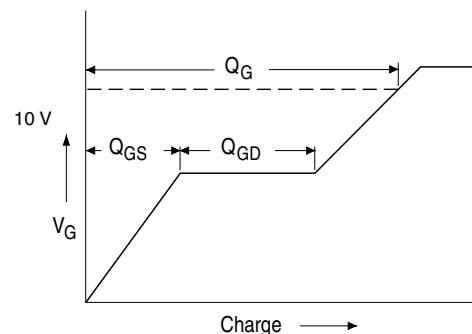


Fig. 16a - Basic Gate Charge Waveform

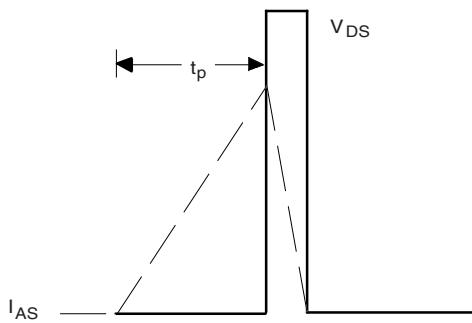


Fig. 15b - Unclamped Inductive Waveforms

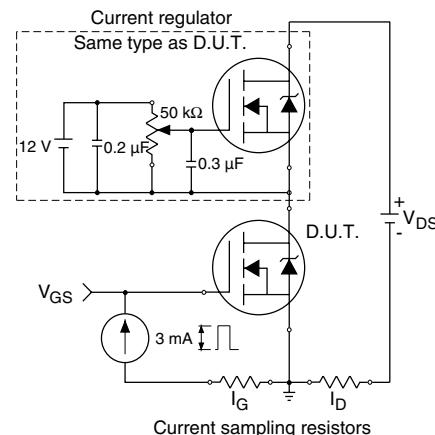
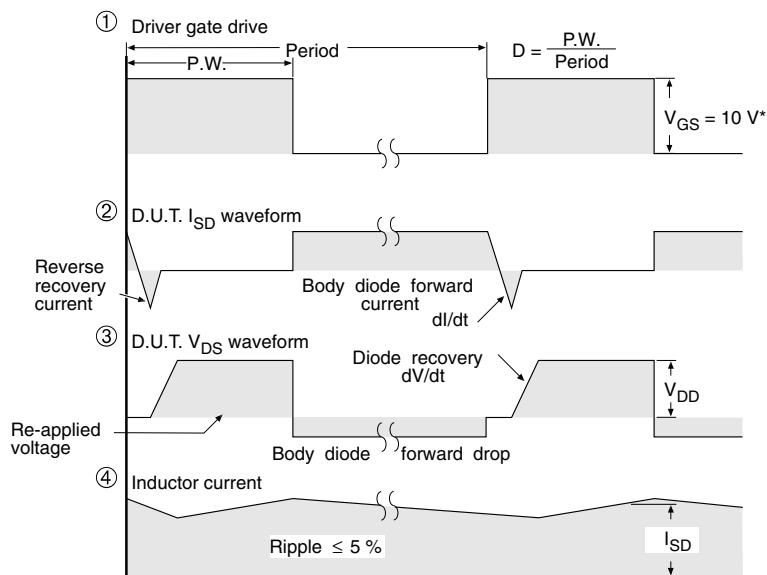
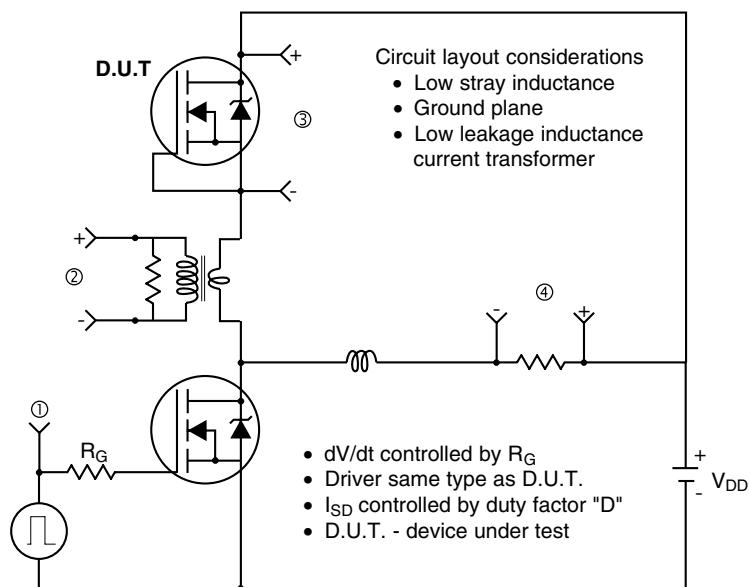


Fig. 16b - Gate Charge Test Circuit

Peak Diode Recovery dV/dt Test Circuit



* $V_{GS} = 5 \text{ V}$ for logic level devices

Fig. 17 - For N-Channel

Vishay Siliconix maintains worldwide manufacturing capability. Products may be manufactured at one of several qualified locations. Reliability data for Silicon Technology and Package Reliability represent a composite of all qualified locations. For related documents such as package/tape drawings, part marking, and reliability data, see <http://www.vishay.com/ppg?91177>.



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.