

FEATURES

- * 0.764 inch (19.4-mm) DIGIT HEIGHT.
- * CONTINUOUS UNIFORM SEGMENTS.
- * LOW POWER REQUIREMENTS.
- * EXCELLENT CHARACTERS AND APPEARANCE.
- * HIGH CONTRAST.
- * HIGH BRIGHTNESS.
- * WIDE VIEWING ANGLE.
- * SOLID STATE RELIABI
- * CATEGORIZED FOR LUMINOUS INTENSITY.


DESCRIPTION

The LTP-7188E is a 0.764 inch (19.4 mm) height 8x8 dot matrix display. This device utilizes red orange LED chips, which are made from GaAsP on a transparent GaP substrate, and has a gray face and white dot.

DEVICE


| PART NO. | DESCRIPTION |
|-----------------|------------------------------|
| RED ORANGE | ANODE ROW, CATHODE COLUMN |
| LTP-7188E | |

PACKAGE DIMENSIONS

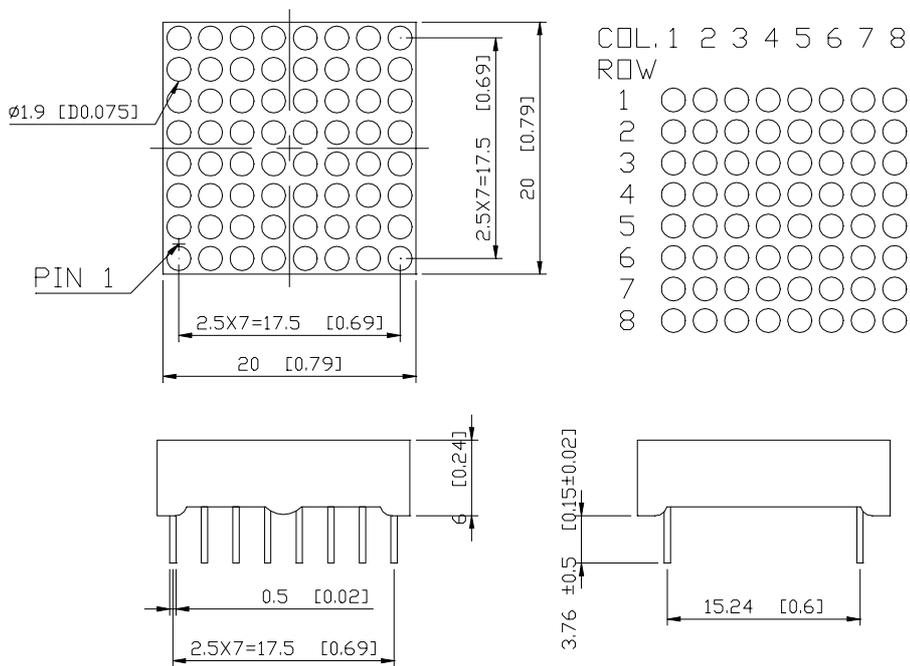

NOTES: All dimensions are in millimeters. Tolerances are ± 0.25 mm (0.01") unless otherwise noted.

INTERNAL CIRCUIT DIAGRAM

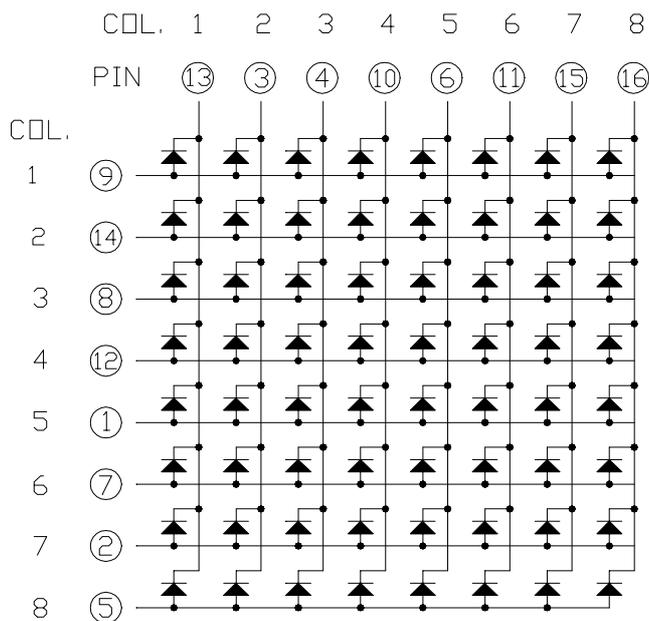

PIN CONNECTION

| No. | CONNECTION |
|------------|-------------------|
| 1 | ANODE ROW 5 |
| 2 | ANODE ROW 7 |
| 3 | CATHODE COLUMN 2 |
| 4 | CATHODE COLUMN 3 |
| 5 | ANODE ROW 8 |
| 6 | CATHODE COLUMN 5 |
| 7 | ANODE ROW 6 |
| 8 | ANODE ROW 3 |
| 9 | ANODE ROW 1 |
| 10 | CATHODE COLUMN 4 |
| 11 | CATHODE COLUMN 6 |
| 12 | ANODE ROW 4 |
| 13 | CATHODE COLUMN 1 |
| 14 | ANODE ROW 2 |
| 15 | CATHODE COLUMN 7 |
| 16 | CATHODE COLUMN 8 |

ABSOLUTE MAXIMUM RATING AT Ta=25°C

| PARAMETER | MAXIMUM RATING | UNIT |
|--|----------------|-------|
| Average Power Dissipation Per Dot | 32 | mW |
| Peak Forward Current Per Dot | 90 | mA |
| Average Forward Current Per Dot | 11 | mA |
| Derating Linear From 25°C Per Dot | 0.15 | mA/°C |
| Reverse Voltage Per Dot | 5 | V |
| Operating Temperature Range | -35°C to +85°C | |
| Storage Temperature Range | -35°C to +85°C | |
| Solder Temperature: max 260°C for max 3sec at 1.6mm[1/16inch] below seating plane. | | |

ELECTRICAL / OPTICAL CHARACTERISTICS AT Ta=25°C

| PARAMETER | SYMBOL | MIN. | TYP. | MAX. | UNIT | TEST CONDITION |
|-----------------------------------|-------------------|------|------|------|------|--------------------------------|
| Average Luminous Intensity | I _v | 630 | 2000 | | μcd | I _p =80mA, 1/16Duty |
| Peak Emission Wavelength | λ _p | | 630 | | nm | I _F =20mA |
| Spectral Line Half-Width | Δλ | | 40 | | nm | I _F =20mA |
| Dominant Wavelength | λ _d | | 621 | | nm | I _F =20mA |
| Forward Voltage Per Dot | V _F | | 2.0 | 2.6 | V | I _F =20mA |
| | | | 2.6 | 3.4 | V | I _F =80mA |
| Reverse Current Per Dot | I _R | | | 100 | μA | V _R =5V |
| Luminous Intensity Matching Ratio | I _v -m | | | 2:1 | | I _p =80mA, 1/16Duty |

Note: Luminous intensity is measured with a light sensor and filter combination that approximates the CIE (Commision Internationale De L'Eclairage) eye-response curve.

TYPICAL ELECTRICAL / OPTICAL CHARACTERISTIC CURVES

(25°C Ambient Temperature Unless Otherwise Noted)

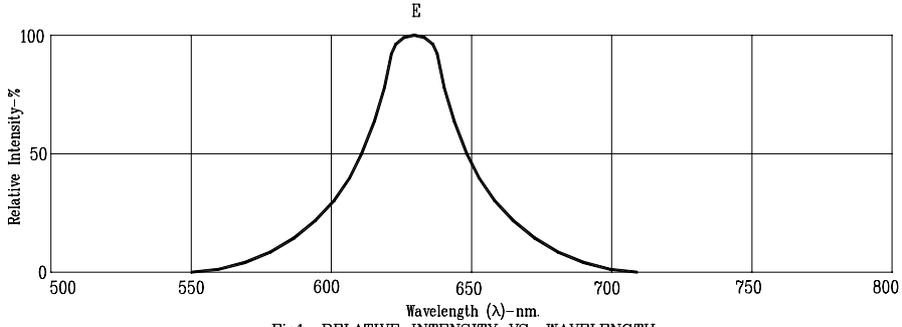


Fig1. RELATIVE INTENSITY VS. WAVELENGTH




Fig2. RELATIVE LUMINOUS EFFICIENCY (LUMINOUS INTENSITY PER UNIT CURRENT) VS. PEAK CURRENT (REFRESH RATE 1KHz)




Fig3. FORWARD CURRENT VS. FORWARD VOLTAGE




Fig4. RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT




Fig5. MAX. AVERAGE FORWARD CURRENT VS. AMBIENT TEMPERATURE.




Fig6. MAX. PEAK CURRENT VS. DUTY CYCLE % (REFRESH RATE 1KHz)

NOTE: E=RED ORANGE