


SPECIFICATION FOR APPROVAL

REF :

PAGE: 1


PROD. NAME	RADIAL INDUCTOR	ABC'S DWG NO.	RH0912□□□□L□-□□□
		ABC'S ITEM NO.	

. CONFIGURATION & DIMENSIONS :

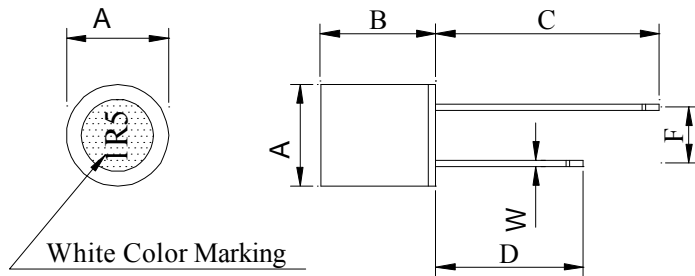


A	:	9.3±0.3	m/m
B	:	11.8±0.3	m/m
C	:	25.0±5	m/m
D	:	18.0±5	m/m
F	:	5.0±0.3	m/m
W	:	0.65±0.05	m/m

. SCHEMATIC DIAGRAM :



. MATERIALS :

- a . Core : Ferrite DR core
- b . Wire : Enamelled copper wire (class F)
- c . Housing : PBT-4130 UL94V-0
- d . Adhesive : Epoxy resin
- e . Remark : Products comply with RoHS' requirements



. GENERAL SPECIFICATION :

- a . Temp. rise : 20 max. at rated current.
- b . Storage temp. : -25 ---- +85
- c . Operating temp. : -20 ---- +80

SPECIFICATION FOR APPROVAL

REF :

PAGE: 2

PROD. NAME	RADIAL INDUCTOR	ABC'S DWG NO.	RH0912□□□□L□-□□□
		ABC'S ITEM NO.	

. ELECTRICAL CHARACTERISTICS :

DWG No.	Inductance (μ H)	Q ref.	Test Freq. (Hz)		SRF (MHz) typ.	RDC (Ω) max.	IDC (A) max.
			L	Q			
RH09121R5ML□-□□□	1.5 \pm 20%	30	1K	7.960M	78.0	0.008	5.40
RH09122R2ML□-□□□	2.2 \pm 20%	30	1K	7.960M	63.0	0.010	4.50
RH09123R3ML□-□□□	3.3 \pm 20%	30	1K	7.960M	50.0	0.018	3.60
RH09124R7ML□-□□□	4.7 \pm 20%	30	1K	7.960M	41.0	0.022	3.10
RH09126R8ML□-□□□	6.8 \pm 20%	30	1K	7.960M	33.0	0.028	2.50
RH0912100KL□-□□□	10.0 \pm 10%	60	1K	2.520M	27.0	0.043	2.10
RH0912150KL□-□□□	15.0 \pm 10%	50	1K	2.520M	21.0	0.056	1.70
RH0912220KL□-□□□	22.0 \pm 10%	50	1K	2.520M	17.0	0.086	1.40
RH0912330KL□-□□□	33.0 \pm 10%	45	1K	2.520M	13.0	0.140	1.10
RH0912470KL□-□□□	47.0 \pm 10%	40	1K	2.520M	11.0	0.170	0.96
RH0912680KL□-□□□	68.0 \pm 10%	35	1K	2.520M	9.0	0.280	0.79
RH0912101KL□-□□□	100.0 \pm 10%	55	1K	0.796M	7.2	0.330	0.66
RH0912151KL□-□□□	150.0 \pm 10%	40	1K	0.796M	5.7	0.560	0.53
RH0912221KL□-□□□	220.0 \pm 10%	30	1K	0.796M	4.5	0.720	0.44
RH0912331KL□-□□□	330.0 \pm 10%	25	1K	0.796M	3.6	1.100	0.36
RH0912471KL□-□□□	470.0 \pm 10%	25	1K	0.796M	2.9	1.700	0.30
RH0912681KL□-□□□	680.0 \pm 10%	25	1K	0.796M	2.3	2.300	0.25
RH0912102KL□-□□□	1000.0 \pm 10%	55	1K	0.252M	1.9	4.300	0.20

1). □ : Package information ... A : Bulk B : Taping / Reel

2). "□□□":Reference code


SPECIFICATION FOR APPROVAL

REF :

PAGE: 3

PROD. NAME	RADIAL INDUCTOR	ABC'S DWG NO.	RH0912□□□□L□-□□□
		ABC'S ITEM NO.	

TYPED PACKAGE DIMENSIONS :

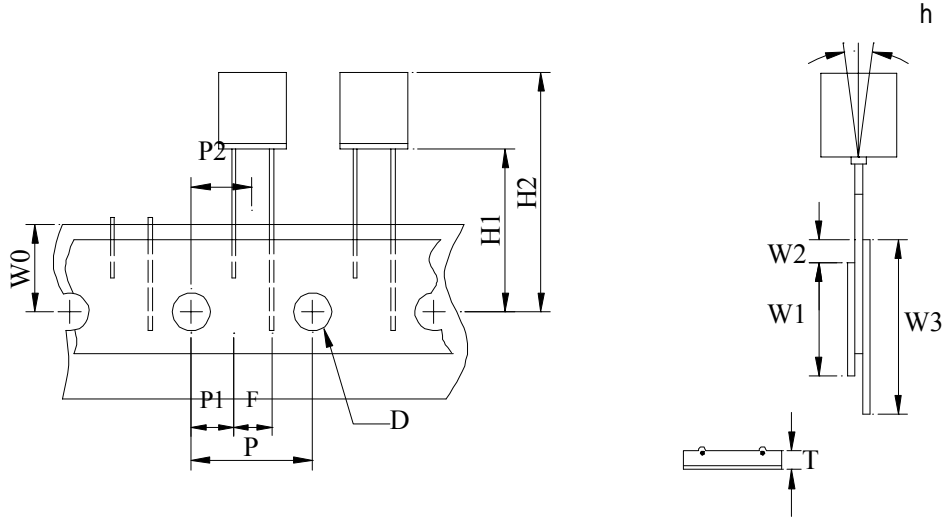

Item	Symbol	Specification			
		Milimeter		Inch	
		Size	Tolerance	Size	Tolerance
Tape feed hole diameter	D	4.00	±0.20	0.157	±0.008
Component lead pitch	F	5.00	±0.50	0.200	±0.020
Front-to-rear delectton	h	2.00	max.	0.079	max.
Feed hole to bottom of component	H1	18.50	±0.80	0.728	±0.040
Feed hold to overall component height	H2	30.30	±1.00	1.083	±0.040
Feed hole pitch	P	12.70	±0.30	0.500	±0.012
Lead location	P1	3.85	±0.70	0.152	±0.028
Center of component location	P2	6.35	±1.30	0.250	±0.051
Overall taped package thinkness	T	1.42	max.	0.056	max.
Feed hole location	W0	9.00	±0.50	0.354	±0.020
Adhesive tape width	W1	15.00	±0.50	0.598	±0.020
Adhesive tape position	W2	4.00	max.	0.157	max.
Tape wide	W3	18.00	±0.50	0.709	±0.020

AR-001A

SPECIFICATION FOR APPROVAL

REF :

PAGE: 4


PROD. NAME	RADIAL INDUCTOR	ABC'S DWG NO.	RH0912□□□□L□-□□□
		ABC'S ITEM NO.	

PACKAGING NO. : B


REEL : 500 PCS

PACKAGING INFORMATION :


1、 INTERNAL PACKAGING : 500PCS / R

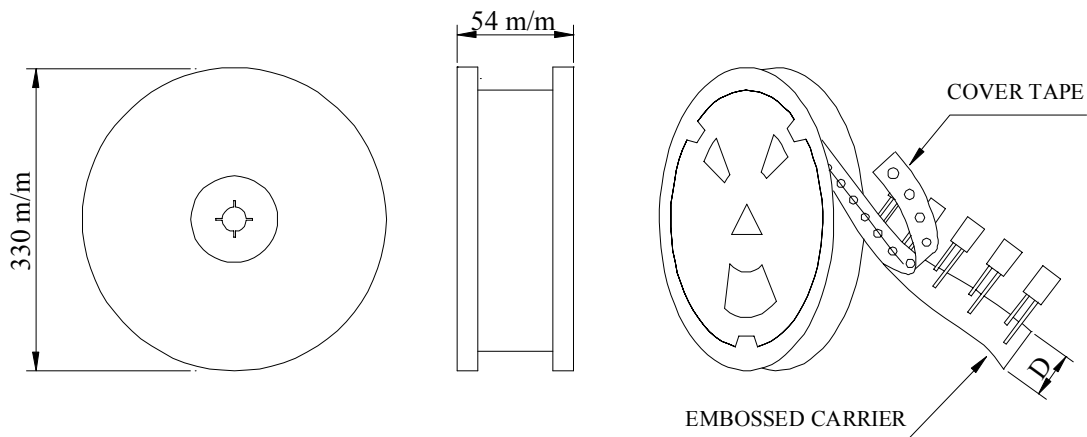

2、 MIDDLE PACKAGING : 1 R / BOX

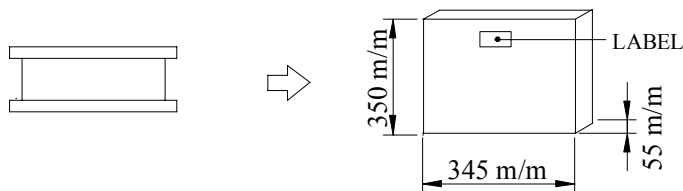

3、 EXTERNAL PACKAGING : 6 BOX / CARTON

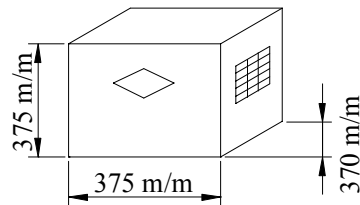

Q'TY & G.W.PER PACKAGEING :

DWG NO.	INNER : REEL			OUTER : CARTON		
	Q'TY(PCS)	G.W.(gw)	STYLE (m/m)	Q'TY(PCS)	G.W.(Kg)	SIZE (cm)
RH0912	500	1100	13-54	3000	7.20	37.5x37.0x37.5

AR-001A


SPECIFICATION FOR APPROVAL

REF :

PAGE: 5

PROD. NAME	RADIAL INDUCTOR	ABC'S DWG NO.	RH0912□□□□L□-□□□
		ABC'S ITEM NO.	

. DWGING NUMBER EXPRESSION :

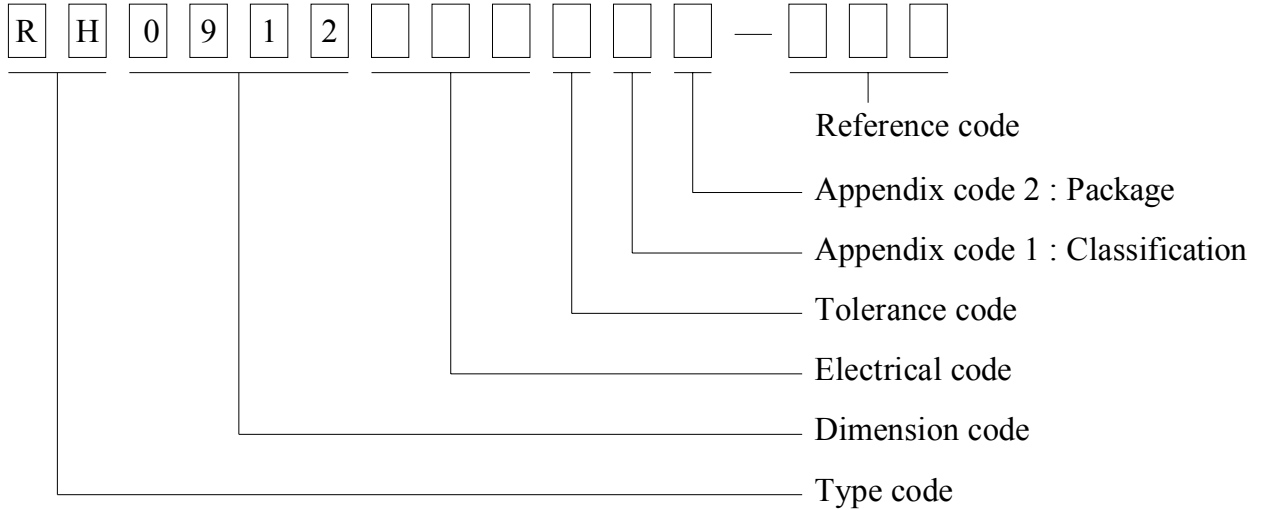

Appendix code 1 : Product Classification

L : Lead Free Standard products comply with RoHS' requirements

1 ~ 9 : Lead Free Special products comply with RoHS' requirements

Appendix code 2 : Package Information

Code	Inner package	Inner package Q'TY	Remark
A	T.B.D.	T.B.D.	
B	T / R (Reel package)	500 pcs	
C	Bag	200 pcs	
D	T / B (Box package)	1000 pcs	

SPECIFICATION FOR APPROVAL

REF :

PAGE: 6

PROD. NAME	RADIAL INDUCTOR	ABC'S DWG NO.	RH0912□□□□L□-□□□
		ABC'S ITEM NO.	

UL CARD :

OBMW2
September 8, 2000

Magnet Wire-Component

JUNG SHING WIRE CO LTD
E174837

231 CHUNG CHENG RD, SEC 3 JEN-TEH HSIANG, TAINAN
HSIEN TAIWAN

Mtl Dsg	Mark Dsg	BC	Coat Typ	OC	ANSI Type	Temp Class
AIW	---	Polyamideimide	---	---	MW81-C	220
CFUEWB	---	Polyurethane	---	---	MW75C	130
EIAIW	---	Polyesterimide	Polyamideimide	---	MW35C	200
EILOCKY	---	Polyesterimide	Polyamide	---	---	180
EILOCKW	---	Polyesterimide	Modified Epoxy	---	---	200
EIW	---	Polyesterimide	---	---	---	220
EIW-2	---	Polyesterimide	---	---	MW74-C	200
FL.EILOCKY	---	Modified Polyester	Polyamide	---	---	155
LSFFW	---	Polyurethane	---	---	MW79-C	155
LSUEW	---	Polyurethane	---	---	---	130
PEW	---	Polyester	---	---	---	155
PEY	---	Polyester	Nylon	---	MW24-C	155
SF.FLW	---	Modified Polyester	---	---	MW26C	155
SF.EIW	---	Polyesterimide	---	---	MW77C	180
SF.BY@	---	Modified Polyester	Nylon	---	MW27-C	155
SF.FLY@	---	Modified Polyester	Nylon	---	MW27-C	155
SF.BLOCKBS	---	Modified Polyester	Modified Polyamide	---	---	155
SF.EILOCKY#	---	Polyesterimide	Polyamide	---	---	180
SF.EILOCKBS	---	Polyesterimide	Modified Polyamide	---	---	180
SF.BW@	---	Modified Polyester	---	---	MW26C	155
SFFW	---	Polyurethane	---	---	MW79	155

287806002 Page 1 of 2

Mtl Dsg	Mark Dsg	BC	Coat Typ	OC	ANSI Type	Temp Class
SFFY	---	Polyurethane	Polyamide	---	MW80C	155
UEW-1	---	Polyurethane	---	---	MW2-C	105
UEW-2	---	Polyurethane	---	---	---	130
UEW-4	---	Polyurethane	---	---	MW75C	130
UEY	---	Polyurethane	Nylon	---	MW28-C	130
UEY-2	---	Polyurethane	Polyamide	---	MW28-C	130

@-May be suffixed by LZ; # - May be suffixed by LZ, EL or LZL.
LZ - Signifies magened wires twisted together; EL - signifies base coated magnet wire laid parallel with top coat applied overall; LZL - signifies base coated magnet wire twisted together and covered with top coat overall.

Marking: Company name or trademarks JSW or 榮星電線, material designation or marked designation on packaed or reel, and Recognized Component Mark.

See General Information Preceding These Recognitions
For use only in equipment where the acceptability of the combination is determined by Underwriters Laboratories Inc.

287806002
Page 2 of 2
OBMW2E174837
September 8, 2000

AR-001A

