

2W005M THRU 2W10M

SINGLE-PHASE SILICON BRIDGE RECTIFIERS

Reverse Voltage – 50 to 1000 Volts



Forward Current – 2.0 Amperes

Features

- Surge overload ratings to 50 amperes peak
- Ideal for printed circuit board
- Reliable low cost construction technique results in inexpensive product
- High temperature soldering guaranteed:
250°C/10 seconds/0.375" (9.5mm) lead length at 5 lbs., (2.3kg) tension.

Mechanical Data

- **Case:** Molded plastic
- **Lead:** Solder plated
- **Polarity:** As marked

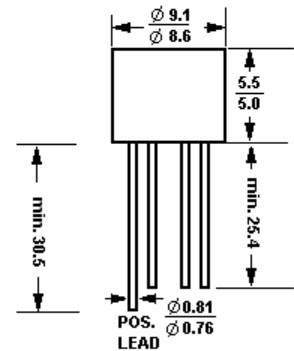


Dimensions in mm

Absolute Maximum Ratings and Characteristics

Rating at 25°C ambient temperature unless otherwise specified. Single-phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

	Symbols	2W 005M	2W 01M	2W 02M	2W 04M	2W 06M	2W 08M	2W 10M	Units
Maximum recurrent peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified current at $T_A = 50^\circ C$	$I_{(AV)}$	2							A
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	50							A
Maximum instantaneous forward voltage @ 2A	V_F	1.1							V
Maximum DC reverse current @ $T_A = 25^\circ C$	I_R	10							μA
Maximum DC reverse current at rated DC blocking voltage @ $T_A = 100^\circ C$	I_R	500							μA
Typical thermal resistance(Note 1)	$R_{\theta JA}$	40							$^\circ C/W$
	$R_{\theta JL}$	15							$^\circ C/W$
Operating temperature range	T_J	-55 to +125							$^\circ C$
Storage temperature range	T_S	-55 to +150							$^\circ C$

Note: (1) Thermal resistance from junction to ambient and from junction to lead at 0.375" (9.5mm) lead length for P.C.B. mounting.



SEMTECH ELECTRONICS LTD.

(Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO/TS 16949 : 2002
Certificate No. 05103



ISO 14001:2004
Certificate No. 7116



ISO 9001:2000
Certificate No. 0506098

Dated : 26/09/2003

RATINGS AND CHARACTERISTIC CURVES

FIG. 1-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER BRIDGE ELEMENT

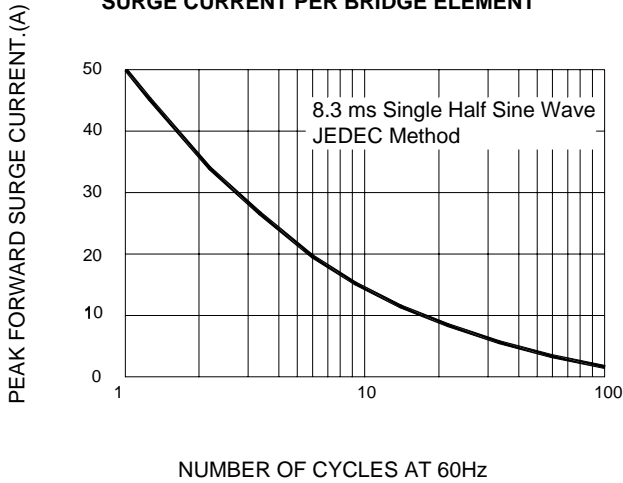


FIG. 2-MAXIMUM CURRENT DERATING CURVE OUTPUT RECTIFIED CURRENT

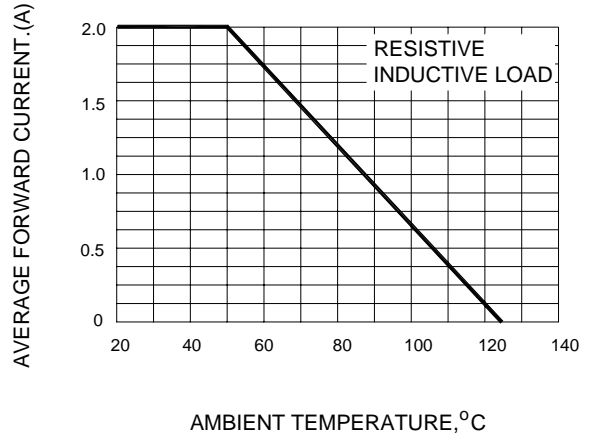


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER BRIDGE ELEMENT




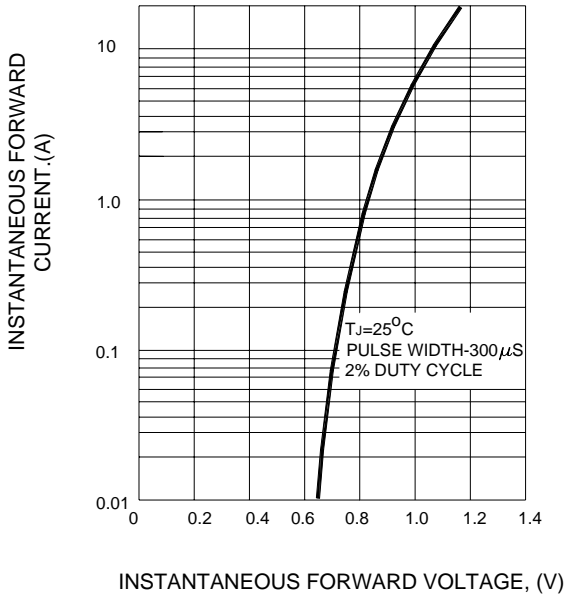


FIG. 4-TYPICAL REVERSE CHARACTERISTICS PER BRIDGE ELEMENT

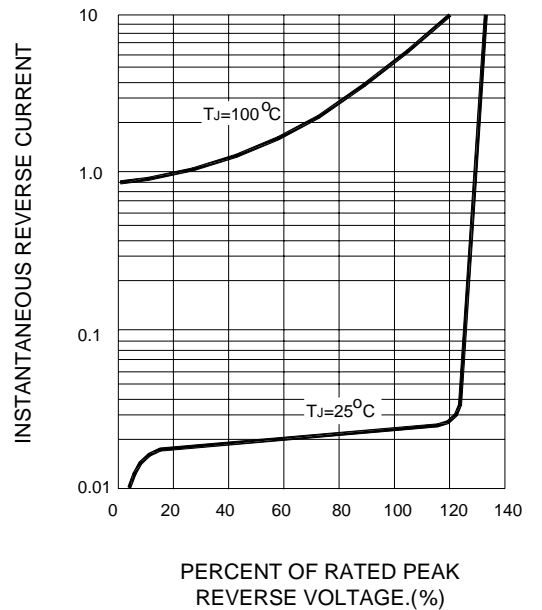

SEMTECH ELECTRONICS LTD.

(Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO/TS 16949 : 2002
Certificate No. 05103

ISO 14001:2004
Certificate No. 71116

ISO 9001:2000
Certificate No. 0506098

Dated : 26/09/2003