



715-7060 - 2412F


SERIES 2 Imperial Dial Test Indicators

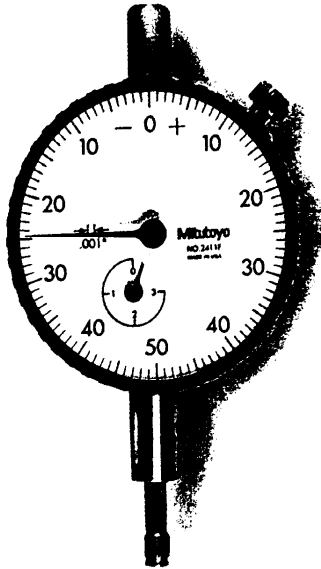

2411F

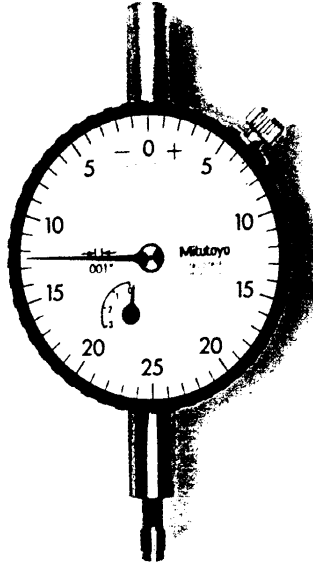

2781F

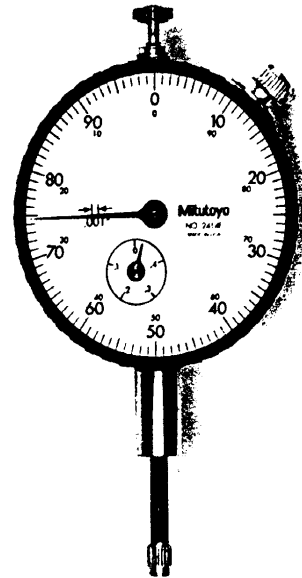


2414F

Measurement applications

Conventional size and shape of indicator for most

Features

- ✓ Mitutoyo's most popular size Dial Test Indicator
- ✓ Wide range of options available
- ✓ Imperial models

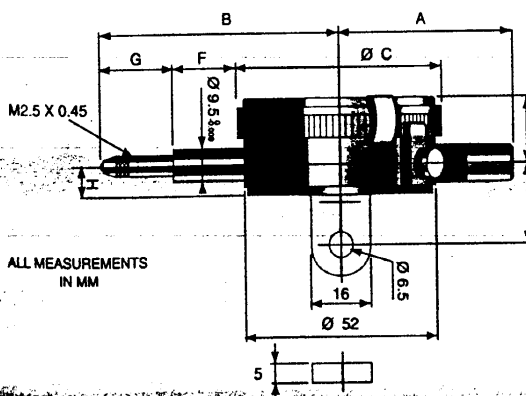

ALL MEASUREMENTS
IN MM

No.	A	B	C	D	E	F	G	H	No.	A	B	C	D	E	F	G	H
2945-40	46	59	58	18	19	14	16	9	2413F	37	62	55.6	16	19	15	19	8
2780-08	46	55	58	15	19	15	11.5	8	2414F	37	65	55.6	15	19	15	22	8
2781-08	45	55	58	15	19	15	11.5	8	2414F-10	37	65	55.6	15	19	15	22	8
2410F	48	58	55.6	16	19	15	15	8	2415F	37	65	55.6	15	19	15	22	8
2410F-10	48	58	55.6	16	19	15	15	8	2415F-10	37	65	55.6	15	19	15	22	8
2411F-10	48	58	55.6	16	19	15	15	8	2416F	37	78	55.6	16	19	15	35	8
2411F	48	58	55.6	16	19	15	15	8	2416F-10	37	78	55.6	16	19	15	35	8
2412F	37	62	55.6	16	19	15	19	8	2417F	37	78	55.6	16	19	16	56.8	8
2413F	37	62	55.6	16	19	15	19	8	2424F-10	12	139	58	15	19	16	11	8

Series 2 Imperial models R/C=Revolution Counter, J=Jewelled, LH=Limit Hands, L/MF=Low Measuring Force, * =Stroke

GRADUATION	RANGE	READING	ACCURACY	NO.	RANGE/REV.	MEAS. FORCE	REMARKS
0.001"	0.08"	40-0-40	±0.001"	2945-40	0.1"	1.4N	L/H, J*0.3"
0.001"	0.125"	0-50	±0.001"	2780-08	0.05"	1.5N	R/C
0.001"	0.125"	0-25-0	±0.001"	2781F	0.05"	1.5N	R/C
0.001"	0.25"	0-100	±0.001"	2410F	0.1"	1.5N	R/C
0.001"	0.25"	0-100	±0.001"	2410F-10	0.1"	1.5N	R/C, J
0.001"	0.25"	0-50-0	±0.001"	2411F	0.1"	1.5N	R/C
0.001"	0.25"	0-50-0	±0.001"	2411F-10	0.1"	1.5N	R/C, J
0.001"	0.4"	0-100	±0.001"	2412F	* 0.1"	1.5N	R/C
0.001"	0.4"	0-50-0	±0.001"	2413F	0.1"	1.5N	R/C
0.001"	0.5"	0-100	±0.001"	2414F	0.1"	1.5N	R/C
0.001"	0.5"	0-100	±0.001"	2414F-10	0.1"	1.5N	R/C, J
0.001"	0.5"	0-50-0	±0.001"	2415F	0.1"	1.5N	R/C
0.001"	0.5"	0-50-0	±0.001"	2415F-10	0.1"	1.5N	R/C, J
0.001"	1"	0-100	±0.002"	2416F	0.1"	2.0N	R/C
0.001"	1"	0-100	±0.002"	2416F-10	0.1"	2.0N	R/C, J

SERIE

Measure
Conventio
General at

4-48U

ALL ME

Series 2 Impe

GRADUATI

0.0001"
0.0001"
0.0001"
0.0001"
0.0001"
0.0001"
0.0001"
0.0001"
0.0001"
0.0001"
0.00025"
0.00025"
0.0005"
0.0005"