

539-909 → 960

539 - 958

bel**Type 3AG/3AP Normal Blow
Glass Tube Fuse Series****Electrical Characteristics**

Rating	Blow Time
110%	4 hours, minimum
135%	1 hour, maximum
200%	5 seconds, maximum

Mechanical Dimensions

	3AG		3AP		Pigtail Leads	
Dimensions	Inches	(mm)	Inches	(mm)	Inches	(mm)
Diameter	0.250	(6.35)	0.270	(6.9)	0.032	(0.813)
Length	1.25	(31.8)	1.28	(32.5)	1.5	(38.1)

Listed by Underwriters' Laboratories and
Certified by Canadian Standards
Association through 15 Amperes.


Type 3AG fuses, described as normal blow,
are medium to quick acting protectors for
use in general circuit applications. Suitable
for most circuits where high surges or
transients are not anticipated. Pigtail
leads (Type 3AP) are available when direct
soldering into circuits is desirable.

Cartridge fuses can be provided
pre-assembled in clips, see page 40.

Pigtail fuses can be provided:

1. In Bulk.
2. On Axial Tape & Reel.
3. Radial Formed and Cut.
4. With Heat Shrink Tubing over body.

See Page 41 for details.

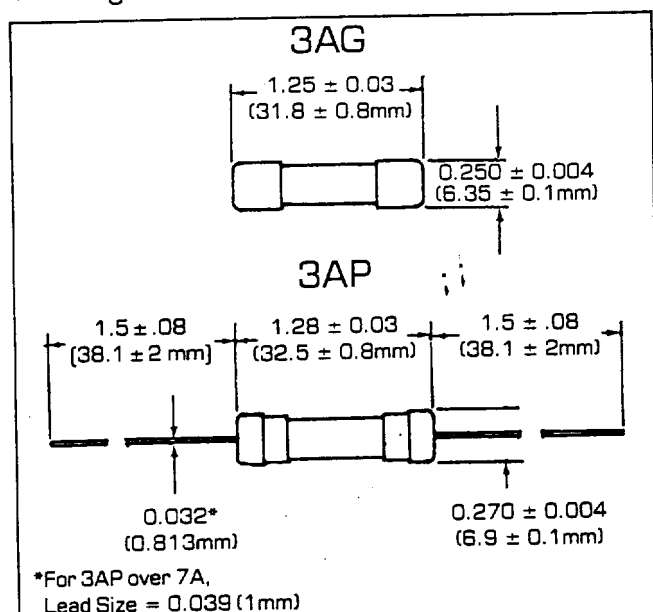

*For 3AP over 7A,
Lead Size = 0.039 (1mm)

Specifications Subject To Change Without Notice

Catalog Number	Ampere Rating	Voltage Rating
3AG100	1/10	250
3AG125	1/8	250
3AG150	15/100	250
3AG175	.175	250
3AG187	3/16	250
3AG200	2/10	250
3AG250	1/4	250
3AG300	3/10	250
3AG375	3/8	250
3AG400	4/10	250
3AG500	1/2	250
3AG600	6/10	250
3AG750	3/4	250
3AG800	8/10	250
3AG1	1	250
3AG1.25	1-1/4	250
3AG1.5	1-1/2	250
3AG1.6	1-6/10	250
3AG1.75	1-3/4	250
3AG2	2	250
3AG2.3	2-3/10	250
3AG2.5	2-1/2	250
3AG3	3	250
3AG3.5	3-1/2	250
3AG4	4	250
3AG4.5	4-1/2	250
3AG5	5	250
3AG6	6	250
3AG7	7	250
3AG8	8	250
3AG10	10	250
3AG12	12	125
3AG15	15	125

Fuse Markings


"BEL," Current & Voltage Ratings

bel Bel Fuse Inc.

198 Van Vorst Street, Jersey City, New Jersey 07302 • (201) 432-0463 • FAX (201) 432-9542

Bel 3AG/3AP

Time-Current Characteristics Curve

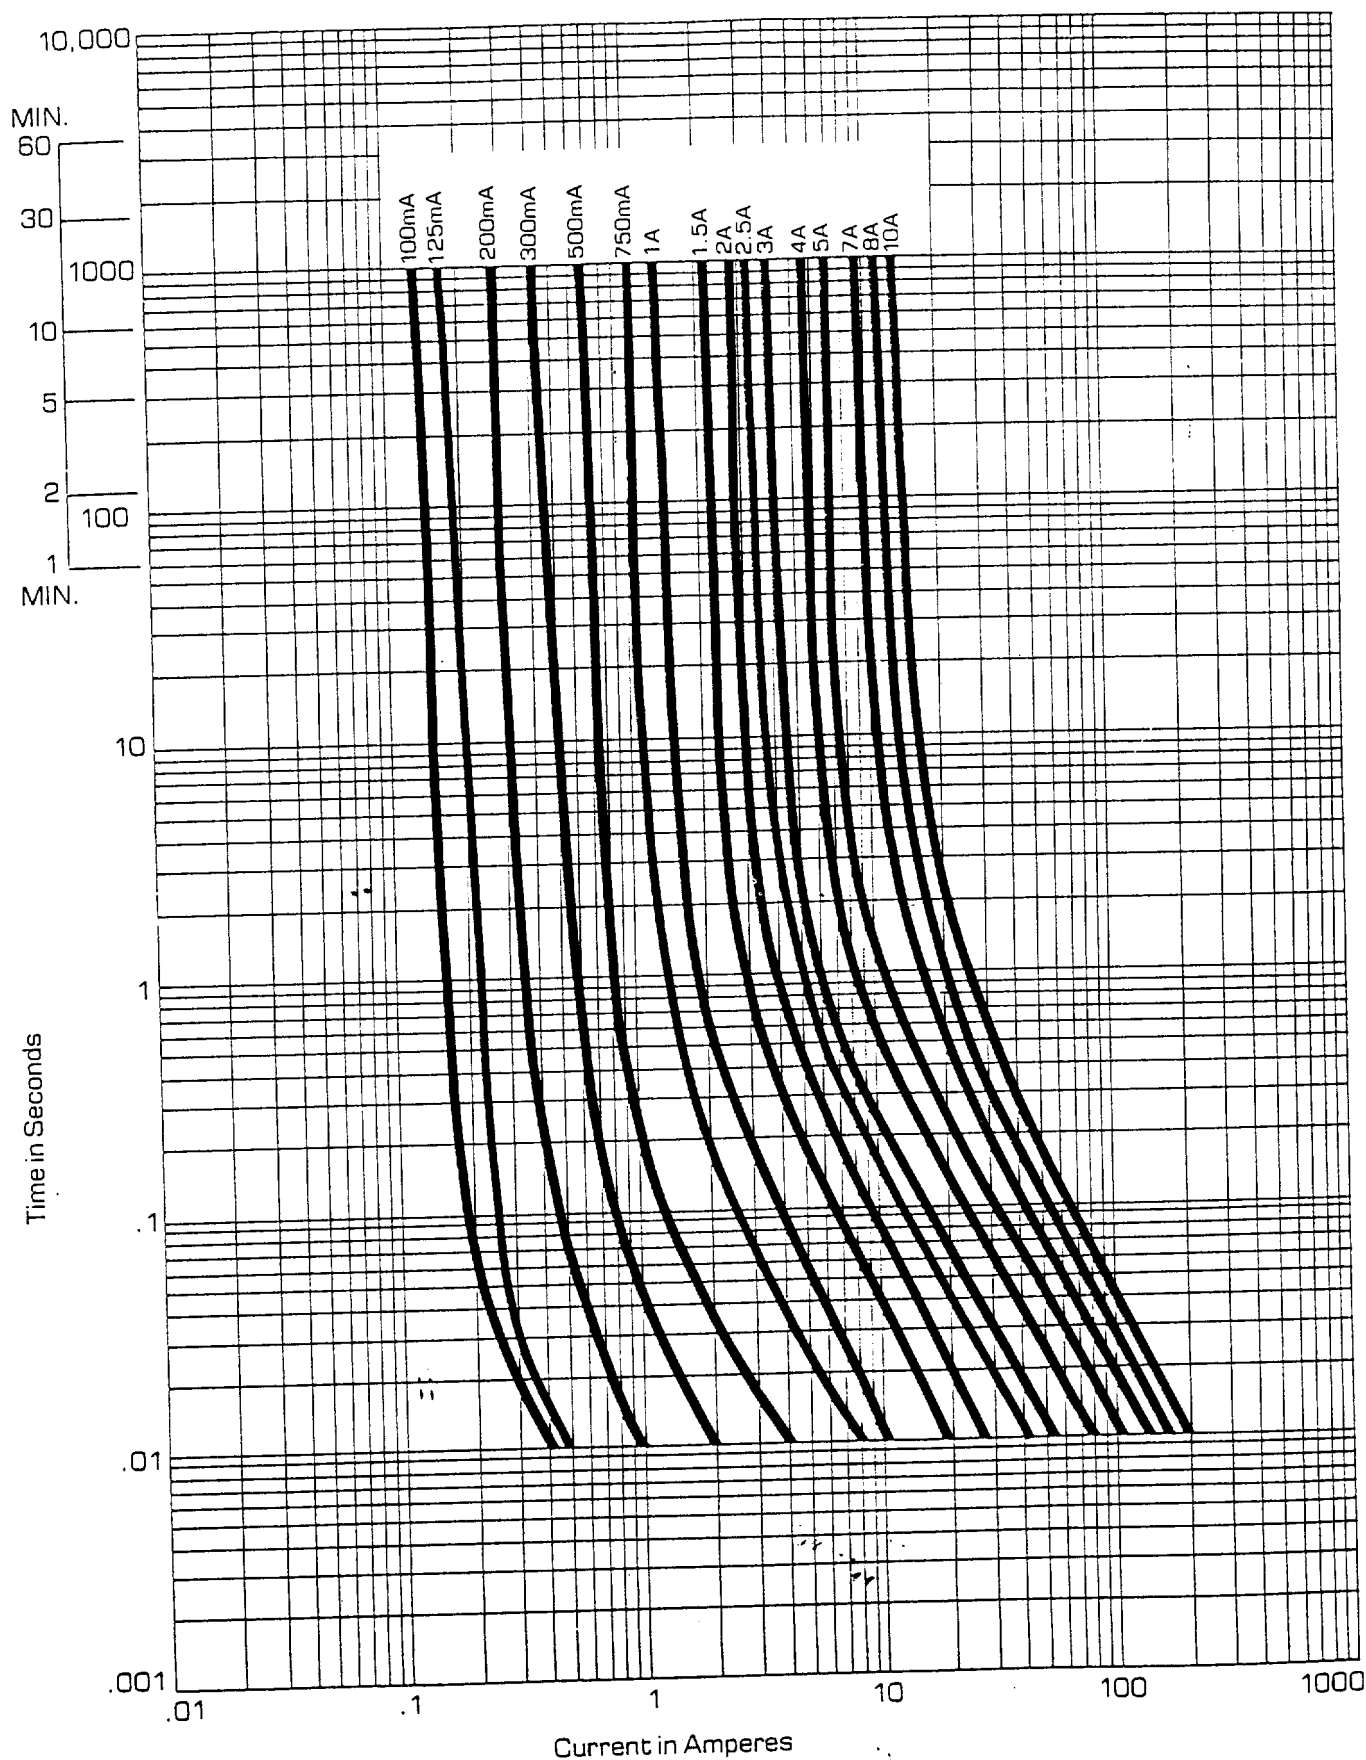

Bel Fuse Inc.

198 Van Vorst Street, Jersey City, New Jersey 07302 • (201) 432-0463 • FAX (201) 432-9542

Specifications Subject To Change Without Notice