


SKINDICHT® SHV-M-VITON

Brass gland for high temperatures
with metric connection thread




**SKINDICHT®
SHV-M-VITON**
with sealing cone of Viton,
compression water-proof,
10 bar

The SKINDICHT® SHV-M high temperature gland is made up of high quality nickel-plated brass. The gland seals to IP 68, making it suitable for applications where besides of dust and moisture also a high temperature is the problem. Aimed at applications where flexing is minimal, the gland will securely anchor the cable. The viton cone allows the gland to work at temperatures up to 165°C.


Suitable accessories see
page 484.



Main body
in brass Metal
washer Viton
cone Brass
cone Brass
securing cap

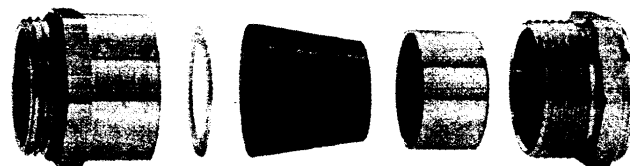

Consignation for ordering
SHV-M 20 / 11 / 7

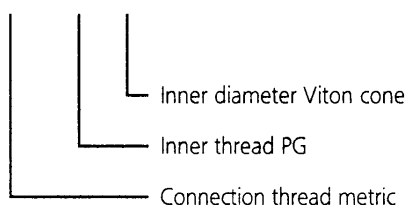


Viton® = registered Trademark of Du Pont de Nemour

Technical Data

Material:
Body: Nickel plated brass
Cone: Viton
O-Ring: Viton

Protection class: IP 68 – 10 bar
 Temperature range:
-15 °C to +200 °C

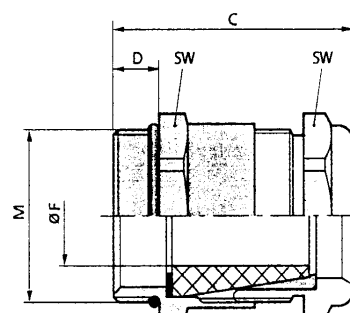

Part No.	Conne- tion thread	thread PG	Inner diameter bush	Inner range F mm	Clamping size 1/2 SW mm	Spanner C mm	D size pieces
SKINDICHT® SHV-M-VITON							
5210 5430	12 x 1,5	7	5	3,5 - 4,5	14/14	26,0	50
5210 5440	16 x 1,5	9	6	4,0 - 5,5	18/17	27,5	50
5210 5450	16 x 1,5	9	7	5,5 - 6,5	18/17	27,5	50
5210 5460	20 x 1,5	11	7	5,5 - 6,5	22/20	31,0	25
5210 5470	20 x 1,5	11	9	7,0 - 8,5	22/20	31,0	25
5210 5480	20 x 1,5	13,5	11	8,0 - 10,5	22/22	32,5	25
5210 5490	20 x 1,5	13,5	9	6,5 - 8,5	22/22	32,5	25
5210 5500	20 x 1,5	16	13	10,5 - 12,5	24/24	34,5	25
5210 5510	20 x 1,5	16	15	12,5 - 14,0	24/24	34,5	25
5210 5520	25 x 1,5	21	18	15,0 - 17,0	30/30	38,0	25
5210 5530	25 x 1,5	21	20	17,5 - 19,0	30/30	38,0	25
5210 5540	32 x 1,5	29	22	19,5 - 20,5	40/40	44,5	25