



Features


- ◇ For IF SAW filter
- ◇ High attenuation
- ◇ Single-ended operation
- ◇ Dual In-line Package
- ◇ No matching required for operation at 50Ω
- ◇ RoHS compliant (2002/95/EC), Pb-free

Specifications

Parameter	Unit	Minimum	Typical	Maximum	
Center Frequency	MHz	117.45	117.6	117.75	
Insertion Loss	dB	-	23.7	27	
3 dB Bandwidth	MHz	10.9	10.92	-	
40 dB Bandwidth	MHz	-	11.67	-	
Passband Variation	dB	-	1.1	1.5	
Absolute Delay	usec	-	3.58	4	
Ultimate Rejection	$f_0 \pm 5.85\text{MHz}$	dB	35	36	-
	$f_0 \pm 6.05\text{MHz}$	dB	45	57	-
	$f_0 \pm 6.45\text{MHz}$	dB	50	58	-
	$f_0 \pm 10.45\text{MHz}$	dB	55	62	-
Material Temperature coefficient	KHz/°C	-11.05			
Substrate Material	-	YZ LN			
Ambient Temperature	°C	25			
Operating Temperature Range	°C	-40	-	+85	
Storage Temperature Range	°C	-45	-	+105	
DC Voltage	V	0			
Input Power	dBm	-	-	10	
ESD Class	-	1A			
Package Size	DIP3512 (35.0x12.8x4.7mm3)				

Notes:


1. All specifications are based on the test circuit shown;
2. In production, all specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature;
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances;
4. This is the optimum impedance in order to achieve the performance show.

	SIPAT Co., Ltd. (CETC No.26 Research Institute) #14 Nanping Huayuan Road, Chongqing, China, 400060	Part Number	LBN11802	
		Rev. Date	2008-07-31	
		Ver.	1.0	Page




Typical Performance

Frequency Respond

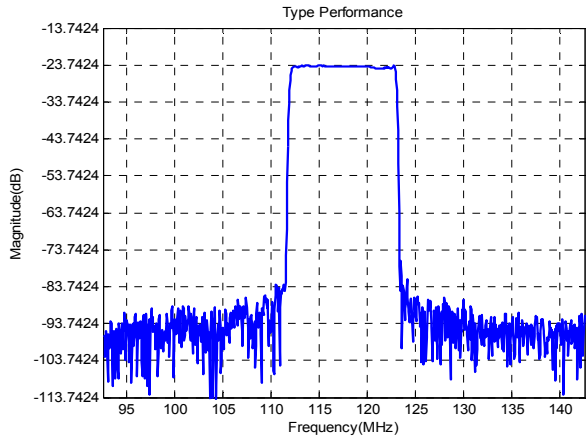


Horizontal: 5MHz/Div Vertical: 10dB/Div

Passband Respond

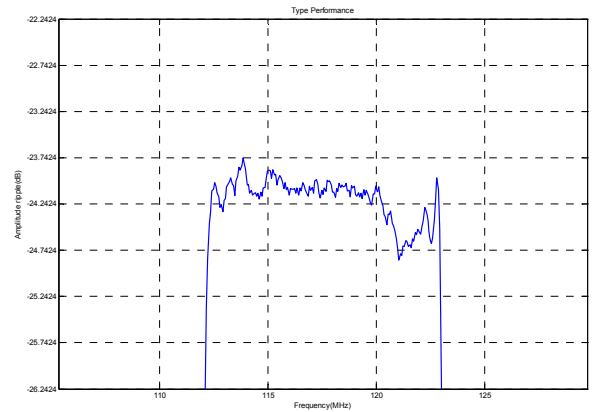


Horizontal: 5MHz/Div Vertical: 0.5dB/Div

Group Delay Variation(f0±5MHz)

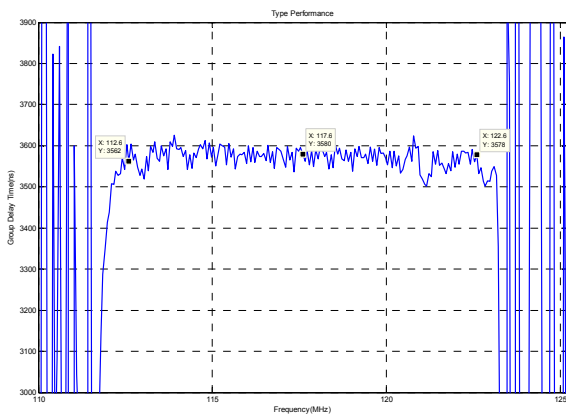


Horizontal: 5MHz/Div Vertical: 100ns/Div

Phase Linearity(f0±5MHz)

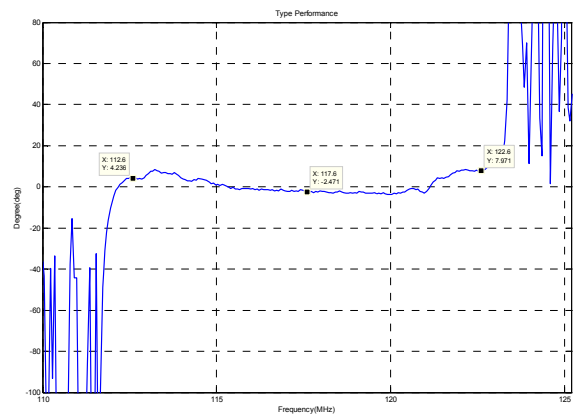


Horizontal: 5MHz/Div Vertical: 20deg/Div

Smith Chart S11

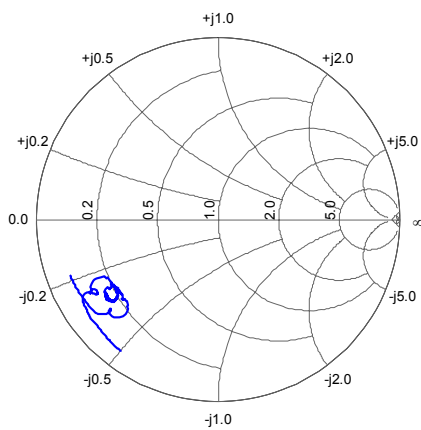

Smith Chart S22

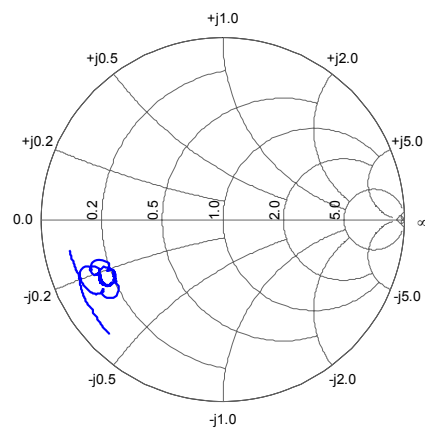

SIPAT Co., Ltd.
(CETC No.26 Research Institute)
#14 Nanping Huayuan Road,
Chongqing, China, 400060

Part Number	LBN11802	
Rev. Date	2008-07-31	
Ver.	1.0	Page 3/3