

JUPF NAUGE.





Compact water-proof wire-to-wire connector, with the use of the 025 terminals and the solid wire-sealing rubber.



Double-leaf construction


Superior contact performance is provided by the double-leaf construction, consisting of the main leaf and the assist leaf.


Housing lances

The contact retention lances on the resilient housing allow the confirmation of contact lock-in for easy and secure insertion.

Inter-housing lock

This inter-housing lock secures the plug to the receptacle and prevents accidental disconnection. The lock protected and is not affected by external forces that might result from the routing of wires.

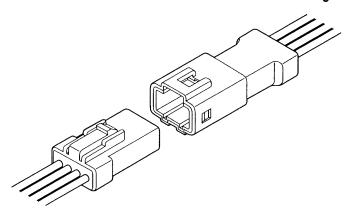



■ Specifications

Current rating: 3.0A AC, DC Voltage rating: 100 V AC, DC

• Temperature : - 25 °C ~ + 85 °C (including temperature range rise in applying electrical current)

• Wires applicable: AWG #26 ~ #22 Insulation O.D.: 1.4 ~1.74 mm dia • No.of circuits : 2 ~4 circuits

J.S.T. MFG. CO., LTD. (URL)http://www.jst-mfg.com

Sales offices
Utsunomiya, Yokohama, Hachiooji, Nagano, Aichi, Osaka, Kurayoshi, Hiroshima,
Fukuoka in Japan and Belgium, Spain, U.K., Germany, France, Italy, U.S.A., Singapore,
Thailand, Malaysiua, China (Hong Kong, Shanghai), Taiwan, Korea, Australia

Engineering Centers
Osaka, Yokohama, Nagoya, Tsuyama, Kurayoshi in Japan and U.S.A., U.K., Singapore