

形

Square Type


3.0mm X 2.0mm Series

Type No.	Lighting Color
LN260RCPP	Red
LN360GCPP	Green
LN460YCPP	Amber

絶対最大定格 Absolute Maximum Ratings (Ta=25 °C)






Lighting Color	P_D (mW)	I_F (mA)	I_{FR} (mA)★	V_R (V)	T_{opr} (°C)	T_{stg} (°C)
Red	70	25	150	4	-25~+85	-30~+100
Green	90	30	150	4	-25~+85	-30~+100
Amber	90	30	150	4	-25~+85	-30~+100

★ I_{FP}の条件は, duty 10%, Pulse width 1 msec. The condition of I_{FP} is duty 10%, Pulse width 1 msec.

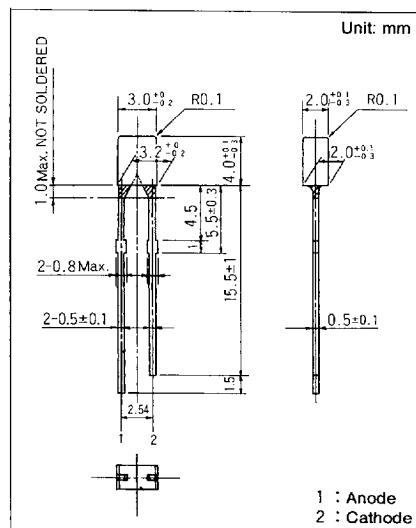

電気的光学的特性 Electro-Optical Characteristics (Ta=25 °C)

Type No.	Lighting Color	Lens Color	I _O		I _F	V _F		λ _P	Δ λ	I _F	I _R	
			Typ.	Min.		Typ.	Max.	Typ.	Typ.		Max.	V _R
LN260RCPP	Red	Red Clear	0.6	0.2	15	2.2	2.8	700	100	20	5	4
LN360GCPP	Green	Green Clear	3.0	1.0	20	2.2	2.8	565	30	20	10	4
LN460YCPP	Amber	Amber Clear	2.0	0.7	20	2.2	2.8	590	30	20	10	4
Unit	—	—	mcd	mcd	mA	V	V	nm	nm	mA	μA	V

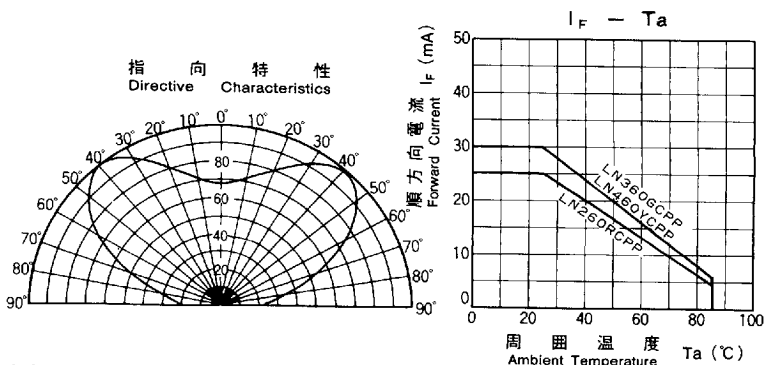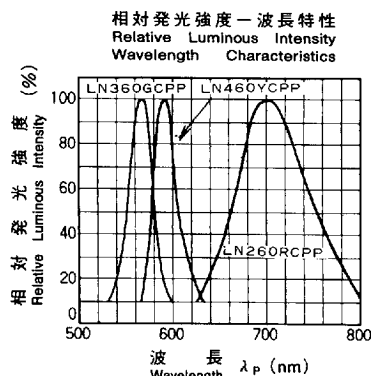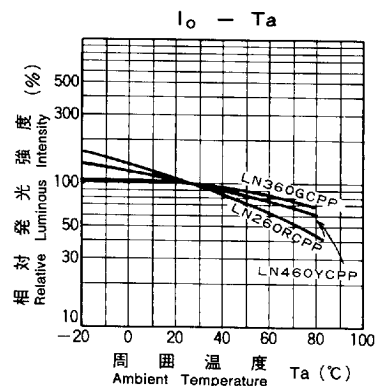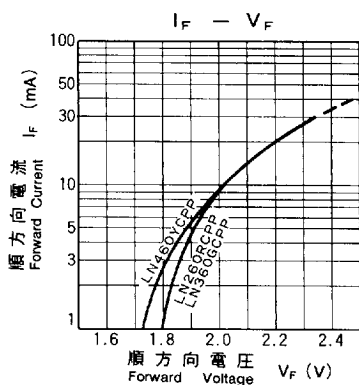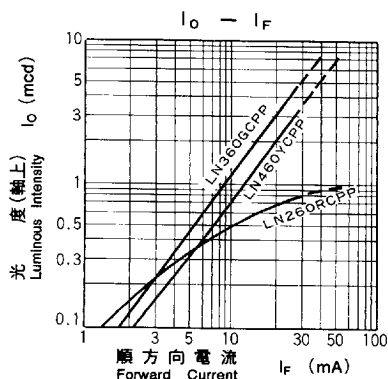

6932852 0014916 T99

Panasonic