


## Dual INT-A-PAK Low Profile "Half-Bridge" (Standard Speed IGBT), 400 A



**Dual INT-A-PAK Low Profile**

### FEATURES

- Generation 4 IGBT technology
- Standard: Optimized for hard switching speed DC to 1 kHz
- Low  $V_{CE(on)}$
- Square RBSOA
- HEXFRED® antiparallel diode with ultrasoft reverse recovery characteristics
- Industry standard package
- $Al_2O_3$  DBC
- UL approved file E78996 
- Compliant to RoHS Directive 2002/95/EC
- Designed for industrial level



**RoHS**  
COMPLIANT

### PRODUCT SUMMARY

|   |        |
|---|--------|
| $V_{CES}$   | 600 V  |
| $I_C$ DC at $T_C = 25\text{ }^{\circ}\text{C}$                | 750 A  |
| $V_{CE(on)}$ (typical) at 400 A, $25\text{ }^{\circ}\text{C}$ | 1.24 V |

### BENEFITS

- Increased operating efficiency
- Performance optimized as output inverter stage for TIG welding machines
- Direct mounting on heatsink
- Very low junction to case thermal resistance

### ABSOLUTE MAXIMUM RATINGS

| PARAMETER                        | SYMBOL               | TEST CONDITIONS   | MAX.     | UNITS |
|----------------------------------|----------------------|---|----------|-------|
| Collector to emitter voltage     | $V_{CES}$            |   | 600      | V     |
| Continuous collector current     | $I_C$ <sup>(1)</sup> | $T_C = 25\text{ }^{\circ}\text{C}$  | 750      | A     |
|                                  |                      | $T_C = 80\text{ }^{\circ}\text{C}$  | 525      |       |
| Pulsed collector current         | $I_{CM}$             |   | 1000     |       |
| Clamped inductive load current   | $I_{LM}$             |   | 1000     |       |
| Diode continuous forward current | $I_F$                | $T_C = 25\text{ }^{\circ}\text{C}$  | 219      |       |
|                                  |                      | $T_C = 80\text{ }^{\circ}\text{C}$  | 145      |       |
| Gate to emitter voltage          | $V_{GE}$             |   | $\pm 20$ | V     |
| Maximum power dissipation (IGBT) | $P_D$                | $T_C = 25\text{ }^{\circ}\text{C}$  | 1563     | W     |
|                                  |                      | $T_C = 80\text{ }^{\circ}\text{C}$  | 875      |       |
| RMS isolation voltage            | $V_{ISOL}$           | Any terminal to case<br>( $V_{RMS} t = 1\text{ s}$ , $T_J = 25\text{ }^{\circ}\text{C}$ ) | 3500     | V     |

#### Note

<sup>(1)</sup> Maximum continuous collector current must be limited to 500 A to do not exceed the maximum temperature of terminals

Vishay Semiconductors Dual INT-A-PAK Low Profile "Half-Bridge"  
(Standard Speed IGBT), 400 A

| <b>ELECTRICAL SPECIFICATIONS</b> ( $T_J = 25\text{ }^{\circ}\text{C}$ unless otherwise specified) |              |   |      |       |           |       |
|---|--------------|---|------|-------|-----------|-------|
| PARAMETER   | SYMBOL       | TEST CONDITIONS   | MIN. | TYP.  | MAX.      | UNITS |
| Collector to emitter breakdown voltage  | $V_{BR(CE)}$ | $V_{GE} = 0\text{ V}$ , $I_C = 500\text{ }\mu\text{A}$                                | 600  | -     | -         | V     |
| Collector to emitter voltage  | $V_{CE(on)}$ | $V_{GE} = 15\text{ V}$ , $I_C = 300\text{ A}$   | -    | 1.14  | 1.35      |       |
|   |              | $V_{GE} = 15\text{ V}$ , $I_C = 400\text{ A}$   | -    | 1.24  | 1.52      |       |
|   |              | $V_{GE} = 15\text{ V}$ , $I_C = 300\text{ A}$ , $T_J = 125\text{ }^{\circ}\text{C}$   | -    | 1.08  | 1.29      |       |
|   |              | $V_{GE} = 15\text{ V}$ , $I_C = 400\text{ A}$ , $T_J = 125\text{ }^{\circ}\text{C}$   | -    | 1.21  | 1.5       |       |
| Gate threshold voltage  | $V_{GE(th)}$ | $V_{CE} = V_{GE}$ , $I_C = 250\text{ }\mu\text{A}$                                    | 3.0  | 4.6   | 6.3       | mA    |
| Collector to emitter leakage current  | $I_{CES}$    | $V_{GE} = 0\text{ V}$ , $V_{CE} = 600\text{ V}$                                       | -    | 0.075 | 1         |       |
|   |              | $V_{GE} = 0\text{ V}$ , $V_{CE} = 600\text{ V}$ , $T_J = 125\text{ }^{\circ}\text{C}$ | -    | 1.8   | 10        | V     |
| Diode forward voltage drop  | $V_{FM}$     | $I_{FM} = 300\text{ A}$   | -    | 1.48  | 1.75      |       |
|   |              | $I_{FM} = 400\text{ A}$   | -    | 1.63  | 1.98      |       |
|   |              | $I_{FM} = 300\text{ A}$ , $T_J = 125\text{ }^{\circ}\text{C}$                         | -    | 1.50  | 1.77      |       |
|   |              | $I_{FM} = 400\text{ A}$ , $T_J = 125\text{ }^{\circ}\text{C}$                         | -    | 1.70  | 2.04      |       |
| Gate to emitter leakage current   | $I_{GES}$    | $V_{GE} = \pm 20\text{ V}$  | -    | -     | $\pm 200$ | nA    |

| <b>SWITCHING CHARACTERISTICS</b> ( $T_J = 25\text{ }^{\circ}\text{C}$ unless otherwise specified) |              |   |            |       |      |               |
|---|--------------|---|------------|-------|------|---------------|
| PARAMETER   | SYMBOL       | TEST CONDITIONS   | MIN.       | TYP.  | MAX. | UNITS         |
| Turn-on switching loss  | $E_{on}$     | $I_C = 400\text{ A}$ , $V_{CC} = 360\text{ V}$ , $V_{GE} = 15\text{ V}$ ,<br>$R_g = 1.5\text{ }\Omega$ , $L = 500\text{ }\mu\text{H}$ , $T_J = 25\text{ }^{\circ}\text{C}$  | -          | 8.5   | -    | mJ            |
| Turn-off switching loss   | $E_{off}$    |   | -          | 113   | -    |               |
| Total switching loss  | $E_{tot}$    |   | -          | 121.5 | -    |               |
| Turn-on switching loss  | $E_{on}$     | $I_C = 400\text{ A}$ , $V_{CC} = 360\text{ V}$ , $V_{GE} = 15\text{ V}$ ,<br>$R_g = 1.5\text{ }\Omega$ , $L = 500\text{ }\mu\text{H}$ , $T_J = 125\text{ }^{\circ}\text{C}$   | -          | 21    | -    |               |
| Turn-off switching loss   | $E_{off}$    |   | -          | 163   | -    |               |
| Total switching loss  | $E_{tot}$    |   | -          | 184   | -    |               |
| Turn-on delay time  | $t_{d(on)}$  |   | -          | 532   | -    | ns            |
| Rise time   | $t_r$        |   | -          | 377   | -    |               |
| Turn-off delay time   | $t_{d(off)}$ |   | -          | 496   | -    |               |
| Fall time   | $t_f$        |   | -          | 1303  | -    |               |
| Reverse bias safe operating area  | RBSOA        | $T_J = 150\text{ }^{\circ}\text{C}$ , $I_C = 1000\text{ A}$ , $V_{CC} = 400\text{ V}$ ,<br>$V_P = 600\text{ V}$ , $R_g = 22\text{ }\Omega$ , $V_{GE} = 15\text{ V to }0\text{ V}$ ,<br>$L = 500\text{ }\mu\text{H}$ | Fullsquare |       |      |               |
| Diode reverse recovery time   | $t_{rr}$     | $I_F = 300\text{ A}$ , $di_F/dt = 500\text{ A}/\mu\text{s}$ ,<br>$V_{CC} = 400\text{ V}$ , $T_J = 25\text{ }^{\circ}\text{C}$   | -          | 150   | 179  | ns            |
| Diode peak reverse current  | $I_{rr}$     |   | -          | 43    | 59   | A             |
| Diode recovery charge   | $Q_{rr}$     |   | -          | 3.9   | 6.3  | $\mu\text{C}$ |
| Diode reverse recovery time   | $t_{rr}$     | $I_F = 300\text{ A}$ , $di_F/dt = 500\text{ A}/\mu\text{s}$ ,<br>$V_{CC} = 400\text{ V}$ , $T_J = 125\text{ }^{\circ}\text{C}$  | -          | 236   | 265  | ns            |
| Diode peak reverse current  | $I_{rr}$     |   | -          | 64    | 80   | A             |
| Diode recovery charge   | $Q_{rr}$     |   | -          | 8.6   | 11.1 | $\mu\text{C}$ |



| THERMAL AND MECHANICAL SPECIFICATIONS            |                                    |      |      |      |       |
|--|------------------------------------|------|------|------|-------|
| PARAMETER  | SYMBOL                             | MIN. | TYP. | MAX. | UNITS |
| Operating junction and storage temperature range | $T_J, T_{Stg}$                     | - 40 | -    | 150  | °C    |
| Junction to case per leg                         | IGBT                               | -    | -    | 0.08 | °C/W  |
|  | Diode                              | -    | -    | 0.4  |       |
| Case to sink per module                          | $R_{thCS}$                         | -    | 0.05 | -    |       |
| Mounting torque                                  | case to heatsink: M6 screw         | 4    | -    | 6    | Nm    |
|  | case to terminal 1, 2, 3: M5 screw | 2    | -    | 4    |       |
| Weight   |                                    | -    | 270  | -    | g     |

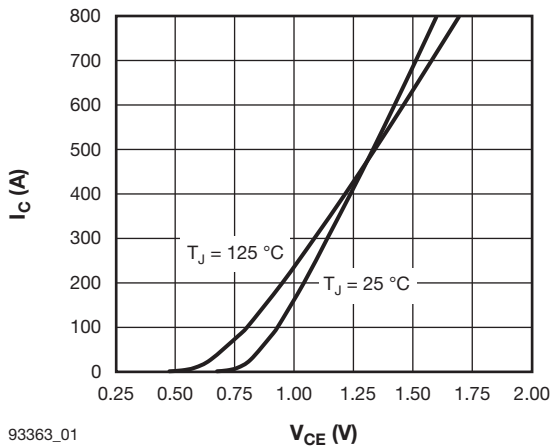


Fig. 1 - Typical Output Characteristics,  
 $T_J = 25\text{ °C}$ ,  $V_{GE} = 15\text{ V}$

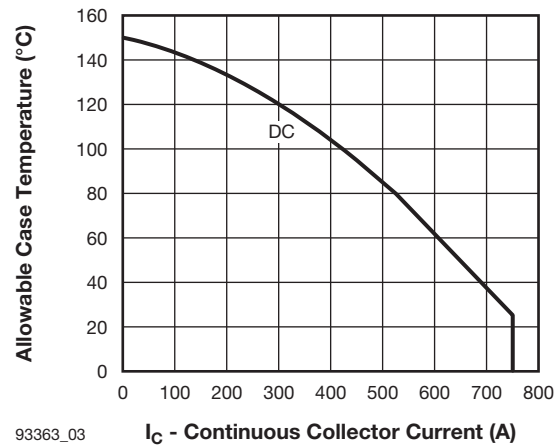


Fig. 3 - Maximum DC IGBT Collector Current vs.  
Case Temperature

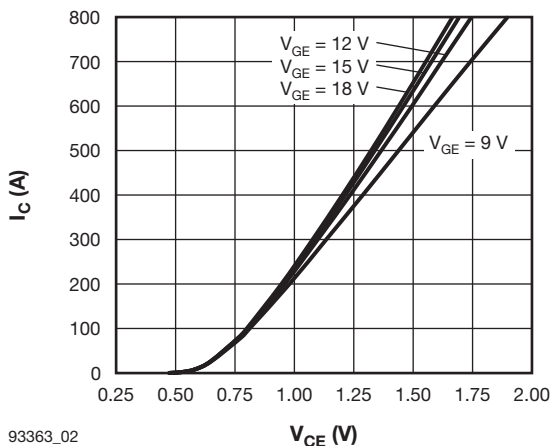


Fig. 2 - Typical Output Characteristics,  
 $T_J = 125\text{ °C}$

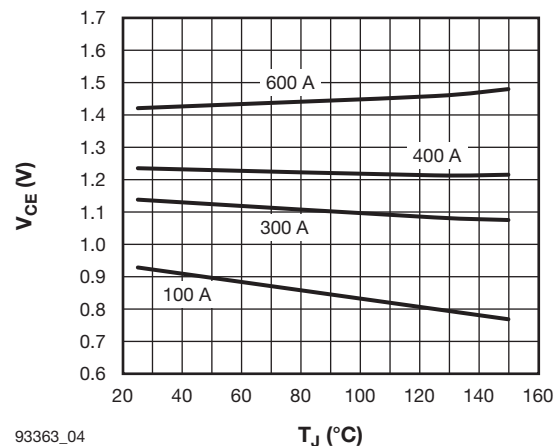


Fig. 4 - Typical IGBT Collector to Emitter Voltage vs.  
Junction Temperature,  
 $V_{GE} = 15\text{ V}$

Vishay Semiconductors Dual INT-A-PAK Low Profile "Half-Bridge"  
(Standard Speed IGBT), 400 A

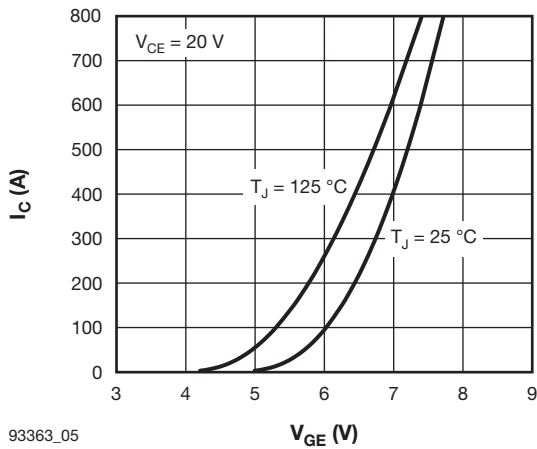


Fig. 5 - Typical IGBT Transfer Characteristics

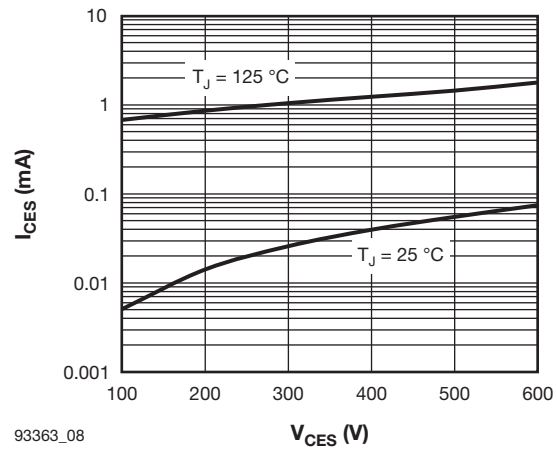


Fig. 8 - Typical IGBT Zero Gate Voltage Collector Current

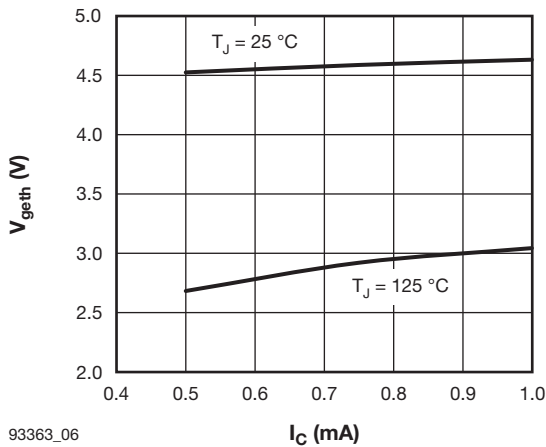


Fig. 6 - Typical IGBT Gate Threshold Voltage

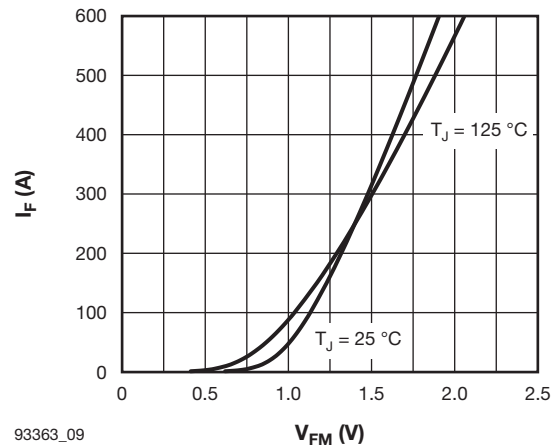


Fig. 9 - Typical Diode Forward Characteristics

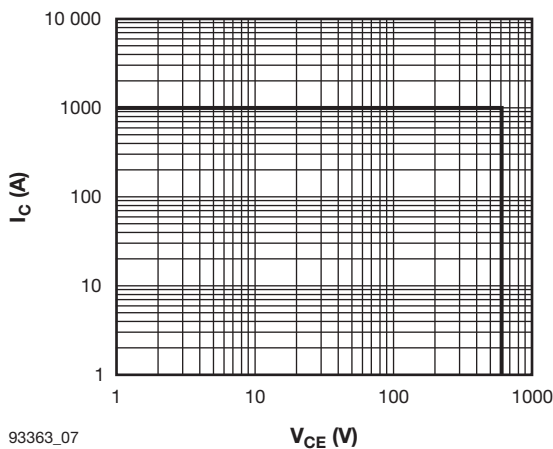


Fig. 7 - IGBT Reverse Bias SOA,  
 $T_J = 150\text{ °C}$ ,  $V_{GE} = 15\text{ V}$ ,  $R_g = 22\text{ }\Omega$

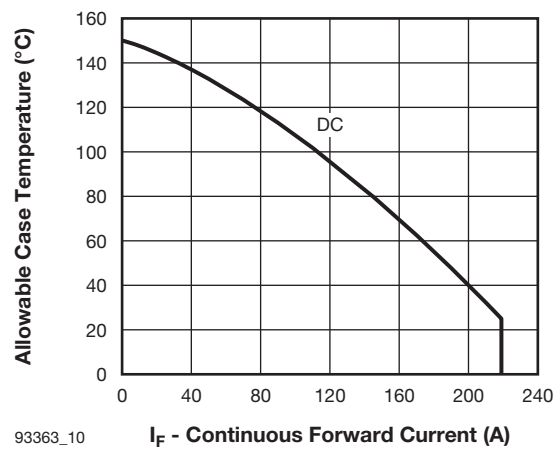


Fig. 10 - Maximum DC Forward Current vs. Case Temperature

# Dual INT-A-PAK Low Profile "Half-Bridge" Vishay Semiconductors (Standard Speed IGBT), 400 A

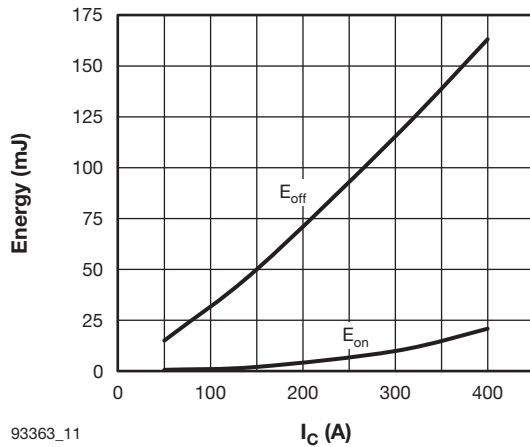


Fig. 11 - Typical IGBT Energy Loss vs.  $I_C$ ,  
 $T_J = 125^\circ\text{C}$ ,  $V_{CC} = 360\text{ V}$ ,  $R_g = 1.5\ \Omega$ ,  
 $V_{GE} = 15\text{ V}$ ,  $L = 500\ \mu\text{H}$

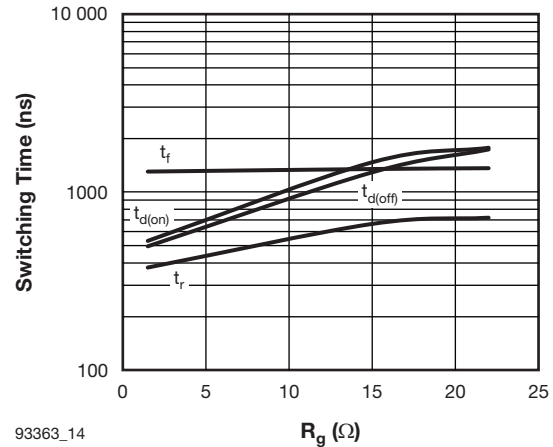


Fig. 14 - Typical IGBT Switching Time vs.  $R_g$ ,  
 $T_J = 125^\circ\text{C}$ ,  $I_C = 400\text{ A}$ ,  $V_{CC} = 360\text{ V}$ ,  
 $V_{GE} = 15\text{ V}$ ,  $L = 500\ \mu\text{H}$

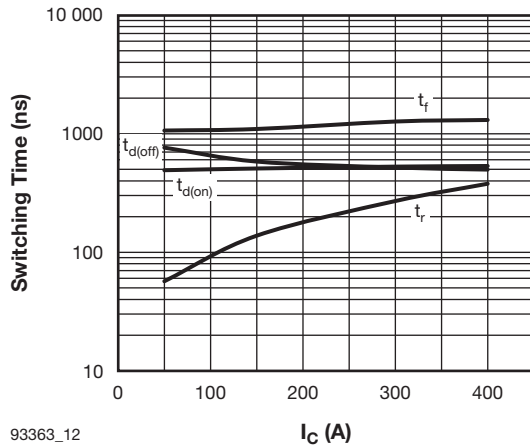


Fig. 12 - Typical IGBT Switching Time vs.  $I_C$ ,  
 $T_J = 125^\circ\text{C}$ ,  $V_{CC} = 360\text{ V}$ ,  $R_g = 1.5\ \Omega$ ,  
 $V_{GE} = 15\text{ V}$ ,  $L = 500\ \mu\text{H}$

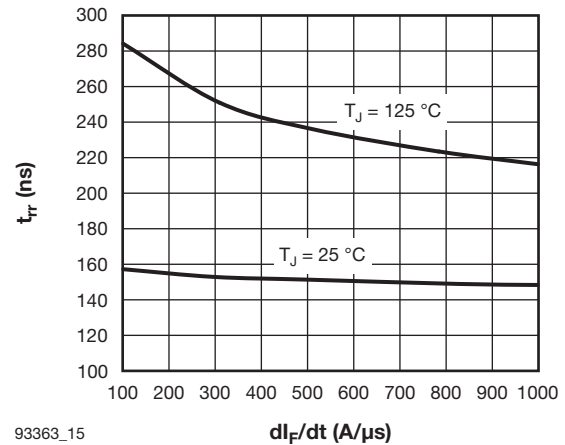


Fig. 15 - Typical Reverse Recovery Time vs.  $dI_F/dt$ ,  
 $V_{CC} = 400\text{ V}$ ,  $I_F = 300\text{ A}$

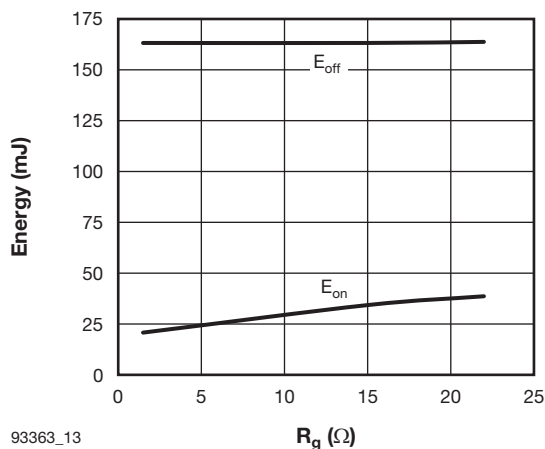


Fig. 13 - Typical IGBT Energy Loss vs.  $R_g$ ,  
 $T_J = 125^\circ\text{C}$ ,  $I_C = 400\text{ A}$ ,  $V_{CC} = 360\text{ V}$ ,  
 $V_{GE} = 15\text{ V}$ ,  $L = 500\ \mu\text{H}$

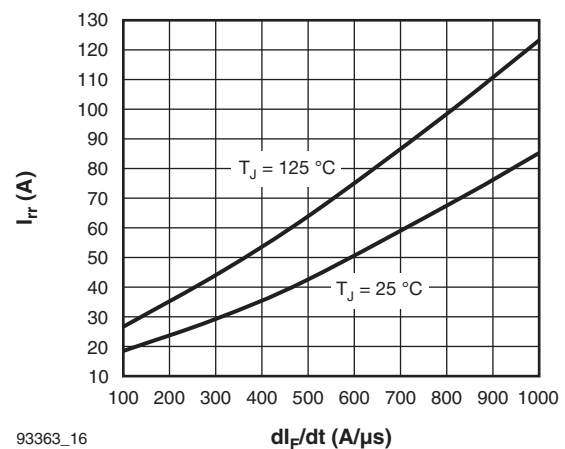


Fig. 16 - Typical Reverse Recovery Current vs.  $dI_F/dt$ ,  
 $V_{CC} = 400\text{ V}$ ,  $I_F = 300\text{ A}$

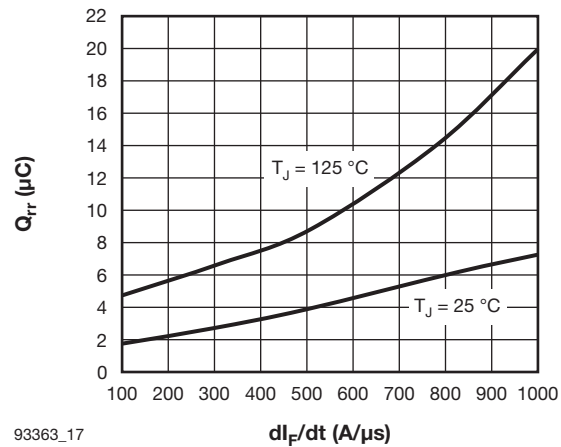


Fig. 17 - Typical Reverse Recovery Charge vs.  $di_F/dt$ ,  
 $V_{CC} = 400\text{ V}$ ,  $I_F = 300\text{ A}$

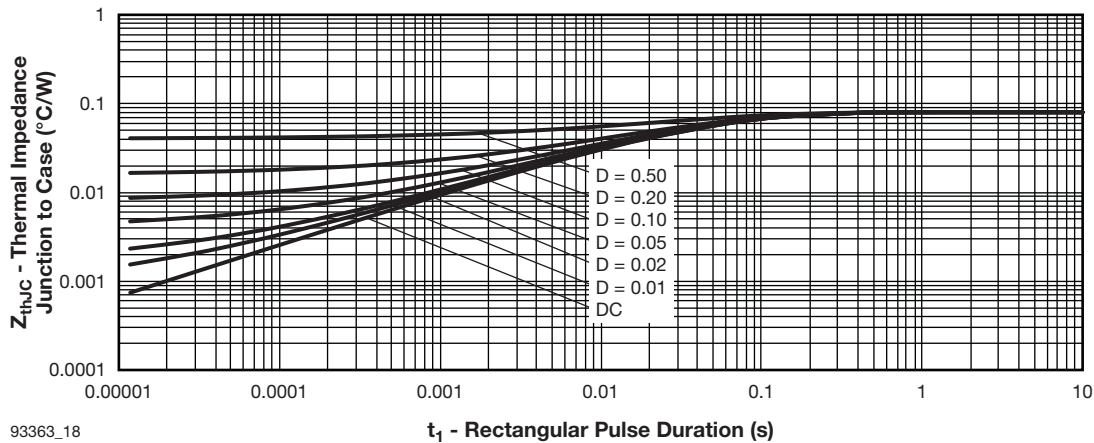


Fig. 18 - Maximum Thermal Impedance  $Z_{thJC}$  Characteristics (IGBT)

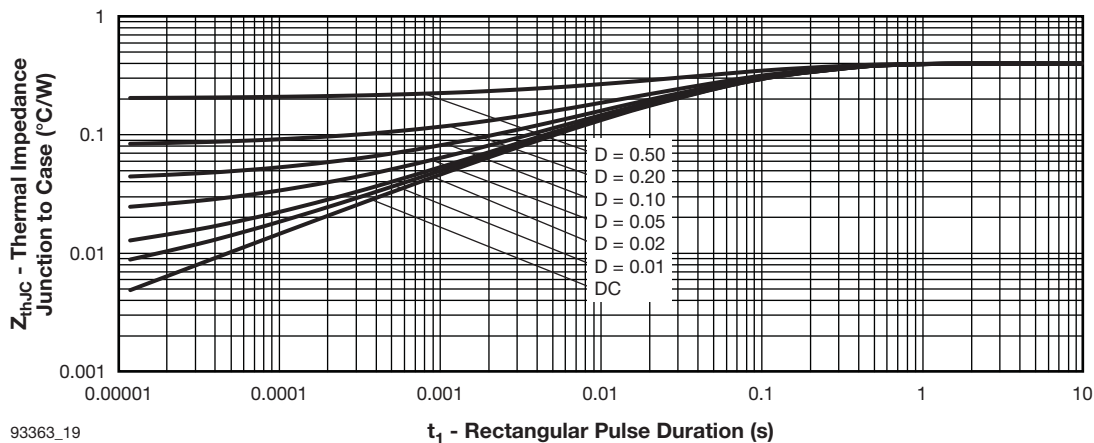


Fig. 19 - Maximum Thermal Impedance  $Z_{thJC}$  Characteristics (Diode)




**ORDERING INFORMATION TABLE**

|             |   |   |     |   |   |    |   |
|-------------|---|---|-----|---|---|----|---|
| Device code | G | A | 400 | T | D | 60 | S |
|             | 1 | 2 | 3   | 4 | 5 | 6  | 7 |

|   |   |  |
|---|---|--|
| 1 | - | Insulated Gate Bipolar Transistor (IGBT)           |
| 2 | - | A = Generation 4 IGBT                              |
| 3 | - | Current rating (400 = 400 A)                       |
| 4 | - | Circuit configuration (T = Half-bridge)            |
| 5 | - | Package indicator (D = Dual INT-A-PAK Low Profile) |
| 6 | - | Voltage rating (60 = 600 V)                        |
| 7 | - | Speed/type (S = Standard Speed IGBT)               |

**CIRCUIT CONFIGURATION**

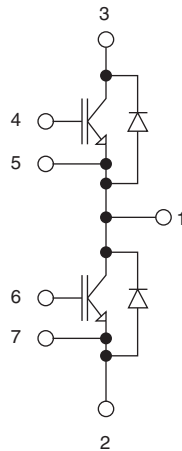

| LINKS TO RELATED DOCUMENTS |  |
|----------------------------|--|
| Dimensions                 | <a href="http://www.vishay.com/doc?95435">www.vishay.com/doc?95435</a> |



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.