

HCMOS 3.2x2.5mm 3.3V SMD Oscillator



Model: F330A Series

RoHS Compliant / Pb Free

Rev. 7/23/2007

Page 1 of 2

http://www.foxonline.com/need_a_sample.htm

Need a
Sample®

FEATURES

- 3.3V Operation
- HCMOS Output
- Standby Function
- Tape and Reel (2,000 pcs. STD)

• PART NUMBER SELECTION [Learn More - Internet Required](#)



Part Number	Model Number	Frequency Stability ¹	Operating Temperature (°C)	Frequency Range (MHz)
584A-Frequency-xxxxx	F330A	±100PPM	-10 ~ +70	1.800 ~ 50.000
585A-Frequency-xxxxx	F330AR	±100PPM	-40 ~ +85	1.800 ~ 50.000
586A-Frequency-xxxxx	F335A	±50PPM	-10 ~ +70	1.800 ~ 50.000
587A-Frequency-xxxxx	F335AR	±50PPM	-40 ~ +85	1.800 ~ 50.000
588A-Frequency-xxxxx	F336A	±25PPM	-10 ~ +70	1.800 ~ 50.000
589A-Frequency-xxxxx	F336AR	±25PPM	-40 ~ +85	1.800 ~ 50.000
590A-Frequency-xxxxx	F338A	±20PPM	-10 ~ +70	1.800 ~ 50.000

• ELECTRICAL CHARACTERISTICS

PARAMETERS	MAX (unless otherwise noted)
Frequency Range (Fo)	1.800 ~ 50.000 MHz
Storage Temperature Range (Tstg)	-55°C ~ +125°C
Supply Voltage (VDD)	3.3V ± 5%
Input Current (IDD) (No Load)	
1.800 ~ 32.000 MHz	2.5mA
32.000+ ~ 50.000 MHz	3.5mA
Output Symmetry (50% VDD)	45% ~ 55%
Rise Time (10% ~ 90% VDD) (Tr)	12nS
Fall Time (90% ~ 10% VDD) (Tf)	12nS
Output Voltage (VOL)	10% VDD
(VOH)	90% VDD Min
Output Current (IOL)	2mA Min
(IOH)	-2mA Min
Output Load (HCMOS)	15pF
Standby Current	1µA
Start-up Time (Ts)	5mS
Output Disable Time ²	150nS
Output Enable Time ²	5mS
Reflow Soldering Temp	260°C / 10 Seconds
Moisture Sensitivity Level (MSL)	1
Termination Finish	Au

¹ Inclusive operating temperature range, input voltage change, load change, aging, shock, and vibration.

² An internal pullup resistor from pin 1 to pin 4 allows active output if pin 1 is left open.
Note: A 0.01µF bypass capacitor should be placed between VDD (Pin 4) and GND (Pin 2) to minimize power supply line noise. All specifications subject to change without notice.

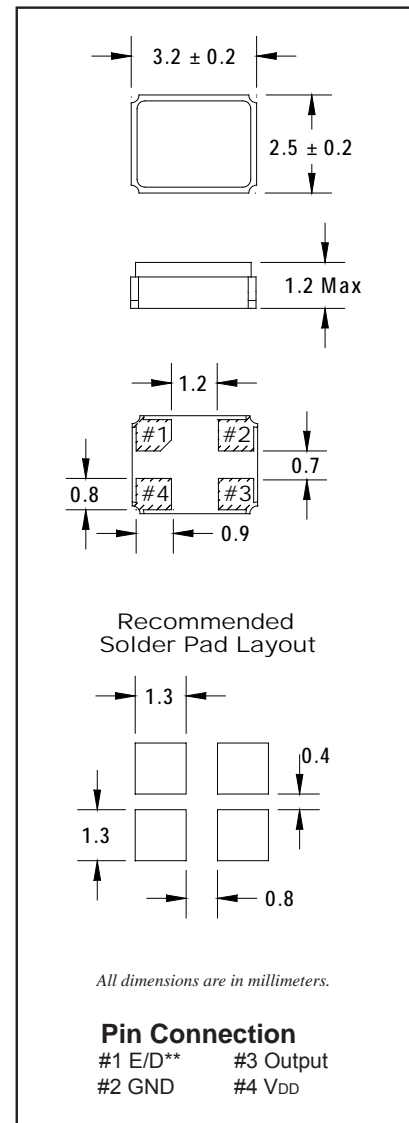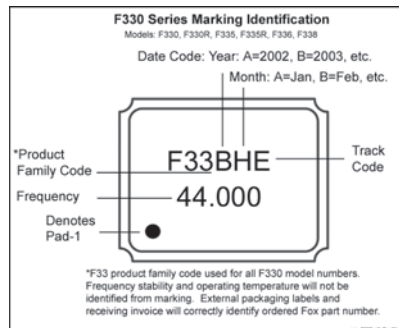

• ENABLE / DISABLE FUNCTION

INH (Pin 1)	OUTPUT (Pin 3)
OPEN ²	ACTIVE
'1' Level VIH ≥ 70% VDD	ACTIVE
'0' Level VIL ≤ 30% VDD	High Z

HCMOS 3.2x2.5mm 3.3V SMD Oscillator

Low Current



Model: F330A SERIES

RoHS Compliant / Pb Free

Rev. 7/23/2007

Page 2 of 2

http://www.foxonline.com/need_a_sample.htm



• TAPE SPECIFICATIONS (millimeters)

MODEL	A	B	C	D	E	F	STD Reel QTY
F330A Series	∅1.5	4.0	4.0	3.5	8.0	1.3	2,000

• REEL SPECIFICATIONS (millimeters)

MODEL	G	H	I	J	K	L	M
F330A Series	2.0	∅13	∅21	∅60	∅180	9.0	1.2

