



GP30AH THRU GP30MH


SINTERED GLASS PASSIVATED JUNCTION RECTIFIER

Reverse Voltage - 50 to 1000 Volts

Forward Current - 3.0 Amperes

PATENTED

DO-201AD

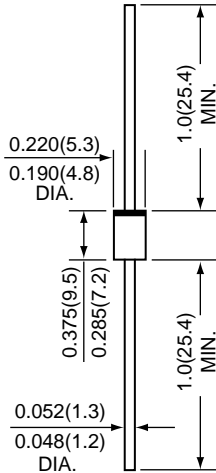

*Dimensions in inches and (millimeters)

SUPEREX II™



FEATURES

- * Halogen-free type
- * Compliance to RoHS Product
- * GPRC (Glass Passivated Rectifier Chip) inside
- * Glass passivated cavity-free junction
- * Capable of meeting environmental standards of MIL-S-19500
- * 3.0 Amperes operation at $T_A=55^\circ\text{C}$ with no thermal runaway
- * High temperature soldering guaranteed: $260^\circ\text{C}/10$ seconds, 0.375" (9.5mm) lead length, 5lbs. (2.3 kg) tension
- * Plastic package has Underwriters Laboratory Flammability Classification 94V-0

MECHANICAL DATA

Case : JEDEC DO-201AD molded plastic over glass body

Terminals : Tin Plated, solderable per MIL-STD-750, Method 2026

Polarity : Color band denotes cathode end

Weight : 0.04 ounces , 1.12 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.	SYMBOLS	GP30							UNITS
		AH	BH	DH	GH	JH	KH	MH	
Maximum repetitive peak reverse voltage	VRRM	50	100	200	400	600	800	1000	Volts
Maximum RMS voltage	VRMS	35	70	140	280	420	560	700	Volts
Maximum DC blocking voltage	VDC	50	100	200	400	600	800	1000	Volts
Maximum average forward rectified current 0.375" (9.5mm) lead length at $T_A=55^\circ\text{C}$	I (AV)	3.0							Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	IFSM	125							Amps
Maximum instantaneous forward voltage at 3.0 A	VF	1.0							Volts
Maximum DC reverse current at rated DC blocking voltage $T_A=25^\circ\text{C}$ $T_A=125^\circ\text{C}$ $T_A=150^\circ\text{C}$	IR	5 50 100							uA
Typical junction capacitance (NOTE 1)	CJ	40							pF
Typical thermal resistance (NOTE 2)	R θ JA R θ JL	20 10							°C / W
Operating junction and storage temperature range	TJ,TSTG	-65 to +175							°C

NOTES : (1) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts

(2) Thermal resistance from junction to ambient and from junction to lead at 0.375" (9.5mm) lead lengths, P.C.B. mounted.

RATINGS AND CHARACTERISTIC CURVES GP30AH THRU GP30MH

FIG.1 - FORWARD CURRENT DERATING CURVE

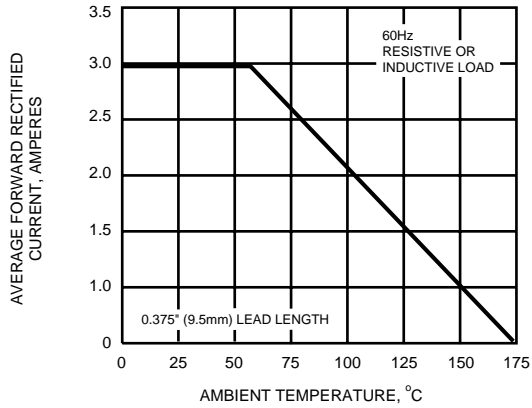


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

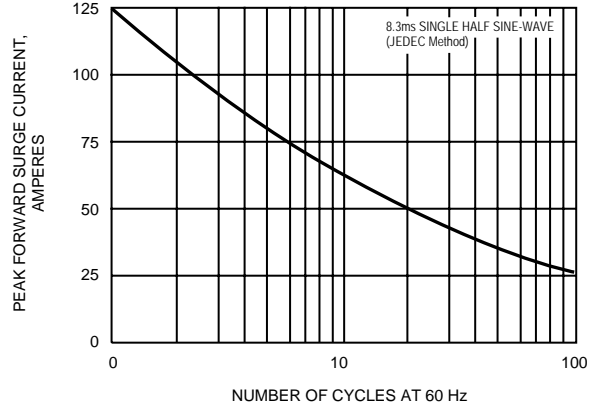


FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

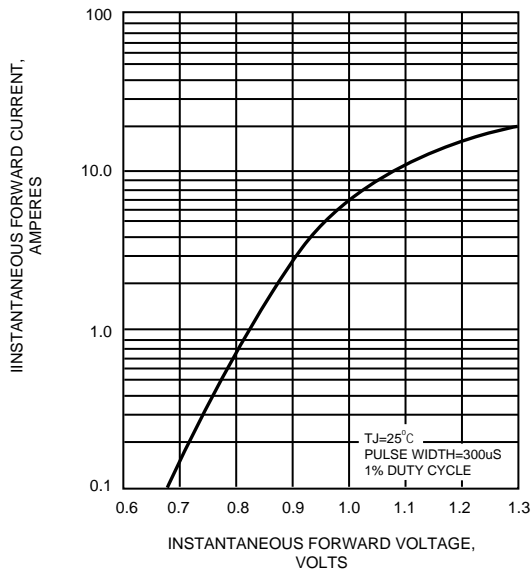


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

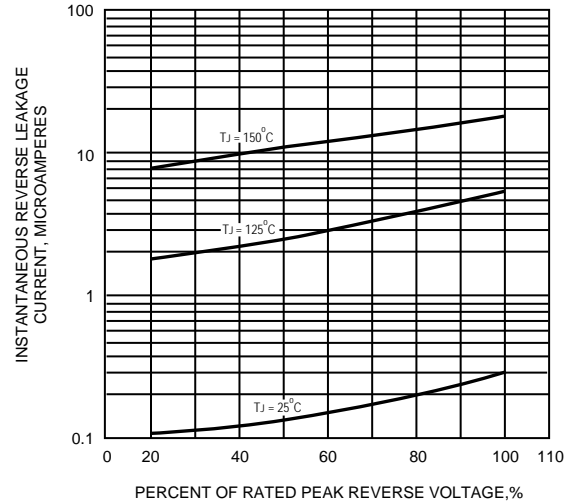


FIG.5 - TYPICAL JUNCTION CAPACITANCE

