

**VI TELEFILTER**

**Filter specification**

**TFS 70H33**

**1/5**

**Measurement condition**

|                          |                  |     |
|--------------------------|------------------|-----|
| Ambient temperature:     | 25               | °C  |
| Input power level:       | 0                | dBm |
| Terminating impedance: * |                  |     |
| Input:                   | 151 Ω    21,3 pF |     |
| Output:                  | 147 Ω    21,5 pF |     |

**Characteristics**

Remark:

The reference level for the relative attenuation  $a_{rel}$  of the TFS 70H33 is the minimum of the pass band attenuation  $a_{min}$ . The minimum of the pass band attenuation  $a_{min}$  is defined as the insertion loss  $a_e$ . The centre frequency  $f_c$  is the arithmetic mean value of the upper and lower frequencies at the 20 dB filter attenuation level relative to the insertion loss  $a_e$ . The temperature coefficient of frequency  $TC_f$  is valid for both the reference frequency  $f_c$  and the frequency response of the filter in the operating temperature range. The frequency shift of the filter in the operating temperature range is not included in the production tolerance scheme.

| D a t a   |  | typ. value       |                      | tolerance / limit |                     |       |
|---|--|------------------|----------------------|-------------------|---------------------|-------|
| <b>Insertion loss</b><br>(reference level)            |  | $a_e$            | 24,5 dB              | max.              | 26 dB               |       |
| <b>Centre frequency at ambient temperature</b>        |  | $f_c$            | 70,0 MHz             |                   | ± 0,09 MHz          |       |
| <b>Passband</b>                                       |  | PB               |                      | $f_c$             | ± 2,5 MHz           |       |
| <b>Amplitude ripple at <math>f_c \pm 2</math> MHz</b> |  |                  | 0,3 dB               | max.              | 0,8 dB              |       |
| <b>Bandwidth</b>                                      |  | BW               |                      |                   |                     |       |
| 1 dB  |  |                  | 4,82 MHz             | min.              | 4,5 MHz             |       |
| 3 dB  |  |                  | 5,28 MHz             | min.              | 5,0 MHz             |       |
| 20 dB   |  |                  | 6,55 MHz             |                   | -                   |       |
| 40 dB   |  |                  | 7,19 MHz             | max.              | 7,5 MHz             |       |
| 55 dB   |  |                  | 7,44 MHz             |                   | -                   |       |
| <b>Relative attenuation</b>                           |  | $a_{rel}$        |                      |                   |                     |       |
| $f_c$   |  | ...              | $f_c \pm 2$ MHz      | -                 |                     |       |
| $f_c \pm 2$ MHz                                       |  | ...              | $f_c \pm 2,25$ MHz   | max.              | 0,8 dB              |       |
| $f_c \pm 2,25$ MHz                                    |  | ...              | $f_c \pm 2,5$ MHz    | max.              | 1 dB                |       |
| $f_c \pm 2,5$ MHz                                     |  | ...              | $f_c \pm 2,5$ MHz    | max.              | 3 dB                |       |
| $f_c \pm 3,75$ MHz                                    |  | ...              | $f_c \pm 5$ MHz      | 50 ... 57 dB      | min.                | 40 dB |
| $f_c \pm 5$ MHz                                       |  | ...              | $f_c \pm 30$ MHz     | 65 dB             | min.                | 50 dB |
| <b>Group delay</b>                                    |  | mean value in PB | 2,9 µs               |                   | -                   |       |
| <b>Group delay ripple within PB p-p</b>               |  |                  | 35 ns                | max.              | 90 ns               |       |
| <b>Deviation from linear phase within PB</b>          |  |                  | 2° p-p (r.m.s. 0,5°) | max.              | 5° p-p              |       |
| <b>Triple transit response suppression</b>            |  |                  | 54 dB                |                   | -                   |       |
| <b>Crosstalk</b>                                      |  |                  | 60 dB                |                   | -                   |       |
| <b>Operating temperature range</b>                    |  | OTR              | -                    |                   | - 40 °C ... + 85 °C |       |
| <b>Storage temperature range</b>                      |  |                  | -                    |                   | - 55 °C ... + 85 °C |       |
| <b>Temperature coefficient of frequency</b>           |  | $TC_f$ **        | - 19 ppm/K           |                   | -                   |       |

\*) The terminating impedances depend on parasitics and q-values of matching elements and the board used, and are to be understood as reference values only. Should there be additional questions do not hesitate to ask for an application note or contact our design team.

\*\*)  $\Delta f_c(\text{Hz}) = TC_f(\text{ppm/K}) \times (T-T_A) \times f_{CTA}(\text{MHz})$



**Generated:**

**Checked / Approved:**

Tele Filter GmbH  
 Potsdamer Straße 18  
 D 14 513 TELTOW / Germany  
 Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30  
 E-Mail: [tft@telefilter.com](mailto:tft@telefilter.com)




VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

**Filter characteristic**

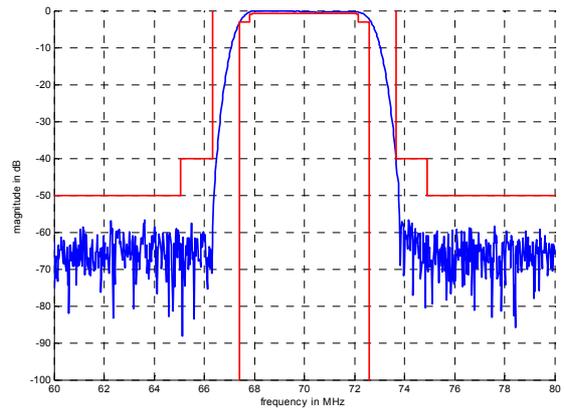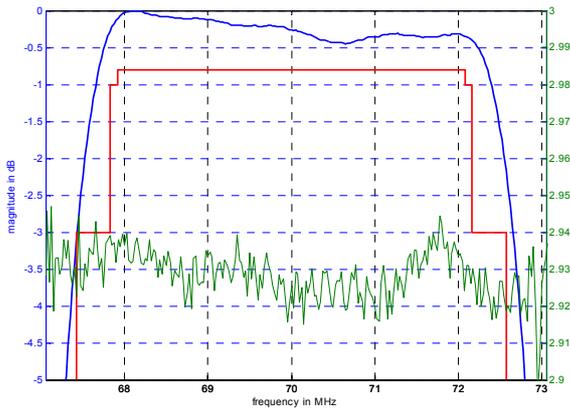

**Construction and pin connection**

(All dimensions in mm)

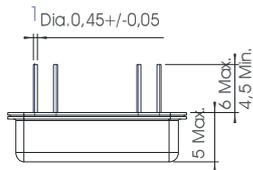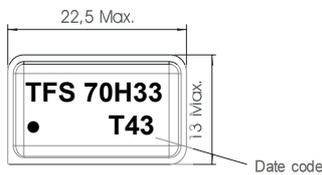


- 1 Input RF Return
- 2 Ground
- 7 Output RF Return
- 8 Output
- 9 Ground
- 14 Input

Date code: Year + week

- T 2005
- U 2006
- V 2007
- ...

**50 Ω Test circuit**

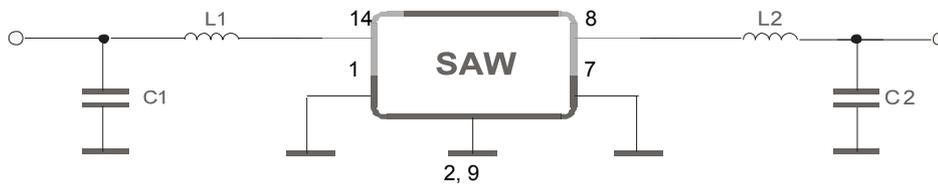

**Tele Filter GmbH**  
**Potsdamer Straße 18**  
**D 14 513 TELTOW / Germany**  
**Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30**  
**E-Mail: [tft@telefilter.com](mailto:tft@telefilter.com)**

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

**VI TELEFILTER****Filter specification****TFS 70H33****3/5**

---

**Stability characteristics**

After the following tests the filter shall meet the whole specification:

1. Shock: 500g, 1 ms, half sine wave, 3 shocks each plane;  
DIN IEC 68 T2 - 27
2. Vibration: 10 Hz to 500 Hz, 0,35 mm or 5 g respectively, 1 octave per min, 10 cycles per plan, 3 plans;  
DIN IEC 68 T2 - 6
3. Change of temperature: -55 °C to 125°C / 30 min. each / 10 cycles  
DIN IEC 68 part 2 – 14 Test N
4. Resistance to solder heat (reflow): reflow possible: twice max.;  
for temperature conditions refer to the attached "Air reflow temperature conditions" on page 4;

---


**Tele Filter GmbH**  
**Potsdamer Straße 18**  
**D 14 513 TELTOW / Germany**  
**Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30**  
**E-Mail: [tft@telefilter.com](mailto:tft@telefilter.com)**

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

**Air reflow temperature conditions**

| Conditions                                 | Exposure                    |
|--|-----------------------------|
| Average ramp-up rate (30°C to 217°C)       | less than 3°C/second        |
| > 100°C                                    | between 300 and 600 seconds |
| > 150°C                                    | between 240 and 500 seconds |
| > 217°C                                    | between 30 and 150 seconds  |
| Peak temperature                           | max. 260°C                  |
| Time within 5°C of actual peak temperature | between 10 and 30 seconds   |
| Cool-down rate (Peak to 50°C)              | less than 6°C/second        |
| Time from 30°C to Peak temperature         | no greater than 300 seconds |

**Chip-mount air reflow profile**

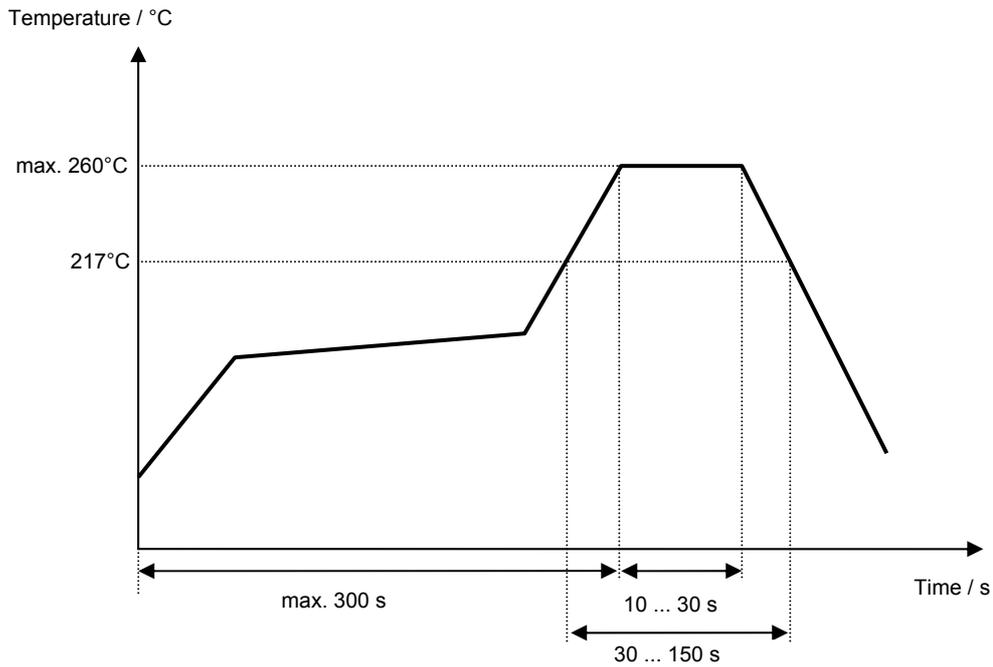

**Tele Filter GmbH**  
**Potsdamer Straße 18**  
**D 14 513 TELTOW / Germany**  
**Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30**  
**E-Mail: [tft@telefilter.com](mailto:tft@telefilter.com)**

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

**VI TELEFILTER****Filter specification****TFS 70H33****5/5****History**

| <b>Version</b> | <b>Reason of changes</b>      | <b>Name</b> | <b>Date</b> |
|----------------|-------------------------------|-------------|-------------|
| 1.0            | Generate filter specification | Dunzow W.   | 26.04.2002  |
| 1.1            | change temperature range      | Channaa     | 24.10.2005  |

---

**Tele Filter GmbH**  
**Potsdamer Straße 18**  
**D 14 513 TELTOW / Germany**  
**Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30**  
**E-Mail: [tft@telefilter.com](mailto:tft@telefilter.com)**

---

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.