

PRODUCT NO	POSITIONS	DIM. A	DIM. B	PLATING OPTIONS OVER CONTACT AREA
92082-X04	2 X 2	2,00/.079	3,92/.154	0 = 0,2u/8u" AU OBSOLETE
-X06	2 X 3	4,00/.158	5,92/.233	1 = 0,76u/30u" AU
-X08	2 X 4	6,00/.236	7,92/.312	3 = 0,38u/15u" AU
-X10	2 X 5	8,00/.315	9,92/.391	
-X12	2 X 6	10,00/.394	11,92/.469	
-X14	2 X 7	12,00/.472	13,92/.548	
-X16	2 X 8	14,00/.551	15,92/.627	
-X18	2 X 9	16,00/.630	17,92/.706	
-X20	2 X 10	18,00/.709	19,92/.784	
-X22	2 X 11	20,00/.787	21,92/.863	
-X24	2 X 12	22,00/.866	23,92/.942	
-X26	2 X 13	24,00/.945	25,92/1,020	
-X28	2 X 14	26,00/1,024	27,92/1,099	
-X30	2 X 15	28,00/1,102	29,92/1,178	

NOTES :

- HOUSING MAT'L : HIGH TEMP PLASTIC.
- TERMINAL MAT'L : BeCu.
- TERMINAL RETENTION 0,5 Kg/1,1 Lbs.
- SOLDER TAILS ARE TIN/LEAD PLATED.
- 'V' CUT OPTIONAL - MANUFACTURING PROCESS OPTION.
- PRODUCT DESCRIPTION CODE :

XXXXX-X XX

TOTAL POSITIONS
 PLATING
 BASE NUMBER

7 PACKAGING :



- XXXXX-XXX --- STD PACKAGING IN TUBE.
- XXXXX-XXXTR --- TAPE AND REEL (CONDUCTIVE)
PACKAGING WITH PICK-UP CAP (SEE FIG 1).
- XXXXX-XXXTRN --- TAPE AND REEL (CONDUCTIVE)
PACKAGING WITHOUT PICK-UP CAP.
- XXXXX-XXXCR --- TAPE AND REEL (NON-CONDUCTIVE)
PACKAGING WITH PICK-UP CAP (SEE FIG 1).
- XXXXX-XXXCRN --- TAPE AND REEL (NON-CONDUCTIVE)
PACKAGING WITHOUT PICK-UP CAP.

PICK-UP CAP







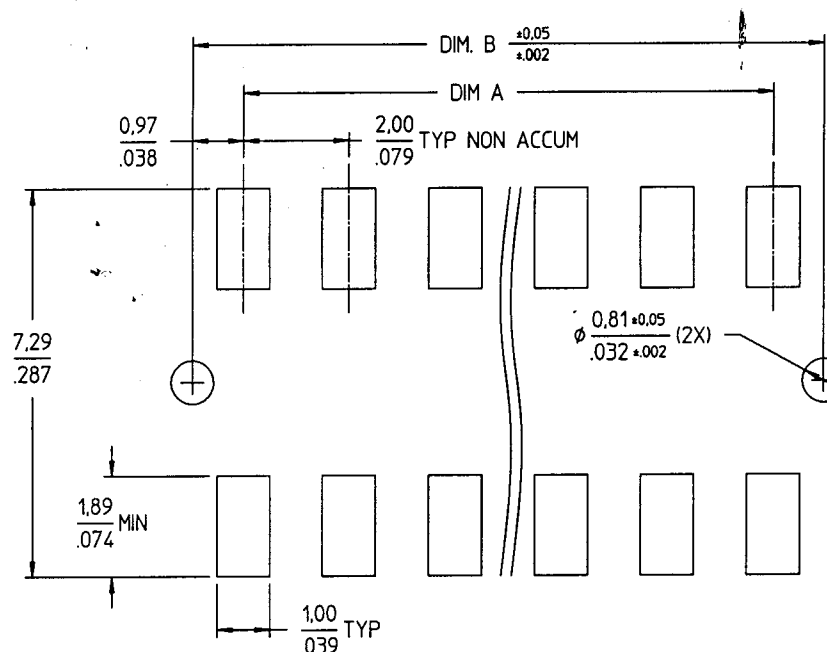

FIG. 1

NOTE 7 (b) & (d)



RECOMMENDED PAD LAYOUT

GEN. TOLERANCES		DO NOT SCALE DWG.		
X,X±0,3/XX±0,01 X,XX±0,13/XXX±0,005 X,XXX±0,051/XXXX±0,0020 ANGLES = ±2°		 MM INCH		
				DESCRIPTION LOW PROFILE VCC SMT 2,3 TOP ENTRY ASSY WITH 0,30/.012 LOCATING FEATURES
	NAME	DATE		
DRAWN	BS LOW	14MAY98		
CHECKED		15 May 98		
APPROVED		15 May 98		
				PRODUCT NO. 92082
				SCALE SHT 2 OF 2

CUSTOMER COPY