
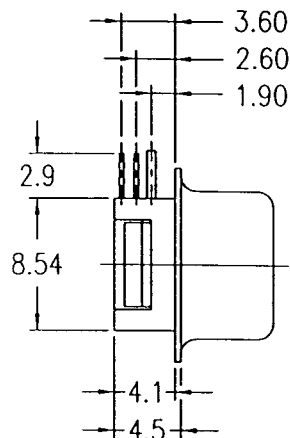
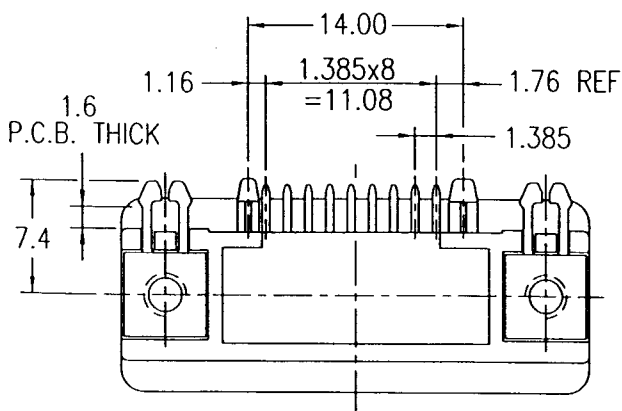
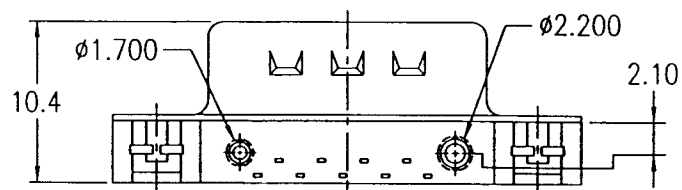


All rights strictly reserved. Reproduction or issue to third parties in any form without written authority from the proprietor. Property of C. BERG ELECTRONICS. Copyright BERG ELECTRONICS by

PRODUCT NO.

73712-XXXXXX

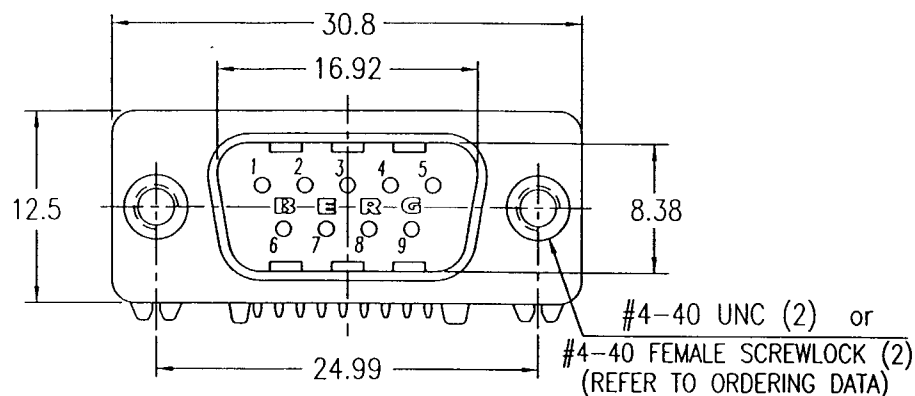

ORDERING DATA

73712-X X X X 09

- NO. OF CONTACT
- SHELL PLATING / PACKAGING
 - 0 - NICKEL PLATING / TRAY
 - 2 - NICKEL PLATING / TUBE
- INSULATOR
 - 0 - PBT MAT'L, BLACK
 - 5 - PCT MAT'L, BLACK
- FEMALE SCREWLOCK
 - 0 - WITHOUT SCREWLOCK
 - 1 - WITH #4-40 SCREWLOCKS (UNASSEMBLED)
 - 2 - WITH #4-40 SCREWLOCKS (ASSEMBLED)
- CONTACT PLATING
 - 1 - 3u"Au
 - 2 - 10u"Au
 - 4 - 30u"Au

mat'l code					tolerance unless otherwise specified		CUSTOMER COPY		BERG ELECTRONICS				
rev	ecn no.	dr	date		linear	0.0±0.3		projection 	title SUPER SLIM D-SUB 9P R/A MALE				
A	T70362	JC	10/20/97			0.00±0.2							
						0.000±0.1							
					angles	± 2'		unit MM	product family D-SUB size dwg no. A3 73712				
					dr	J C LAI 10/9/97							
					enr	J C LAI 10/9/97							
					chr	C L CHEN 10/9/97							
					appd	C L CHEN 10/9/97		scale	sheet 1 OF 2				
sheet rev.	A	A											
sheet index	1	2											
		4					5						

Tous droits strictement réservés. Reproduction ou communication à des tiers sans autorisation écrite de BERG ELECTRONICS.
All rights strictly reserved. Reproduction or communication to third parties in any form without written authority from the proprietor.
Property of c BERG ELECTRONICS.
Copyright BERG ELECTRONICS by

PRODUCT NO.

73712-XXXXXX

NOTES :

1. MATERIAL :


- * INSULATORS- GLASS FIBER FILLED POLYESTER, UL 94V-0, BLACK.
- * CONTACTS- BRASS
- * METAL SHELL- LOW CARBON STEEL.
- * BOARDLOCKS- BRASS
- * THREADED INSERTS- BRASS
- * FEMALE SCREWLOCKS- BRASS

2. FINISH :


- * CONTACTS- SELECTIVE Au PLATING IN CONTACT AREA (SEE ORDERING DATA LEGEND) AND 100u" MIN. Sn/Pb ON SOLDER TAILS WITH AN OVERALL 50u" MIN. Ni UNDERPLATE.
- * METAL SHELL- NICKEL PLATING.
- * BOARDLOCKS- Sn/Pb OVER Ni UNDERPLATE.
- * THREADED INSERTS- NICKEL PLATING.
- * FEMALE SCREWLOCKS- NICKEL PLATING.

3. PRODUCT SPECIFICATION PER GES-12-019.

4. PACKAGING SPECIFICATION PER GES-14-399.

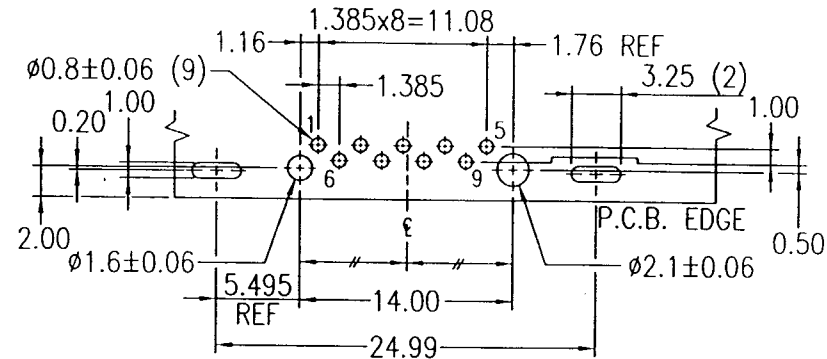

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)

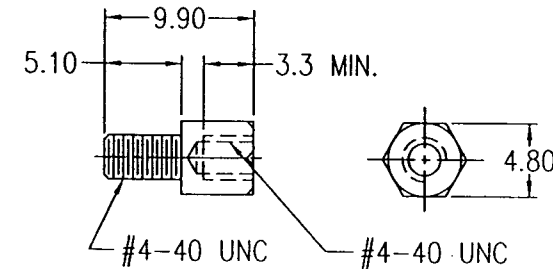

FEMALE SCREWLOCK
(SEE ORDERING DATA LEGEND)

mat'l code				tolerance unless otherwise specified		CUSTOMER COPY		BERG ELECTRONICS	
rev	ecn no.	dr	date	linear	0.0±0.3	projection	title	SUPER SLIM D-SUB 9P R/A MALE	
A	T70362	JC	10/20/97	0.00±0.2	0.000±0.1	MM	product family	D-SUB	code
				angles	± 2°	scale	size	dwg no.	TWN
				dr	J C LAI	10/9/97	A3	73712	sheet
				engr	J C LAI	10/9/97			2 OF 2
				chr	C L CHEN	10/9/97			
				appd	C L CHEN	10/9/97			
sheet	rev.	SEE SHEET 1							
sheet	index	1	2						