


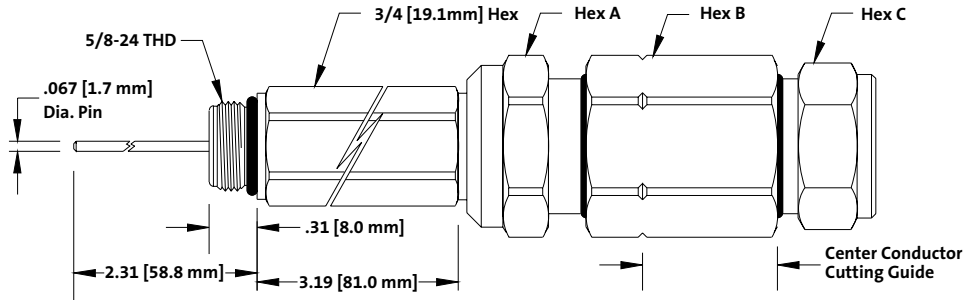

Note: The part numbers listed are for the 3" extension length. Extensions are also available in 6" and 9" length. To order the 6" and 9" extension length follow the example shown below:

Example:
GRS-500-EXT-6-DU-03-T
GRS-500-EXT-9-DU-03-T

CommScope P-3 Times Fiber T-10

Cable Series	Part Number	Center Conductor	Outer Conductor	Body Hex (A)	Main Nut Hex (B)	Back Nut Hex (C)
.412**	GRS-412-EXT-DU-01-T	.092	.412	15/16	1	15/16
.500	GRS-500-EXT-DU-03-T	.109	.500	1-1/8	1-1/8	1
.625	GRS-625-EXT-DU-02-T	.137	.625	1-1/4	1-1/4	1-1/8
.750	GRS-750-EXT-DU-01-T	.167	.750	1-3/8	1-3/8	1-1/4
.875	GRS-875-EXT-DU-02-T	.194	.875	1-3/8	1-3/8	1-3/8
1.000**	GRS-1000-EXT-DU-01-T	.220	1.000	1-3/8	1-5/8, 1-1/2 flats	1-1/2

CommScope QR

.320 (7C)**	GRS-320-EXT-QR-T	.071	.320	15/16	1	1
.540	GRS-540-EXT-QRP-T***	.124	.540	1-1/4	1-1/4	1-1/4
.715	GRS-715-EXT-QRP-T***	.166	.715	1-5/16	1-5/16	1-5/16
.860	GRS-860-EXT-QRP-T***	.203	.860	1-7/16	1-1/2	1-1/2
1.125**	GRS-1125-EXT-QR-T	.263	1.125	Requires 2 Hook Type Spanner Wrenches (P/N SW-2)		

Times Fiber TX-10

.565	GRS-565-EXT-TX-T	.129	.565	1-1/4	1-1/4	1-1/8
.700	GRS-700-EXT-TX-T	.165	.700	1-5/16	1-5/16	1-5/16
.840	GRS-840-EXT-TX-T	.194	.840	1-3/8	1-1/2	1-1/2
1.160**	GRS-1160-EXT-TX-T	.269	1.160	Requires 2 Hook Type Spanner Wrenches (P/N SW-2)		

Trilogy MC2

.440**	GRS-440-EXT-MC2-T	.105	.450	1-1/8	1-1/8	1
.500	GRS-500-EXT-MC2-T	.123	.510	1-1/8	1-1/8	1
.650	GRS-650-EXT-MC2-T	.156	.640	1-5/16	1-5/16	1-5/16
.750	GRS-750-EXT-MC2-T	.185	.760	1-3/8	1-3/8	1-1/4
1.000**	GRS-1000-EXT-MC2-T	.248	1.015	1-1/2	1-3/4, 1-5/8 flats	1-1/2

Early Generations See Cable Group Listings in Reference Section of this Catalog

.412 Group A**	GRS-412-EXT-A-01-T	.080	.412	13/16	1	15/16
.412 Group CX**	GRS-412-EXT-CX-T	.080	.482*	15/16	1-1/8	1
.500 Group C**	GRS-500-EXT-A-01-T	.100	.500	15/16	1-1/8	1
.500 Group D	GRS-500-EXT-DU-01-T	.109	.500	1-1/8	1-1/8	1
.500 Group E**	GRS-500-EXT-DU-02-T	.109	.500	1-1/8	1-1/8	1
.500 Group CX**	GRS-500-EXT-CX-T	.110	.571*	1-1/8	1-1/4	1-1/8
.625 Group CX**	GRS-625-EXT-CX-T	.137	.693*	1-1/4	1-3/8	1-1/4
.750 Group G**	GRS-750-EXT-A-01-T	.148	.750	1-1/8	1-3/8	1-1/4
.750 Group H**	GRS-750-EXT-DU-03-T	.167	.750	1-3/8	1-3/8	1-1/4
.750 Group J**	GRS-750-EXT-FD-04-T	.176	.750	1-3/8	1-3/8	1-1/4
.750 Group CX**	GRS-750-EXT-CX-T	.169	.816*	1-3/8	1-1/2, 1-7/16 flats	1-1/4
.875 Group CX**	GRS-875-EXT-CX-T	.194	.947*	1-3/8	1-5/8, 1-1/2 flats	1-1/2
1.000 Group O**	GRS-1000-EXT-A-01-T	.193	1.000	1-3/8	1-5/8, 1-1/2 flats	1-1/2
1.000 Group N**	GRS-1000-EXT-FD-01-T	.236	1.000	1-1/2	1-3/4, 1-5/8 flats	1-1/2

*Indicates diameter over outer jacket

**Extension connector is assembled from a pin type connector and a socket contact extension adapter

***Incorporates a non-metallic support sleeve