



REV A January 2011

Oscilent Controlled Document

Ordering Code / Part Number	Product Description
813-SL122.5M-20A	122.50MHz IF SAW Filter 20.88MHz Bandwidth

Specification Contents

- o Mechanical Dimensions
- o Test Circuit
- o Maximum Ratings
- o Electrical Specification
- o Frequency Response
- o Smith Chart
- o VSWR


Notes

- o Electrostatic Sensitive Device (ESD) 
- o Avoid excessive ultrasonic exposure
- o Solderability compatible with JEDEC J-STD-020C Pb-free process, 260°C peak reflow temperature
- o This product complies with EU directive 2002/95/EC (RoHS compliance)






Mechanical Dimensions (mm)

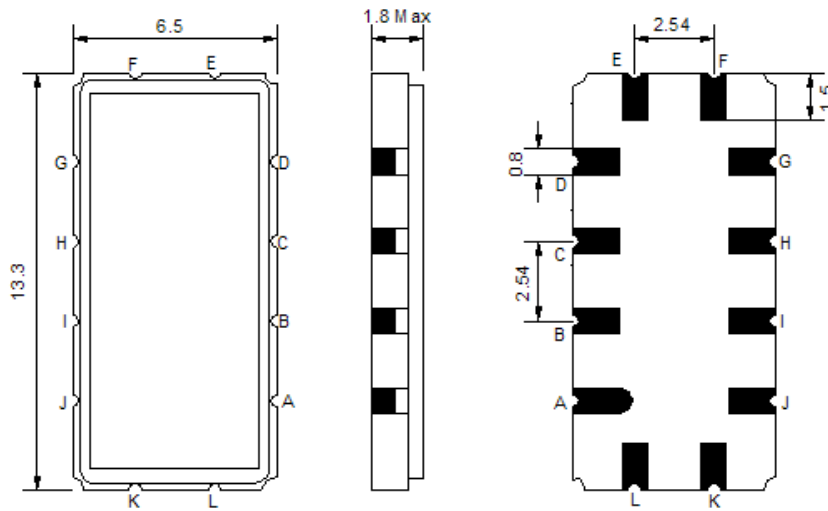

Pin Description	
A, B, C, D, F, G, H, I, J, L	Ground
K	Input
E	Output

Test Circuit

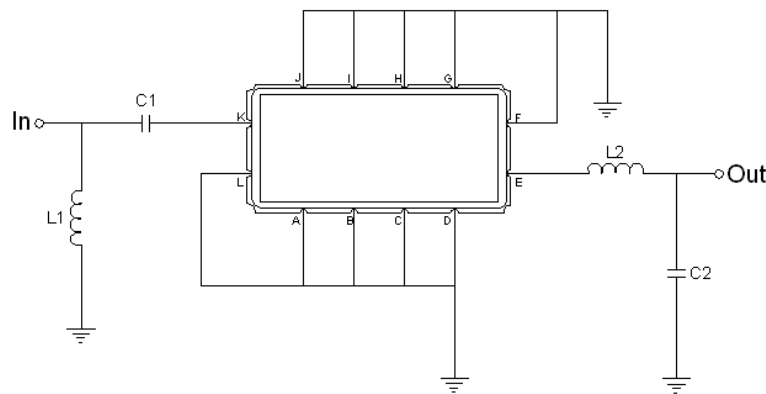

Test Fixture & Values	
Input	L1 = 27 nH, C1 = 100 pF
Output	L2 = 22 nH, C2 = 56 pF
Source/Load Impedance	50 Ω

**Maximum Ratings**

Parameters Description	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-20	-	70
Storage Temperature Range	°C	-40	-	85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-

Notes: With Matching Network (Ref. Testing Environment Circuit as shown above).

Those impedances could be modified with different impedance values and/or structures, if necessary.


Electrical Specification

Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	122.50	-
Insertion Loss at Fo	dB	-	14.50	16.00
Group Delay Variation at Fo±9.52MHz	ns	-	22	50
Absolute Delay Time at Fo	us	-	1.01	-
Amplitude Ripple at Fo±9.52MHz	dB	-	0.32	0.80
Bandwidth at -1dB	MHz	20.50	20.88	-
Bandwidth at -3dB	MHz	21.30	21.53	-
Bandwidth at -40dB	MHz	-	24.26	24.50
Relative Attenuation				
Lower Sidelobe	dB	40	48	-
Upper Sidelobe	dB	40	48	-
Temperature Coefficient	ppm/°C	-	-86	-




Frequency Response

Bandwidth at -1.0 dB

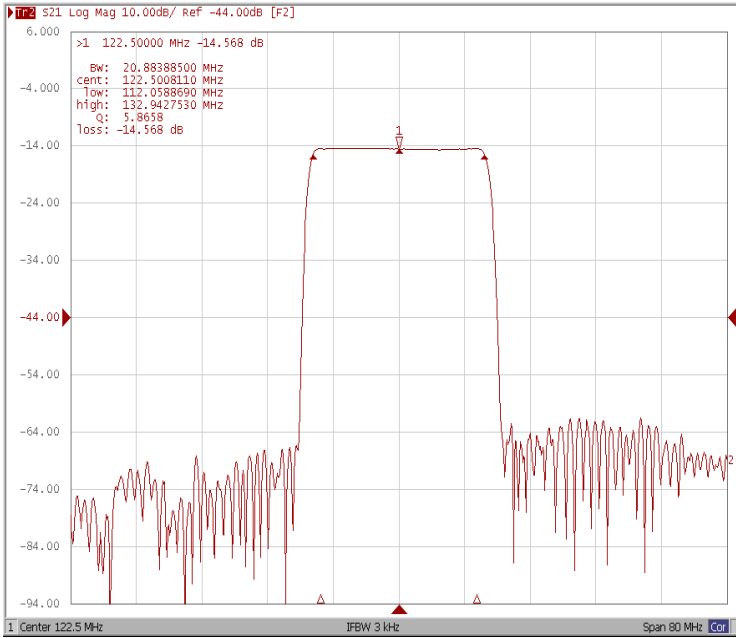


Bandwidth at -3.0 dB

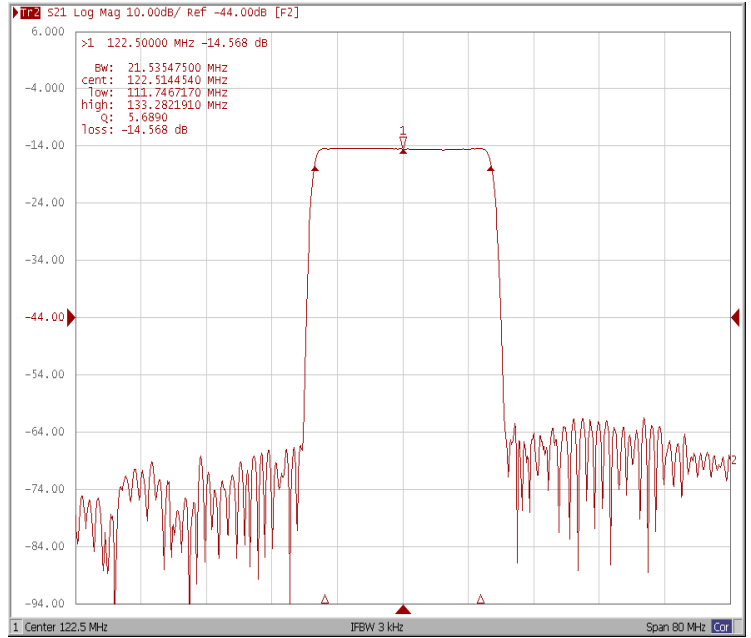

Bandwidth at -10.0 dB




Bandwidth at -40.0 dB

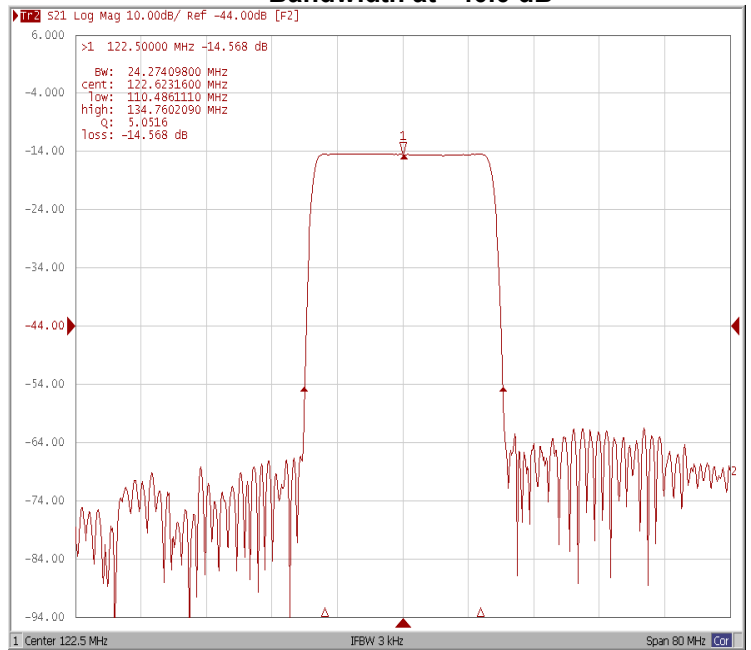





Ripple Variation at $F_o \pm 9.52\text{MHz}$

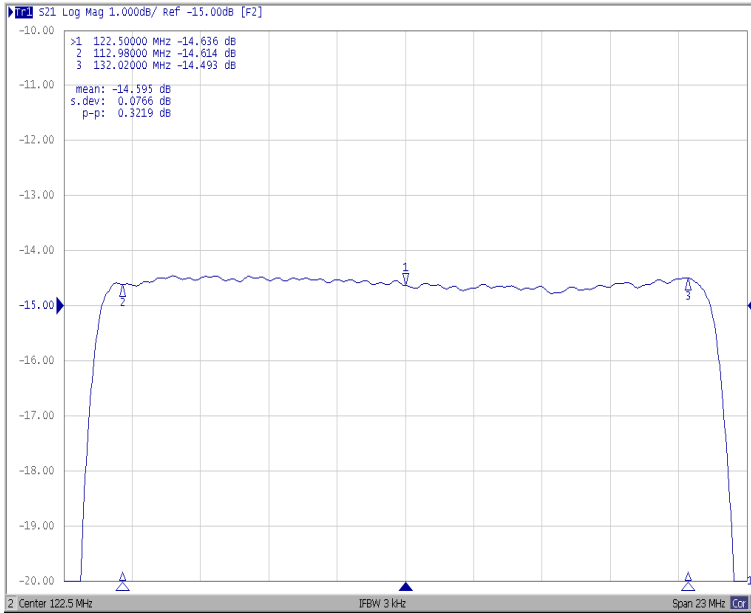

Group Delay Variation at $F_o \pm 9.52\text{MHz}$

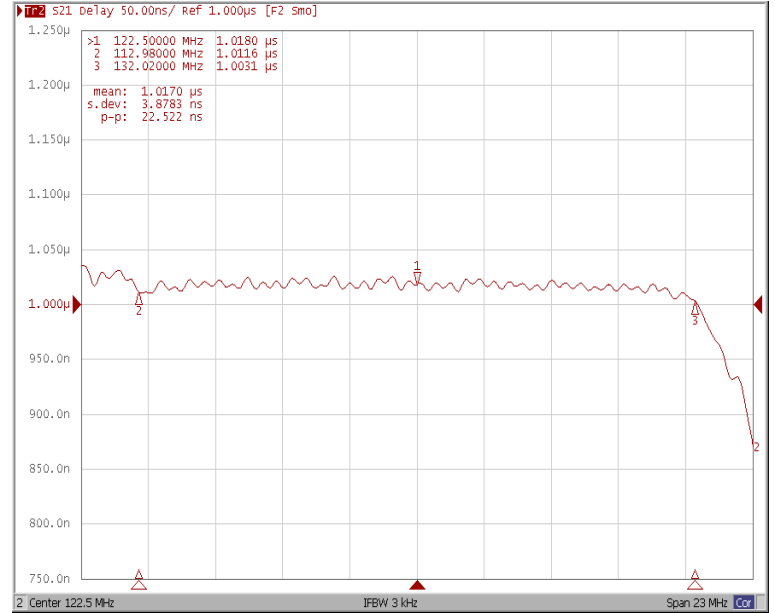

Smith Chart

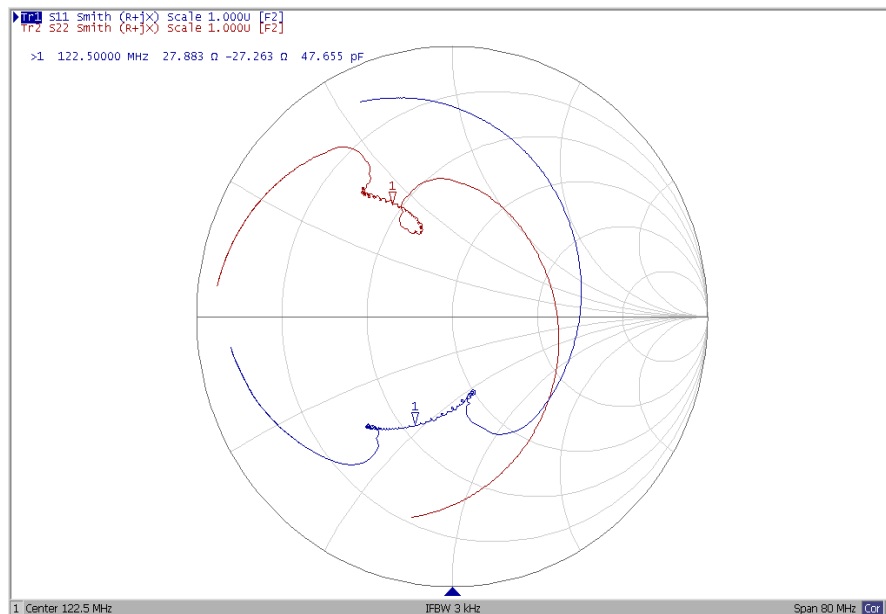



VSWR

