




Stecklänge / mating length




E = early mate, late break / voreilend
 S = standard
 L = late mate, early break / nacheilend

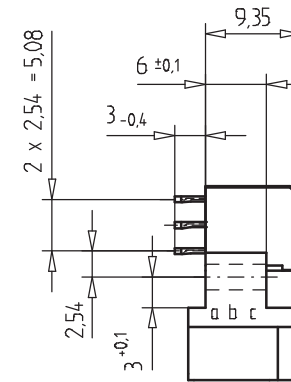

Bestückungsplan / contact layout

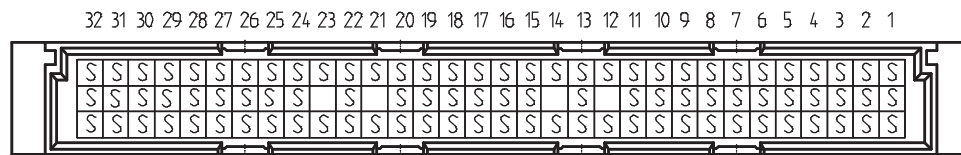

Leiterplatten-Lochbild / PCB drillhole pattern

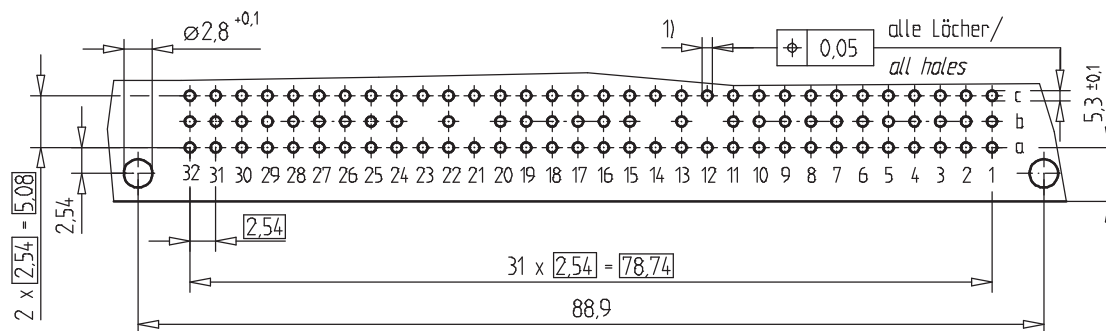

Elastische Einpresszone 1,5 mm / compliant pressfit zone 1,5 mm

Isolierwerkstoff / housing material : PBT GF30

Bauart 3 / type 3

Anforderungsstufe 2 = 400 Steckzyklen / performance class 2 = 400 mating cycles

Fehlende Masse und Angaben nach IEC 60 603-2 / DIN EN 60 603-2

Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2

Schichtaufbau im metallisierten Loch siehe Zeichnung 164062 / Nr.6

diameter of drilled hole see drawing 164062 / No.6

- 1) $\varnothing 1,0 \pm 0,06$ Durchmesser des metallisierten Loches
 $\varnothing 1,0 \pm 0,06$ Diameter of finished plated-through hole

Information: mit Presssteil / with pressed-in cover Reihe b 12, 14, 21, 23 nicht bestückt / raw b 12, 14, 21, 23 not assembled	Tolerances	Scale 2:1
	All Dimensions in mm	
All rights reserved. Only for information. To insure that this is the latest version of this drawing, please contact one of the ERNI companies before using.	Subject to modification without prior notice. Drawing will not be updated.	Designation
	ERNI www.ERNI.com	Messerleiste C 92 EE Male Connector C 92 Pressfit
Index	Date	100200070001
V:00065412.SZA		STVC