


GENERAL PURPOSE APPLICATION.

### FEATURES

- Good Linearity of  $h_{FE}$ .
- Complementary to KTD2060.

### MAXIMUM RATING (Ta=25 °C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	$V_{CBO}$	-80	V
Collector-Emitter Voltage	$V_{CEO}$	-80	V
Emitter-Base Voltage	$V_{EBO}$	-5	V
Collector Current	$I_C$	-4	A
Base Current	$I_B$	-0.4	A
Collector Power Dissipation (Tc=25 °C)	$P_C$	25	W
Junction Temperature	$T_j$	150	°C
Storage Temperature Range	$T_{stg}$	-55 ~ 150	°C

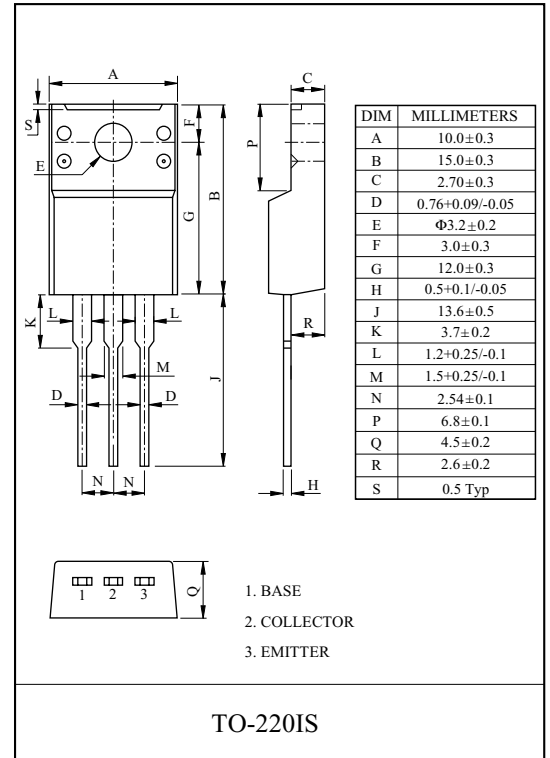

### ELECTRICAL CHARACTERISTICS (Ta=25 °C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	$I_{CBO}$	$V_{CB}=-80V, I_E=0$	-	-	-30	μA
Emitter Cut-off Current	$I_{EBO}$	$V_{EB}=-5V, I_C=0$	-	-	-100	μA
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C=-50mA, I_B=0$	-80	-	-	V
DC Current Gain	$h_{FE(1)}$ (Note)	$V_{CE}=-5V, I_C=-0.5A$	40	-	240	
	$h_{FE(2)}$	$V_{CE}=-5V, I_C=-3A$	15	-	-	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=-3A, I_B=-0.3A$	-	-1.0	-1.7	V
Base-Emitter Voltage	$V_{BE}$	$V_{CE}=-5V, I_C=-3A$	-	-1.0	-1.5	V
Transition Frequency	$f_T$	$V_{CE}=-5V, I_C=-0.5A$	-	9.0	-	MHz
Collector Output Capacitance	$C_{ob}$	$V_{CB}=-10V, I_E=0, f=1MHz$	-	130	-	pF

Note :  $h_{FE(1)}$  Classification R:40~80, O:70~140, Y:120~240

# KTB1368

