


## Wirewound Resistors

# Fusible & Flame-Proof Type

## Normal & Miniature Style [ FKN Series ]

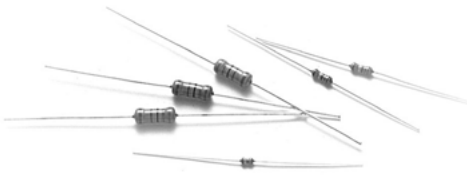

### INTRODUCTION


The resistor element is a resistive wire which is wound in a single layer on a ceramic rod, with tinned connecting wires of electrolytic copper welded to the end-caps. The ends of the resistive wire are connected to the caps by welding. The resistors are coated with layers of green color flame-proof lacquer. Overload protection without risk of fire. Wide range of overload currents.

### FEATURES

Power Rating	1/2W, 1W, 2W, 3W, 4W, 5W, 7W
Resistance Tolerance	±1%, ±5%
T.C.R.	±350ppm/°C
Flameproof Multi-layer Coating Meets	UL-94V-0
Flameproof Feature Meets Overload Test	UL-1412

### DERATING CURVE

For resistors operated in ambient temperatures above 40°C, power rating must be derated in accordance with the curve below.

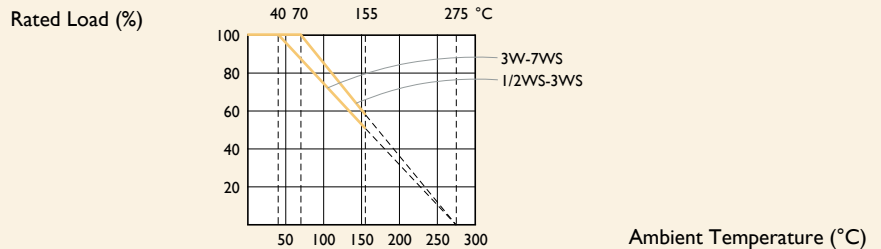

### FUSING CHARACTERISTICS


$R \leq 2.0\Omega$  Fusing time within 60 seconds at 36 times of rated power

$R > 2.0\Omega$  Fusing time within 60 seconds at 25 times of rated power

Fusing residual resistive value at least 100 times rated resistance

### DIMENSIONS

Unit: mm



5th color code: white

STYLE	DIMENSION					
	Normal	Miniature	L	øD	H	ød
-		FKN50S	6.3±0.5	2.5±0.3	28±2.0	0.55±0.05
FKN-50		FKN1WS	9.0±0.5	3.5±0.3	26±2.0	0.55±0.05
FKN100		FKN2WS	11.5±1.0	4.6±0.5	35±2.0	0.8±0.05
FKN200		FKN3WS	15.5±1.0	5.2±0.5	33±2.0	0.8±0.05
FKN300						
FKN400		FKN5WS	17.5±1.0	6.5±0.5	32±2.0	0.8±0.05
FKN500		FKN7WS	24.5±1.0	8.5±0.5	38±2.0	0.8±0.05

Note: FKN1WS ( for MBType ) ød = 0.8±0.05 mm

## ELECTRICAL CHARACTERISTICS

### NORMAL STYLE

STYLE	FKN-50	FKN100	FKN200	FKN300	FKN400	FKN500
Power Rating at 40°C				3W	4W	5W
Power Rating at 70°C	1/2W	1W	2W			
Maximum working voltage	$\sqrt{P \times R}$					
Voltage Proof on Insulation	300V					
Resistance Range ( $\pm 1\%$ )		0.5 $\Omega$ - 100 $\Omega$	0.47 $\Omega$ - 150 $\Omega$	0.56 $\Omega$ - 330 $\Omega$		1 $\Omega$ - 620 $\Omega$
Resistance Range ( $\pm 5\%$ )	0.5 $\Omega$ - 47 $\Omega$	0.5 $\Omega$ - 100 $\Omega$	0.47 $\Omega$ - 150 $\Omega$	0.56 $\Omega$ - 330 $\Omega$		1 $\Omega$ - 620 $\Omega$
Operating Temp. Range	-40°C to +155°C					
Temperature Coefficient	$\pm 350$ ppm/°C					

Note: Special value is available on request

### MINIATURE STYLE

STYLE	FKN50S	FKN1WS	FKN2WS	FKN3WS	FKN5WS	FKN7WS
Power Rating at 40°C					5W	7W
Power Rating at 70°C	1/2W	1W	2W	3W		
Maximum working voltage	$\sqrt{P \times R}$					
Voltage Proof on Insulation	200V	300V				
Resistance Range ( $\pm 1\%$ )		0.47 $\Omega$ - 62 $\Omega$	0.47 $\Omega$ - 150 $\Omega$	0.47 $\Omega$ - 240 $\Omega$	0.56 $\Omega$ - 330 $\Omega$	1 $\Omega$ - 620 $\Omega$
Resistance Range ( $\pm 5\%$ )	2.5 $\Omega$ - 22 $\Omega$	0.47 $\Omega$ - 62 $\Omega$	0.47 $\Omega$ - 150 $\Omega$	0.47 $\Omega$ - 240 $\Omega$	0.56 $\Omega$ - 330 $\Omega$	1 $\Omega$ - 620 $\Omega$
Operating Temp. Range	-40°C to +155°C					
Temperature Coefficient	$\pm 350$ ppm/°C					

Note: Special value is available on request

## ENVIRONMENTAL CHARACTERISTICS

PERFORMANCE TEST	TEST METHOD		APPRAISE
Short Time Overload	IEC 60115-1 4.13	10 times rated power for 5 Sec.	$\pm 2.0\% + 0.05\Omega$
Voltage Proof on Insulation	IEC 60115-1 4.7	in V-block for 60 Sec., test voltage by type	By type
Temperature Coefficient	IEC 60115-1 4.8	-55°C to +155°C	By type
Insulation Resistance	IEC 60115-1 4.6	in V-block for 60 Sec.	>100M $\Omega$
Solderability	IEC 60115-1 4.17	235 $\pm 5$ °C for 3 $\pm 0.5$ Sec.	95% Min. coverage
Solvent Resistance of Marking	IEC 60115-1 4.30	IPA for 5 $\pm 0.5$ Min. with ultrasonic	No deterioration of coatings and markings
Robustness of Terminations	IEC 60115-1 4.16	Direct load for 10 Sec. in the direction of the terminal leads	$\geq 2.5$ kg (24.5N)
Damp Heat Steady State	IEC 60115-1 4.24	40 $\pm 2$ °C, 90-95% RH for 56 days, loaded with 0.1 times RCWV	$\pm 5.0\% + 0.05\Omega$
Endurance at 70°C	IEC 60115-1 4.25	70 $\pm 2$ °C at RCWV for 1,000 Hr. (1.5 Hr. on, 0.5 Hr. off)	$\pm 5.0\% + 0.05\Omega$
Temperature Cycling	IEC 60115-1 4.19	-55°C $\Rightarrow$ Room Temp. $\Rightarrow$ +155°C $\Rightarrow$ Room Temp. (5 cycles)	$\pm 1.0\% + 0.05\Omega$
Resistance to Soldering Heat	IEC 60115-1 4.18	260 $\pm 3$ °C for 10 $\pm 1$ Sec., immersed to a point 3 $\pm 0.5$ mm from the body	$\pm 1.0\% + 0.05\Omega$
Accidental Overload Test	IEC 60115-1 4.26	4 times RCWV for 1 Min.	No evidence of flaming or arcing

Note: Rated Continuous Working Voltage (RCWV) =  $\sqrt{\text{Power Rating} \times \text{Resistance Value}}$  or Max. working voltage listed above, whichever less.