



HDSpider™ Short Range Cat.5 HDMI Receiver



HVE-9900

H/W Version: 2

What is HDMI?

The High-Definition Multimedia Interface (HDMI) is a revolutionary technology that allows viewers to experience the highest quality digital images available. It is able to deliver top-quality video as well as audio over a single cable.

This growing technology is great for displays in many different situations: movie theatres, concert halls, public transportation, malls, shops, airports, schools, etc.

Is HDMI 1.3 backward compatible with prior releases of the HDMI and DVI spec.?

HDMI 1.3 supports the demands of future high definition display devices, such as higher resolutions, high frame rates and Deep Color. Fully backward compatible with all prior releases of the HDMI spec, as well as DVI compliant devices.

What Products or applications will take advantage of new HDMI 1.3 capabilities?

New high-definition DVD formats (HD-DVD and Blu-

Ray) and game machines (PS3 and X-Box) will make use of capabilities added in HDMI 1.3. Digital television will be able to present images that are closer to real life than previously has been possible.

Introducing the HDSpider™ Series from LevelOne

The HDSpider™ Series is a collection of HDMI Cat.5 senders and receivers, offering a full range of HDMI extender solutions. Choose from our 7 different HDSpider extenders to build a flexible network to send your high-quality HDMI signals to greater distances, and at a reduced cost.

What does a Cat.5 receiver do?

This compact and simple to use device is deployed on the receiving end, where the HD monitor is located. Using Cat.5 cable to send the HDMI signal is the best way to reach extended distances and HVE-9900 also has a built-in equalization knob to help you fine tune your HD network.

To see this device in action, please see the diagram below.



1. RJ-45 Port
2. HDMI Port

Key Features

- Connects directly to the monitor, no need to by extra HDMI cable
- Top quality transmission of Full HD (15m), regular HD (25m)
- No data loss
- Higher speed-6.75Gbps
- HDMI 1.3 Enables display with more natural and vivid colors
- HDMI 1.3c compliance(Full 3D support)

Works Well With



HVE-9004
HDSpider™ 4-Port Cat.5 HDMI Sender




HVE-9008
HDSpider™ 8-Port Cat.5 HDMI Sender

Technical Specifications

Type	HDMI Transmitter			HDMI Receiver	
Model No.	HVE-9001	HVE-9002	HVE-9003	HVE-9000	HVE-9900
Product Name	HDSpider™ Cat.5 HDMI Sender	HDSpider™ Cat.5 HDMI Sender with Local HDMI Output	HDSpider™ Cat.5 Cascadable HDMI Sender	HDSpider™ Long Range Cat.5 HDMI Receiver	HDSpider™ Cat.5 HDMI Short Range Receiver
HDMI Compliance	HDMI 1.3c (Full 3D support)				
HDCP Compliance	Yes				
Video bandwidth	Single-link 225MHz (6.75Gbps)				
RJ-45 Input	-	-	1	1	1
RJ-45 Output	1	1	1	-	-
HDMI Input	1	1	-	-	-
HDMI Output	-	1	1	1	1
Max Resolution	Full HD (1080p)-40m (130ft) thru Cat.5e HD (720p/1080i)-50m (165ft) thru Cat.5e		Full HD (1080p)-50m (165ft) thru Cat.6 HD (720p/1080i)-60m (200ft) thru Cat.6		Full HD (1080p)-15m (50ft) thru Cat.5e Full HD (1080p)-18m (65ft) thru Cat.6 HD (720p/1080i)-25m (80ft) thru Cat.5e HD (720p/1080i)-30m (100ft) thru Cat.6
Audio	7.1-channel surround sound or stereo digital audio				
DIP switch	-	2-pin DIP	-	-	-
Equalization	8-level digital control at RX				-
Input TMDS signal	.2 Volts (peak to peak)				-
Input DDC signal	5 Volts (peak-to-peak, TTL)				
Rotary control switch	Mode	None	Adjustable 8-level signal equalization	Signal level	-
ESD protection	1. Human body model- ±15KV		2. Core chipset- ±2KV		
Power supply	DC5V/2Am	5VDC/4Am		DC5V/2Am	-
Power Consumption	3 Watt (max)			1 Watt (max)	0.5 Watt (max)
Dimensions (L x W x H)	93 x 90 x 25 mm	108 x 210 x 27 mm		93 x 60 x 25 mm	45 x 25 x 20 mm
Rack-mount with ears	Yes	Yes		Yes	No
Weight	405g (0.89lbs)	525g (1.2lbs)	530g (1.2lbs)	405g (0.89lbs)	180g (1.3lbs)
Operating Temp.	0~40°C				
Storage Temp.	-20~60°C				
Humidity	20~90% Non-Condensing				

Product Diagram

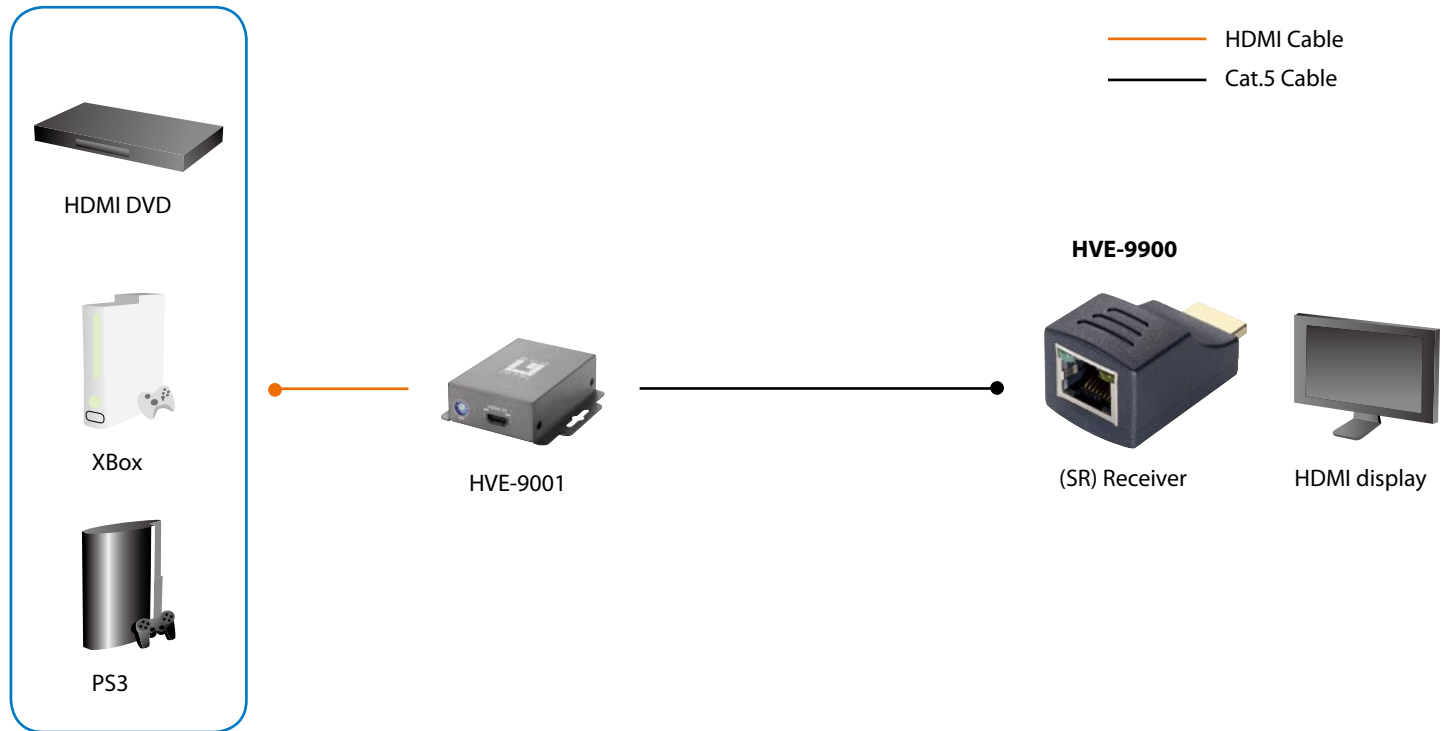

Order Information

Package Contents

HVE-9900: HDSpider™ Short Range Cat.5 HDMI Receiver

HVE-9900 x 1

User Manual x 1