


MHQ0402PSA20NJT000^{New}
Product



Applications	Commercial Grade
Feature	<p>Multilayer Multilayer</p> <p>Non-Mag Core Non-Magnetic Core (Dielectric Ceramic)</p> <p>Super High Q Super High Q</p>
Series Type	MHQ-PSA
Status	Production
Brand	TDK

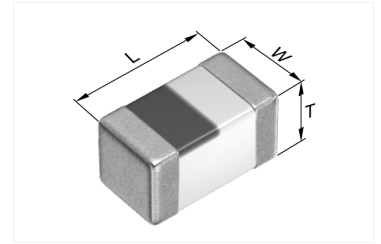

Size	
Length(L)	0.40mm ±0.02mm
Width(W)	0.20mm ±0.02mm
Thickness(T)	0.20mm ±0.02mm
Recommended Land Pattern (A)	0.15mm to 0.20mm
Recommended Land Pattern (B)	0.20mm Nom.
Recommended Land Pattern (C)	0.18mm to 0.20mm

Electrical Characteristics	
Inductance	20nH ±5% at 500MHz
Rated Current	110mA
DC Resistance [Typ.]	1.91Ω
DC Resistance [Max.]	2.4Ω
Self Resonant Frequency [Min.]	2.4GHz
Self Resonant Frequency [Typ.]	3.5GHz
Q [Min.]	8 at 500MHz
Q [Typ.]	12 at 500MHz




Other	
Operating Temp. Range (Including Self-Temp. Rise)	-55 to 125°C
Soldering Method	Reflow
AEC-Q200	No
Packing	Punched (Paper)Taping [180mm Reel]
Package Quantity	20000pcs
Weight	0.00007g

! Images are for reference only and show exemplary products.
! This PDF document was created based on the data listed on the TDK Corporation website.
! All specifications are subject to change without notice.

MHQ0402PSA20NJT000^{New}
Product



Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

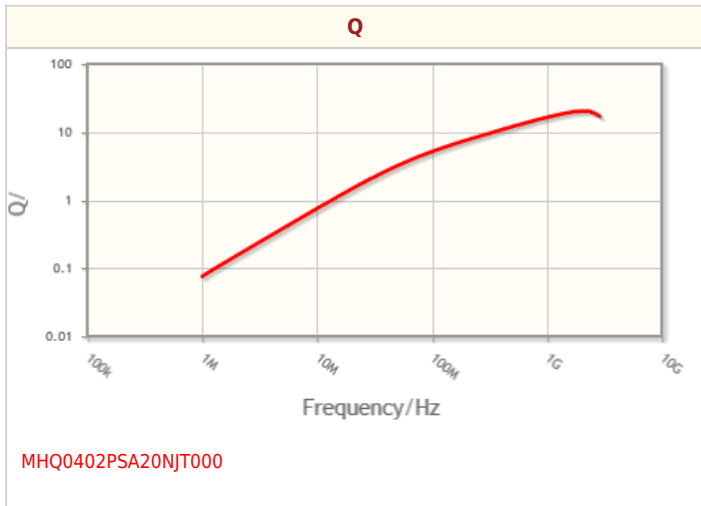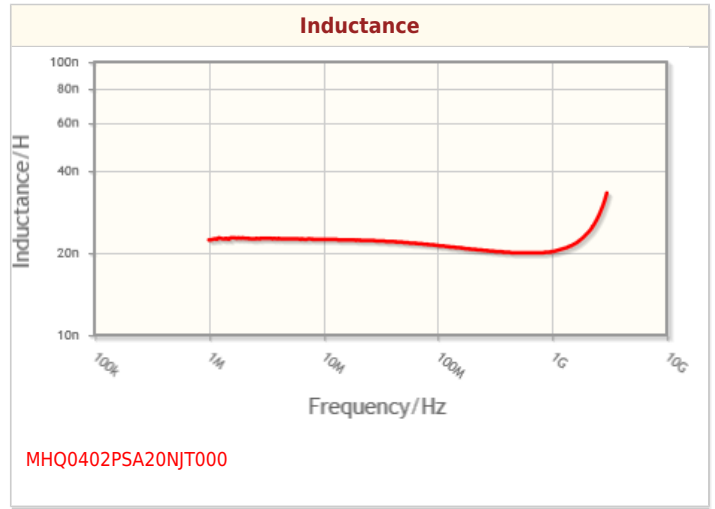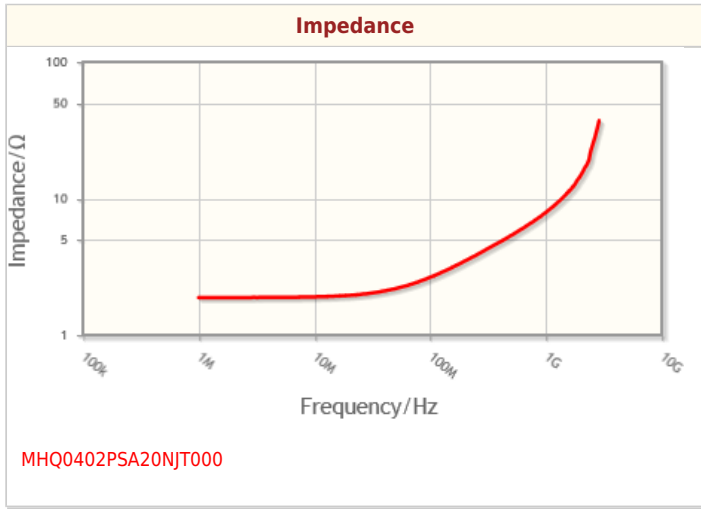


! Images are for reference only and show exemplary products.
! This PDF document was created based on the data listed on the TDK Corporation website.
! All specifications are subject to change without notice.

MHQ0402PSA20NJT000^{New}
Product



Associated Images

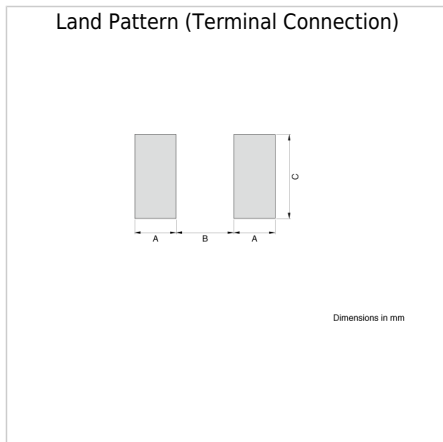

! Images are for reference only and show exemplary products.
! This PDF document was created based on the data listed on the TDK Corporation website.
! All specifications are subject to change without notice.