

TO-3P Plastic-Encapsulate Transistors


2SC5287 TRANSISTOR (NPN)

FEATURES

- High Breakdown Voltage
- High Speed Switching

APPLICATIONS

- For Switching Regulator and General Purpose Applications

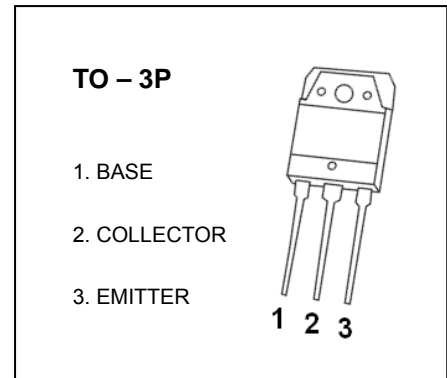

MAXIMUM RATINGS ($T_a=25^\circ\text{C}$ unless otherwise noted)


Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage	900	V
V_{CEO}	Collector-Emitter Voltage	550	V
V_{EBO}	Emitter-Base Voltage	7	V
I_C	Collector Current	5	A
P_C	Collector Power Dissipation $T_C=25^\circ\text{C}$	80	W
$R_{\theta JA}$	Thermal Resistance From Junction To Ambient	42	$^\circ\text{C}/\text{W}$
T_j	Junction Temperature	150	$^\circ\text{C}$
T_{stg}	Storage Temperature	-55~+150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C=1\text{mA}, I_E=0$	900			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}^*$	$I_C=10\text{mA}, I_B=0$	550			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E=1\text{mA}, I_C=0$	7			V
Collector cut-off current	I_{CBO}	$V_{CB}=800\text{V}, I_E=0$			100	μA
Emitter cut-off current	I_{EBO}	$V_{EB}=7\text{V}, I_C=0$			100	μA
DC current gain	h_{FE}^*	$V_{CE}=4\text{V}, I_C=1.8\text{A}$	10		25	
Collector-emitter saturation voltage	$V_{CE(sat)}^*$	$I_C=1.8\text{A}, I_B=0.36\text{A}$			0.5	V
Base-emitter saturation voltage	$V_{BE(sat)}^*$	$I_C=1.8\text{A}, I_B=0.36\text{A}$			1.2	V
Collector output capacitance	C_{ob}	$V_{CB}=10\text{V}, I_E=0, f=1\text{MHz}$		50		pF
Transition frequency	f_T	$V_{CE}=12\text{V}, I_C=0.35\text{A}$		6		MHz

*Pulse test

TO-3P Package Outline Dimensions

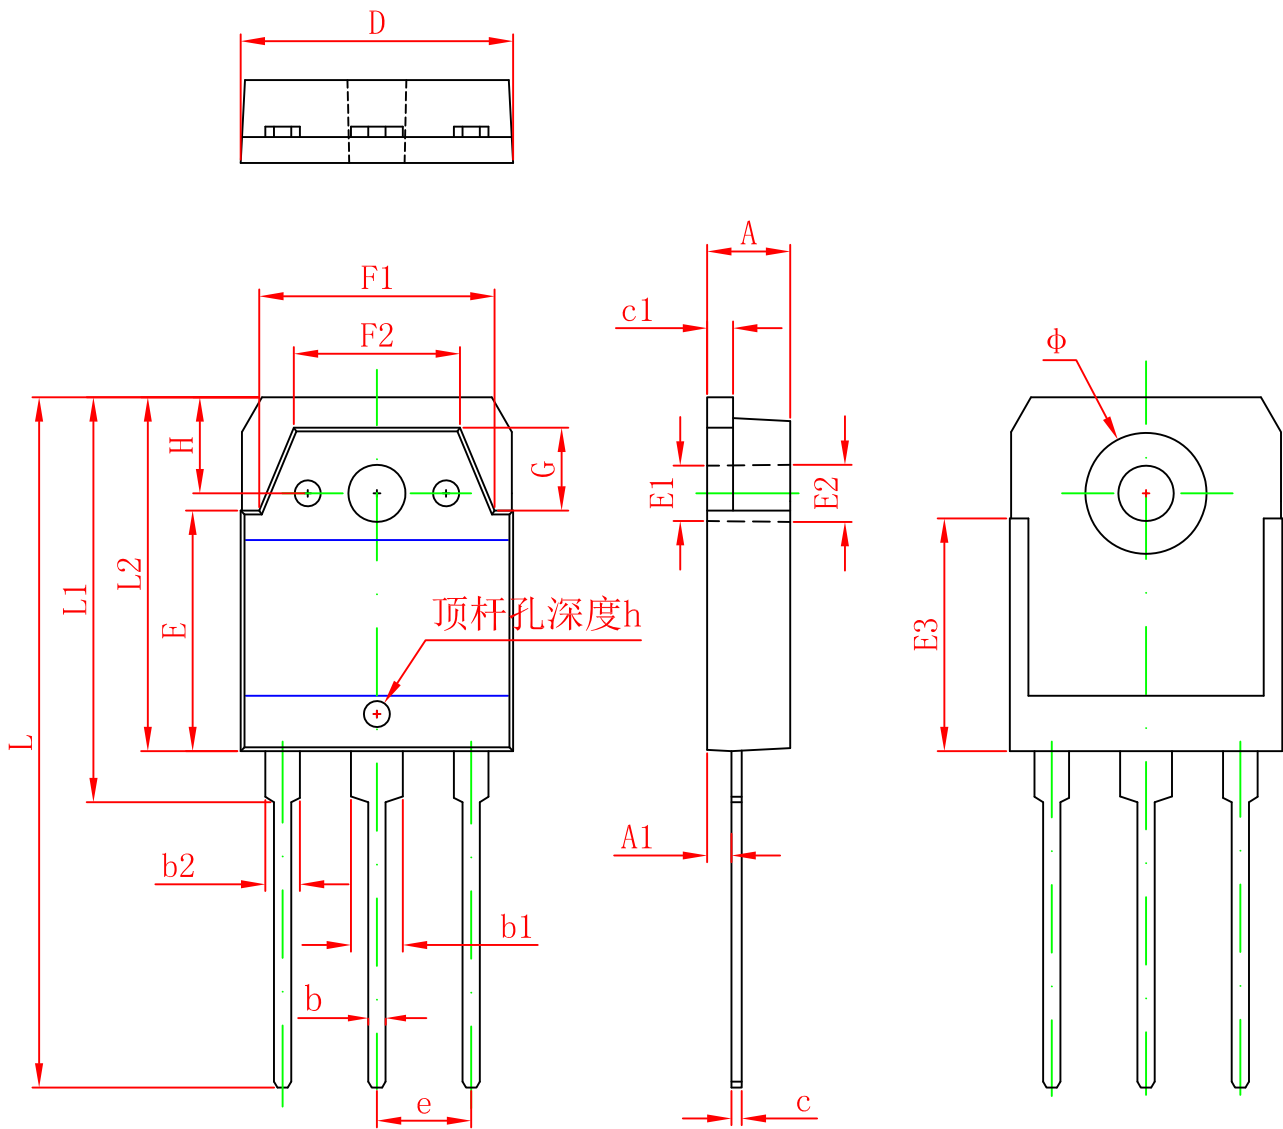

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	4.600	5.000	0.181	0.197
A1	1.200	1.600	0.047	0.063
b	0.800	1.200	0.031	0.047
b1	2.800	3.200	0.110	0.126
b2	1.800	2.200	0.071	0.087
c	0.500	0.700	0.020	0.028
c1	1.450	1.650	0.057	0.065
D	15.450	15.850	0.608	0.624
E	13.700	14.100	0.539	0.555
E1	3.200 REF		0.126 REF	
E2	3.300 REF		0.130 REF	
E3	13.450 REF		0.530 REF	
F1	13.400	13.800	0.528	0.543
F2	9.400	9.800	0.370	0.386
L	39.900	40.300	1.571	1.587
L1	23.200	23.600	0.913	0.929
L2	20.300	20.600	0.799	0.811
Φ	6.900	7.100	0.272	0.280
G	5.150	5.550	0.203	0.219
e	5.450 TYP		0.215 TYP	
H	5.000 REF		0.197 REF	
h	0.000	0.300	0.000	0.012