

# PRODUCT SPECIFICATION

DATE : 12/18/2012

<b>cosmo</b> ELECTRONICS CORPORATION	Photocoupler : <b>K1010 3W</b>	NO.62P00057 SHEET 1 OF 6	REV. 1
---	-----------------------------------	-----------------------------	-----------

## High Reliability Photocoupler

### ● Features

- 1.Low input current type ( $I_F=0.5\text{mA}$ ).
- 2.Current transfer ratio (CTR : 50~600% at  $I_F=0.5\text{mA}$   $V_{ce}=5\text{V}$ ).
- 3.High isolation voltage between input and output ( $V_{iso}:5000\text{VRms}$ ).
- 4.Compact long creepage distance type package.
- 5.Pb free and RoHS compliant.
- 6.Agency Approvals
  - UL UL1577 / CUL C22.2 No.1 & NTC No.5, File No. E169586
  - VDE EN60747, File No.101347
  - FIMKO EN60065, File No.FI23149
  - FIMKO EN60950, File No.FI24584
  - SEMKO EN60065, File No.1016484
  - SEMKO EN60950, File No.1016433
  - CQC GB4943 / GB8898, File No.CQC10001049555/CQC08001023986

### ● Application :


- 1.Computer terminals, programmable controllers.
- 2.Facsimile equipment, Audio, Video.
- 3.Communications, telephone, etc..

# PRODUCT SPECIFICATION


DATE : 12/18/2012

<b>cosmo</b> ELECTRONICS CORPORATION	Photocoupler : <b>K1010 3W</b>	NO.62P00057 SHEET 2 OF 6	REV. 1
---	-----------------------------------	-----------------------------	-----------

## 1. OUTSIDE DIMENSION : UNIT (mm)

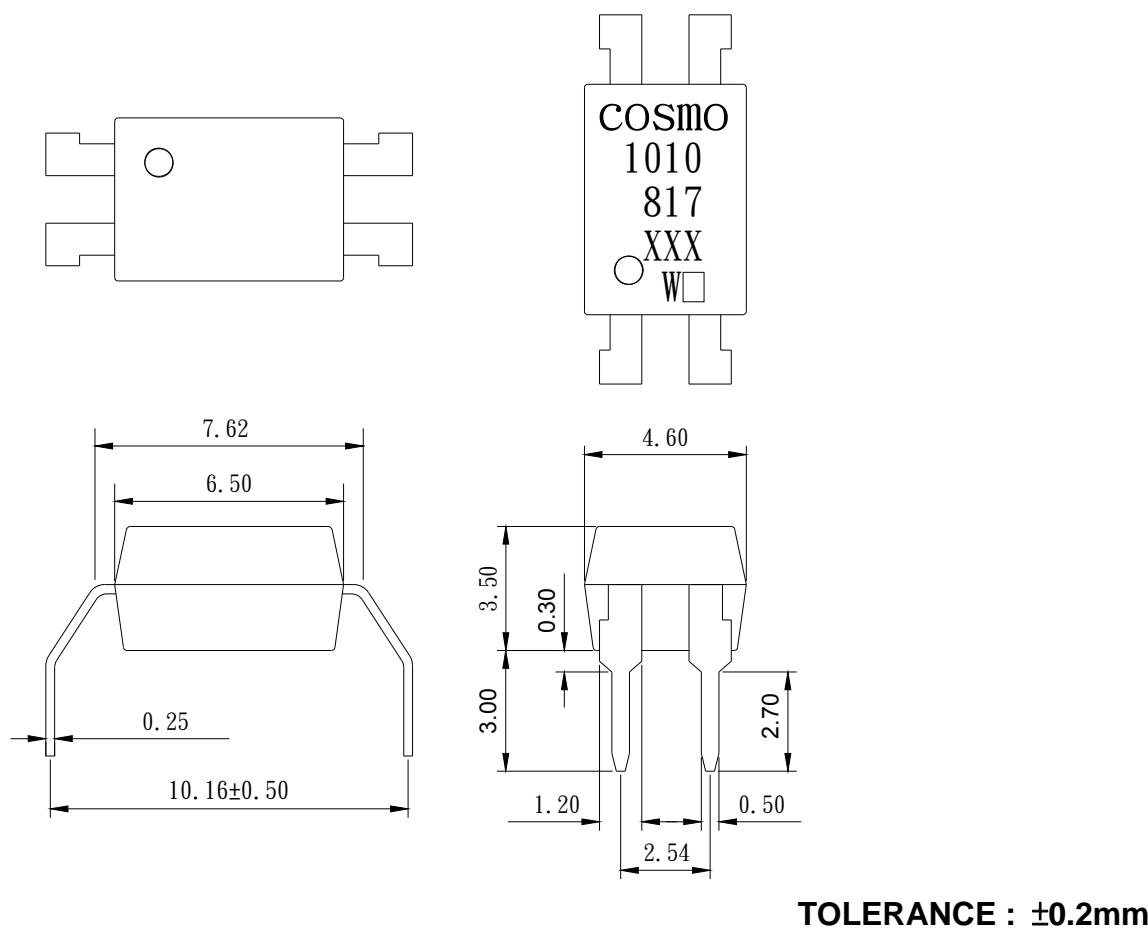

## 2. SCHEMATIC : TOP VIEW

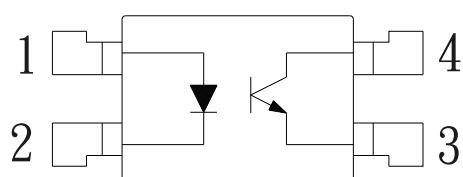

1. Anode
2. Cathode
3. Emitter
4. Collector

# PRODUCT SPECIFICATION

DATE : 12/18/2012

<b>cosmo</b> ELECTRONICS CORPORATION	Photocoupler : <b>K1010 3W</b>	NO.62P00057 SHEET 3 OF 6	REV. 1
---	-----------------------------------	-----------------------------	-----------

## ● Absolute Maximum Ratings

Parameter		Symbol	Rating	Unit
Input	Forward current	I <sub>F</sub>	50	mA
	Peak forward current	I <sub>FM</sub>	1	A
	Reverse voltage	V <sub>R</sub>	6	V
	Power dissipation	P <sub>D</sub>	70	mW
Output	Collector-emitter voltage	V <sub>CEO</sub>	80	V
	Emitter-collector voltage	V <sub>ECD</sub>	6	V
	Collector current	I <sub>C</sub>	50	mA
	Collector power dissipation	P <sub>C</sub>	150	mW
	Junction temperature	T <sub>j</sub>	125	°C
Total power dissipation		P <sub>tot</sub>	200	mW
Isolation voltage 1 minute		V <sub>iso</sub>	5000	Vrms
Operating temperature		T <sub>opr</sub>	-55 to +115	°C
Storage temperature		T <sub>stg</sub>	-55 to +125	°C
Soldering temperature 10 second		T <sub>sol</sub>	260	°C

## ● Electro-optical Characteristics

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Forward voltage	V <sub>F</sub>	I <sub>F</sub> =20mA	-	1.2	1.4	V
	Peak forward voltage	V <sub>FM</sub>	I <sub>FM</sub> =0.5A	-	-	3.0	V
	Reverse current	I <sub>R</sub>	V <sub>R</sub> =4V	-	-	10	μA
	Terminal capacitance	C <sub>t</sub>	V=0, f=1KHz	-	30	-	pF
Output	Collector dark current	I <sub>CEO</sub>	V <sub>CE</sub> =20V	-	-	0.1	μA
Transfer characteristics	Current transfer ratio	CTR	I <sub>F</sub> =0.5mA, V <sub>CE</sub> =5V	50	-	600	%
	Collector-emitter saturation	V <sub>CE(sat)</sub>	I <sub>F</sub> =20mA, I <sub>C</sub> =1mA	-	0.1	0.2	V
	Isolation resistance	R <sub>iso</sub>	DC500V	5x10 <sup>10</sup>	10 <sup>11</sup>	-	Ω
	Floating capacitance	C <sub>f</sub>	V=0, f=1MHz	-	0.6	1.0	pF
	Response time ( Rise )	t <sub>r</sub>	V <sub>CE</sub> =2V, I <sub>C</sub> =2mA, R <sub>L</sub> =100Ω	-	4	18	μs
	Response time ( Fall )	t <sub>f</sub>		-	3	18	μs

# PRODUCT SPECIFICATION

DATE : 12/18/2012

<b>cosmo</b> ELECTRONICS CORPORATION	Photocoupler : <b>K1010 3W</b>	NO.62P00057	REV. 1
SHEET 4 OF 6			

Classification table of current transfer ratio is shown below.

Rank mark	CTR (%)
K10103WA	100 TO 600
K10103WB	200 TO 500
K10103WC	160 TO 400
K10103WD	120 TO 300
K10103WE	50 TO 600

Fig.1 Current Transfer Ratio vs. Forward Current

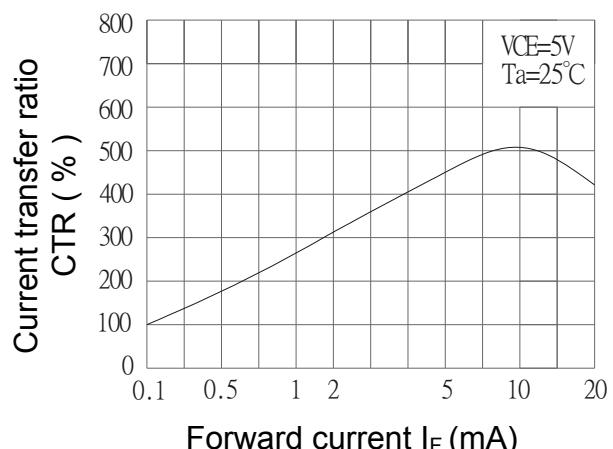


Fig.2 Collector Power Dissipation vs. Ambient Temperature

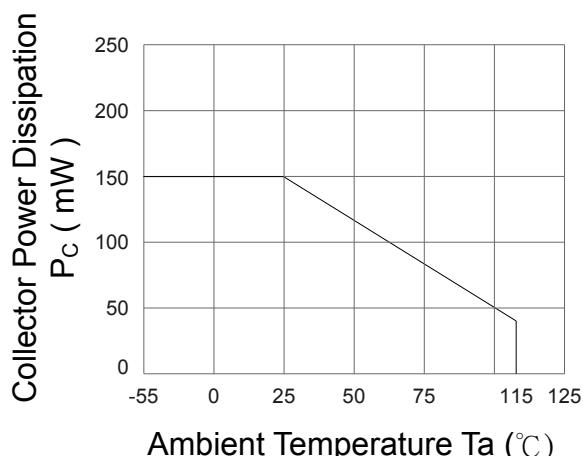


Fig.3 Collector Dark Current vs. Ambient Temperature

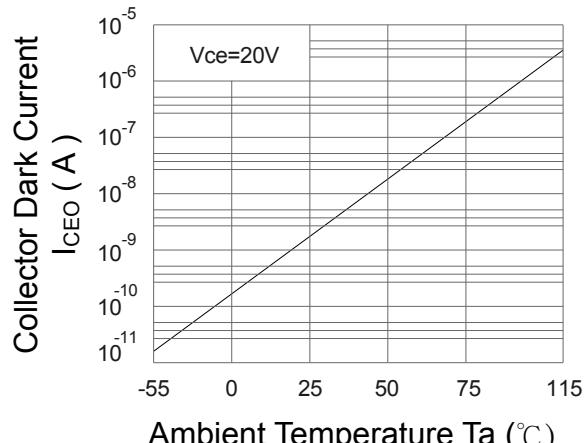


Fig.4 Forward Current vs. Ambient Temperature


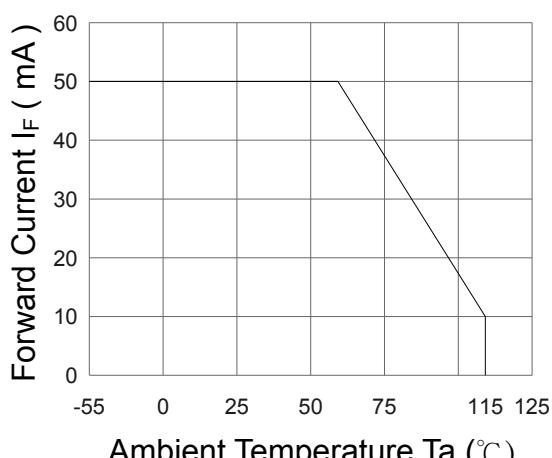


Fig.5 Forward Current vs. Forward Voltage

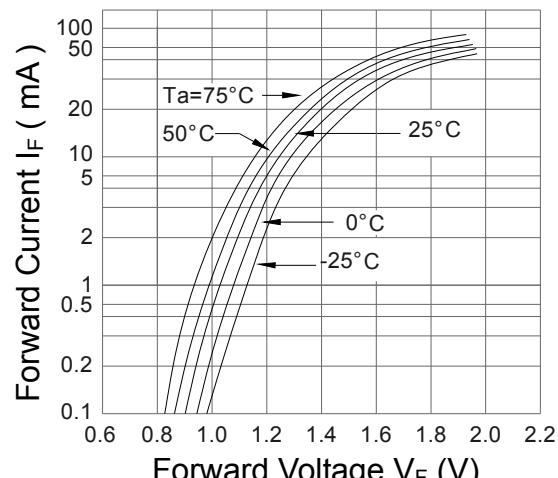

# PRODUCT SPECIFICATION

DATE : 12/18/2012

<b>cosmo</b> ELECTRONICS CORPORATION	<b>Photocoupler :</b> <b>K1010 3W</b>	<b>NO.62P00057</b>	<b>REV.</b> <b>1</b>
		<b>SHEET 5 OF 6</b>	

Fig.6 Collector Current vs.  
Collector-Emitter Voltage

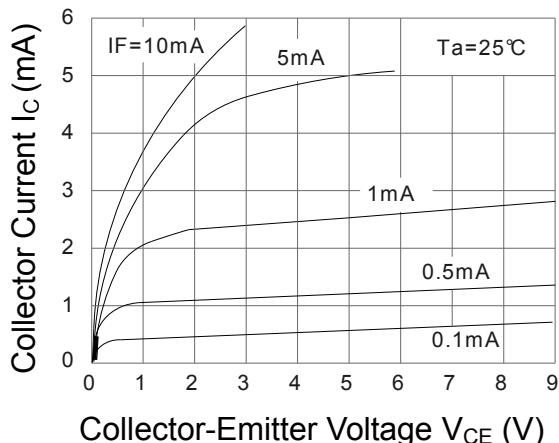


Fig.7 Relative Current Transfer Ratio vs. Ambient Temperature

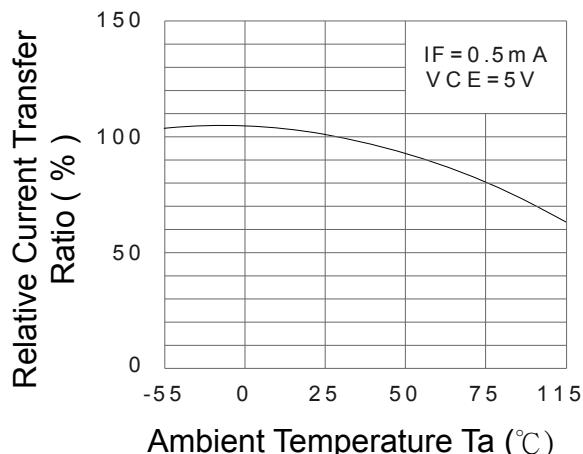


Fig.8 Collector-Emitter Saturation Voltage vs. Ambient Temperature

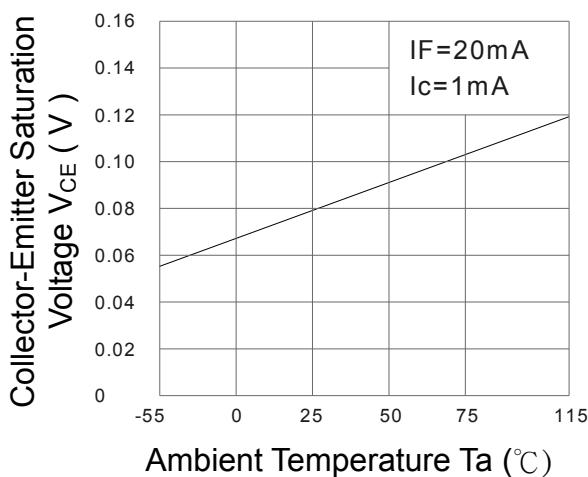


Fig.9 Collector-Emitter Saturation Voltage vs. Forward Current

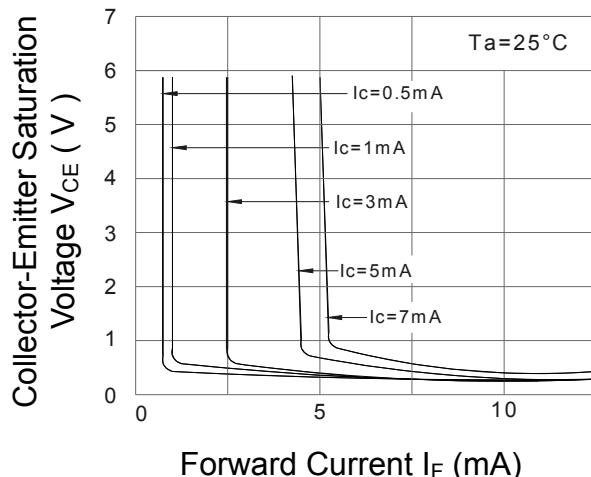


Fig.10 Response Time vs. Load Resistance


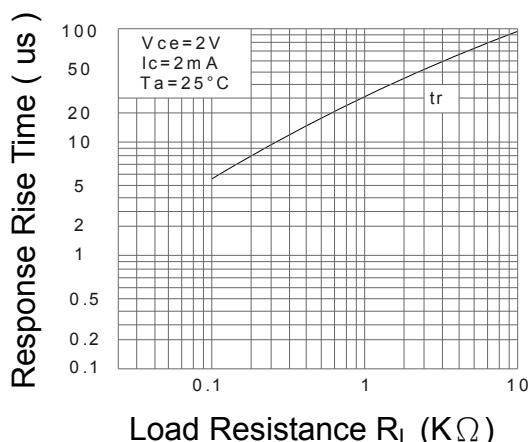


Fig.11 Response Time vs. Load Resistance

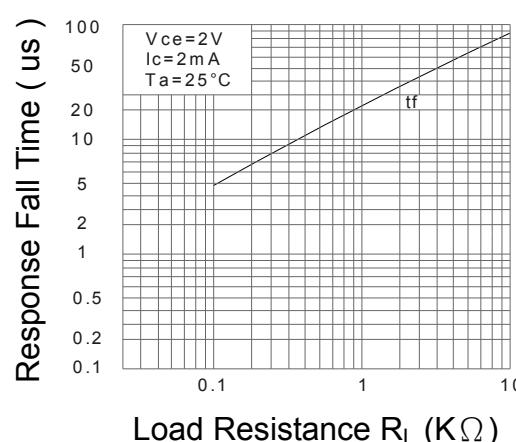

# PRODUCT SPECIFICATION

DATE : 12/18/2012

<b>cosmo</b> ELECTRONICS CORPORATION	Photocoupler : <b>K1010 3W</b>	NO.62P00057 SHEET 6 OF 6	REV. 1
---	-----------------------------------	-----------------------------	-----------

## ● Notice

The information contained in this document is intended to be a general product description and is subject to change without notice. Please contact cosmo in order to obtain the latest device data sheets before using any cosmo device. cosmo does not assume any responsibility for use of any circuitry described. No circuit patent licenses are implied. This publication is the property of cosmo. No part of this publication may be reproduced or copied in any form or by any means, or transferred to any third party without the prior written consent of cosmo Electronics Corporation.

The devices listed in this document are designed for general applications only in electronic equipment. No devices shall be deployed which require higher level of reliability such as :

- Medical and other life support equipments.
- Space application.
- Telecommunication equipment ( trunk lines ).
- Nuclear power control equipment.

Unless it received prior written approval from cosmo.

cosmo takes no responsibility for damages arise form the improper usage of our device. Please contact cosmo for further information regarding the above notices.