


NEW!

Shielded Power Inductors – SLR1075

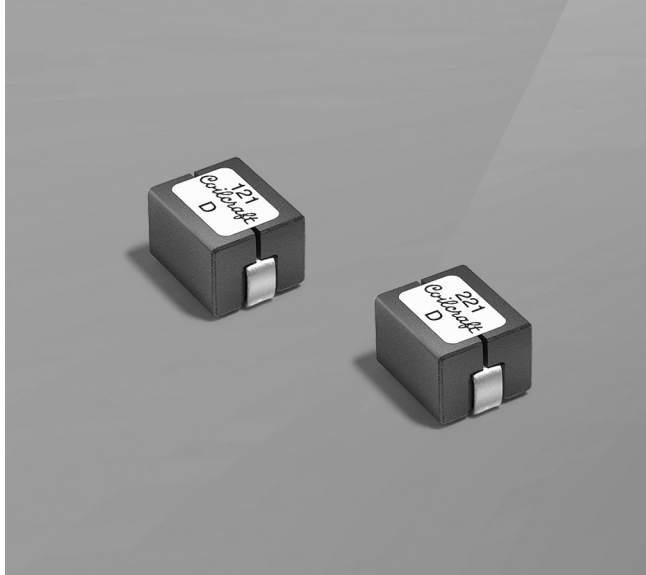

- Tight DCR tolerance for inductor-DCR-based current sensing circuits
- Excellent current handling, up to 93 A
- 10.4 × 8.0 × 7.4 mm surface mount package
- Designed for use in multi-phase VRM/VRD/EVRD regulators

Core material Ferrite**Weight** 3.5 – 3.6 g**Environmental** RoHS compliant, halogen free**Terminations** RoHS compliant matte tin over nickel over copper.**Ambient temperature** –40°C to +85°C with (40°C rise) Irms current.**Maximum part temperature** +125°C (ambient + temp rise).**Storage temperature** Component: –40°C to +125°C.

Tape and reel packaging: –40°C to +80°C

Resistance to soldering heat Max three 40 second reflows at

+260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)**Failures in Time (FIT) / Mean Time Between Failures (MTBF)**

38 per billion hours / 26,315,789 hours, calculated per Telcordia SR-332

Packaging 100/7" reel; 500/13" reel; Plastic tape: 24 mm wide, 0.4 mm thick, 12 mm pocket spacing, 7.75 mm pocket depth**PCB washing** Tested to MIL-STD-202 Method 215 plus an additional aqueous wash. See [Doc787_PCB_Washing.pdf](#).

| Part number ¹ | Inductance ² ±10% (nH) | DCR ±7% (mOhms) | SRF typ (MHz) | Isat (A) ³ | | | Irms (A) ⁴ | |
|--------------------------|--------------------------------------|--------------------|------------------|-----------------------|----------|----------|-----------------------|-----------|
| | | | | at 25°C | at 100°C | at 125°C | 20°C rise | 40°C rise |
| SLR1075-121KE_ | 120 | 0.29 | 59 | 93.0 | 78.5 | 72.0 | 50 | 67 |
| SLR1075-151KE_ | 150 | 0.29 | 48 | 72.0 | 59.0 | 54.0 | 50 | 67 |
| SLR1075-171KE_ | 170 | 0.29 | 44 | 65.0 | 51.5 | 48.0 | 50 | 67 |
| SLR1075-221KE_ | 215 | 0.29 | 36 | 53.0 | 40.0 | 37.0 | 50 | 67 |
| SLR1075-231KE_ | 230 | 0.29 | 35 | 49.0 | 36.5 | 33.5 | 50 | 67 |
| SLR1075-271KE_ | 270 | 0.29 | 30 | 41.0 | 32.0 | 29.5 | 50 | 67 |
| SLR1075-301KE_ | 300 | 0.29 | 27 | 36.0 | 26.5 | 24.0 | 50 | 67 |

1. When ordering, please specify **packaging** code:**SLR1075-301KEC****Packaging:** **C** = 7" machine-ready reel. EIA-481 embossed plastic tape (100 parts per full reel).**B** = Less than full reel. In tape, but not machine ready. To have a leader and trailer added (\$25 charge), use code letter C instead.**D** = 13" machine-ready reel. EIA-481 embossed plastic tape. Factory order only, not stocked (500 parts per full reel).

2. Inductance at 100 kHz, 0.1 Vrms, 0 Adc.

3. DC current that causes an inductance drop of 20% (typ) from its value without current.

4. Current that causes the specified temperature rise from 25°C ambient. This information is for reference only and does not represent absolute maximum ratings.

5. Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

Irms Testing

Irms testing was performed on 0.75 inch wide × 0.25 inch thick copper traces in still air.

Temperature rise is highly dependent on many factors including pcb land pattern, trace size, and proximity to other components. Therefore temperature rise should be verified in application conditions.



www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com**UK** +44-1236-730595 sales@coilcraft-europe.com**Taiwan** +886-2-2264 3646 sales@coilcraft.com.tw**China** +86-21-6218 8074 sales@coilcraft.com.cn**Singapore** + 65-6484 8412 sales@coilcraft.com.sg

Document 1306-1 Revised 12/22/15



© Coilcraft Inc. 2016

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.

NEW!


SLR1075 Shielded Power Inductors

L vs Frequency

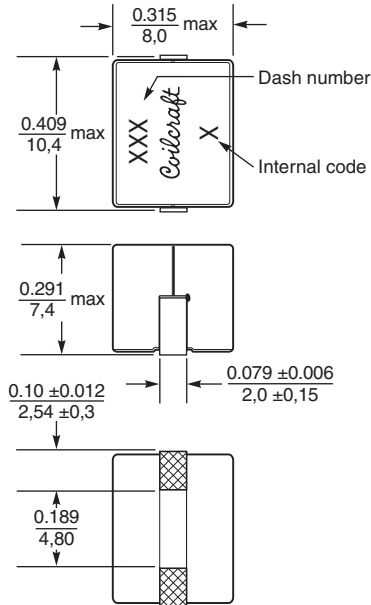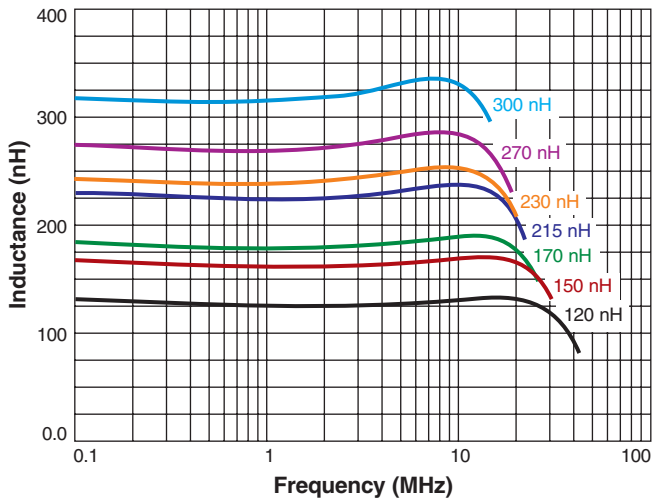

Dimensions are in $\frac{\text{inches}}{\text{mm}}$








Recommended Land Pattern



NEW!

SLR1075 Shielded Power Inductors

L vs Current

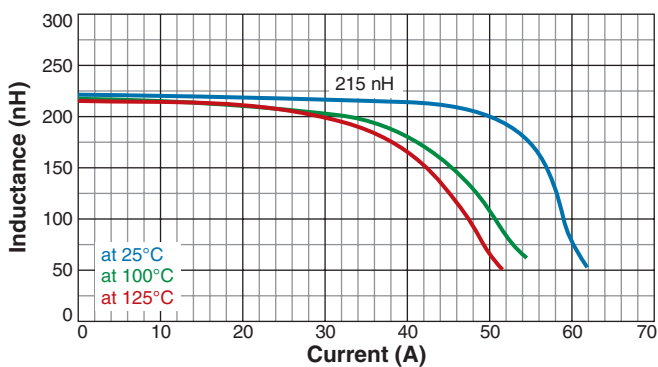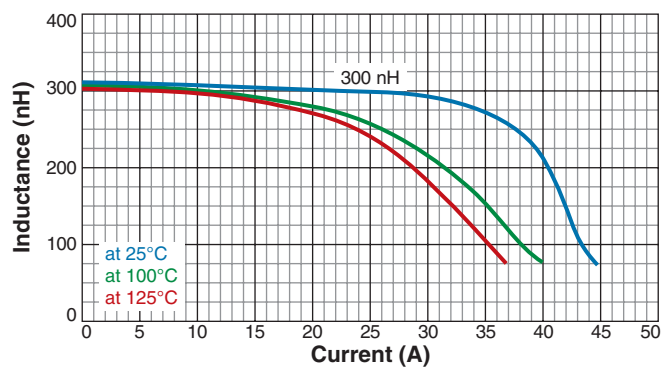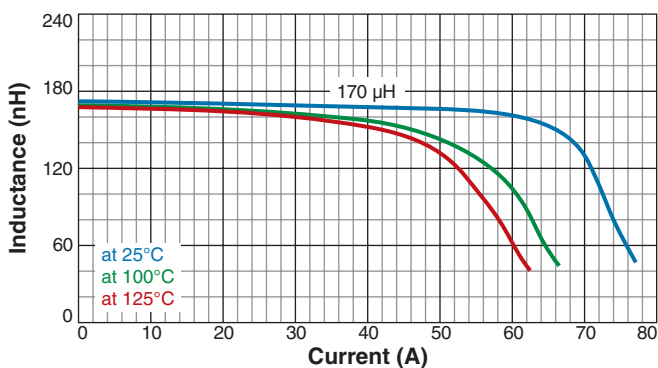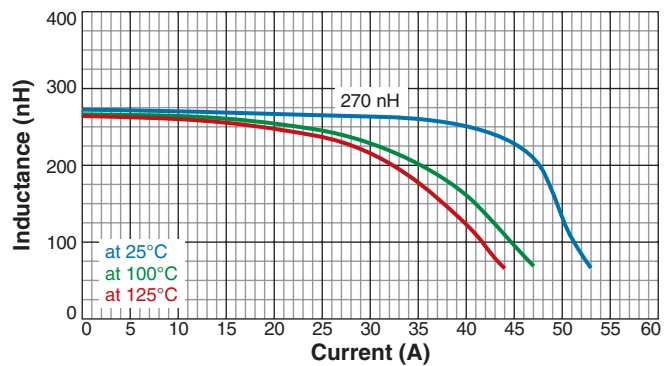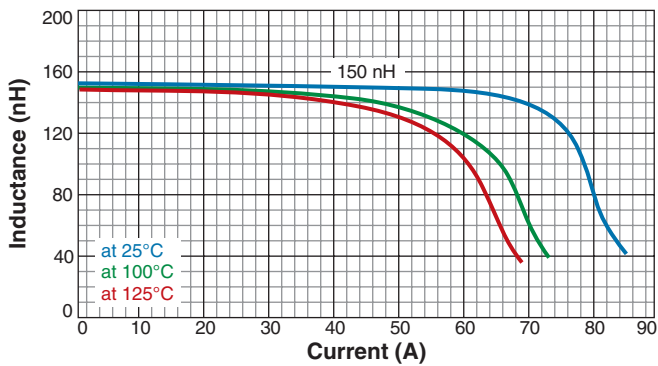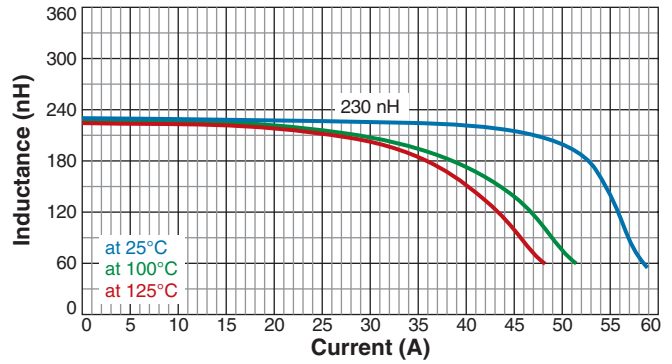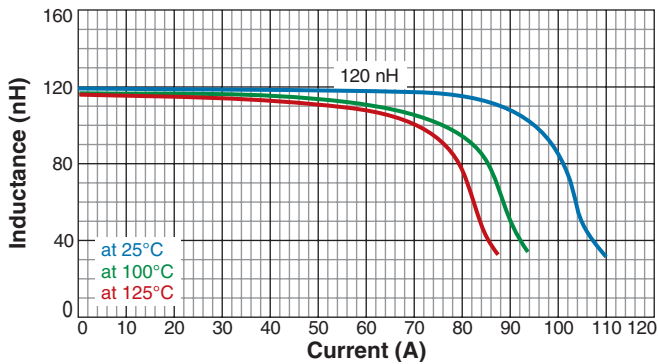

US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore +65-6484 8412 sales@coilcraft.com.sg

Document 1306-3 Revised 12/22/15
 © Coilcraft Inc. 2016
 This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.